

THE ELECTRIC AUTO-LITE COMPANY

TOLEDO, OHIO

PARTS LIST SPECIAL LETTER

Date Sept. 14, 1937

Pages 1 Page No. 1

Serial No. PL-2

SUBJECT: RADIO ROTORS

Supersedes _____
Same as Manual Bulletin
IG-13

TO AUTO-LITE SERVICE STATIONS:

As a result of a demand from our field organization we have from time to time made up special radio rotors for our more popular types of distributors. These rotors carry a longer contact arm than the standard rotor so as to reduce to a minimum the length of spark between the rotor tip and the distributor cap terminals. Not only does this shorter gap reduce to a minimum ignition interference in the radio but it also reduces the amount of resistance which must be overcome by the ignition coil secondary current where radio suppressors are used in the secondary circuit.

The radio rotors can easily be identified by the letter "R" stamped on the outer end of the rotor contact strip.

The following list shows the radio rotors now carried in stock together with the standard production rotor which they will replace.

RADIO ROTORS to replace PRODUCTION ROTORS

IGB-1002B	IGB-1002, IGB-1002C
IGH-1041A	IGH-1041
IGF-1016A	IGF-1016
IGS-1016A	IGS-1016

In the above list you will note there is no radio rotor to be used in place of our current IGB-1239 rotor. While we at one time carried an IGB-1239A radio rotor this has now been dropped in view of the fact that the standard IGB-1239 rotor has been changed to the same dimensions as the radio rotor.

These special radio rotors are now available thru your regular source of supply and are recommended for use on cars equipped with radios.

Yours very truly,
THE ELECTRIC AUTO-LITE COMPANY
Parts and Service Division

EDH:LEK



THE ELECTRIC AUTO-LITE COMPANY

TOLEDO, OHIO

PARTS LIST SPECIAL LETTER

Date July 28, 1941

Pages 1 Page No. 1

Serial No. PL-4

SUBJECT: DISTRIBUTOR DRIVE SHAFT ASSEMBLIES

Supersedes _____

A change has been made in the construction of distributor drive shafts and distributor cam assemblies. The weight carrying plate is now welded to the shaft and the yoke is now welded to the cam where formerly these parts were staked together. This change is effective on all parts now being manufactured. These two styles of construction are interchangeable if the proper washers are used. It is necessary in some assemblies that the anti-rattle spring be changed.

The illustrations below show the differences in appearance of the two types of construction. In Figure 1 "A" is a drive shaft with the plate staked to the shaft while "B" is an assembly with the welded construction. Figure 2 illustrates the difference in cam assemblies between the staked construction "A" and the welded construction "B".

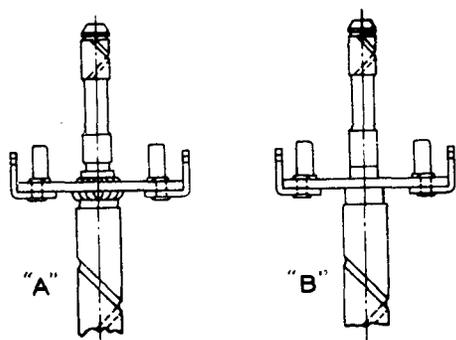


FIG. 1

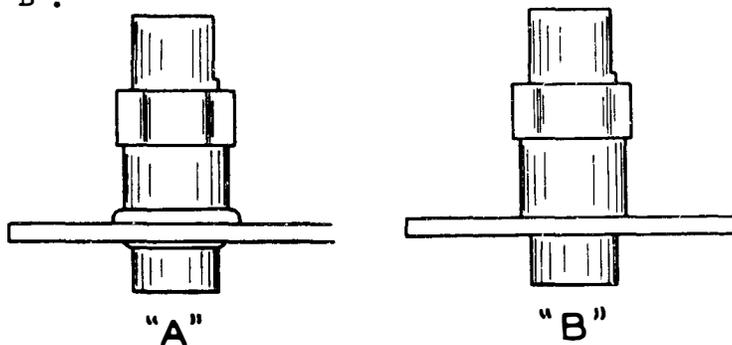


FIG. 2

It is suggested that a supply of the necessary washers and springs to service both types of shafts or cams be obtained. These washers and springs with their applications are tabulated below:

Thrust washer between distributor base and weight carrying plate:

	Staked Shafts	Welded Shafts
IGC, IGE, IGS, IGT, IGW Types	IG-90	IGS-104
IGB, IGC, IGE, IGH, IGK, IGL, IGM,	IGB-162	IGS-104
IGO, IGP, IGR, IGS, IGT Types	IGW-46	IGS-104
IGW		

Thrust washer between weight carrying plate and cam assembly:

	Staked Shafts	Welded Shafts
IGC, IGE, IGH, IGK, IGP, IGR,	IGK-26	IGS-99
IGS, IGT Types	IGW-36	IGW-92
IGW	IGW-59	IGW-92

	Staked Cam	Welded Cam
Anti-Rattle Spring - L.H.	IGE-36	IGT-69
- R.H.	IGE-35	IGT-70

It is not necessary to change to a welded type cam if a welded shaft is used. It is only necessary to change the two washers as indicated. Likewise when a welded cam is installed on either a staked or welded shaft it is only necessary to change the anti-rattle spring provided that this part is used in the assembly being worked on.

THE ELECTRIC AUTO-LITE COMPANY

TOLEDO, OHIO

PARTS LIST SPECIAL LETTER

Date July 1, 1954

Pages 1 Page No. 1

Serial No. PL-5

SUBJECT: Replacement of IAU-3076LA by IBB-2015R

Supersedes _____

The IAU-3076LA has been used on 8 cylinder distributors up until late 1953. Since that time the IBB-2015R has been used. Either of these condensers can be mounted on the breaker plate.

Figure 1 illustrates the method of installing both condensers. As will be noted, the mounting is the same but the leads are connected to different primary terminals. When installing the IBB-2015R, the breaker arm spring and connector are placed against the outside of the lug with the condenser strap next. The terminal of the primary lead is then placed over the lug, connector and strap.

The illustration shows the IAZ-2004R breaker plate, however, it applies to other double breaker 8 cylinder distributors which have similar contact and condenser installation.

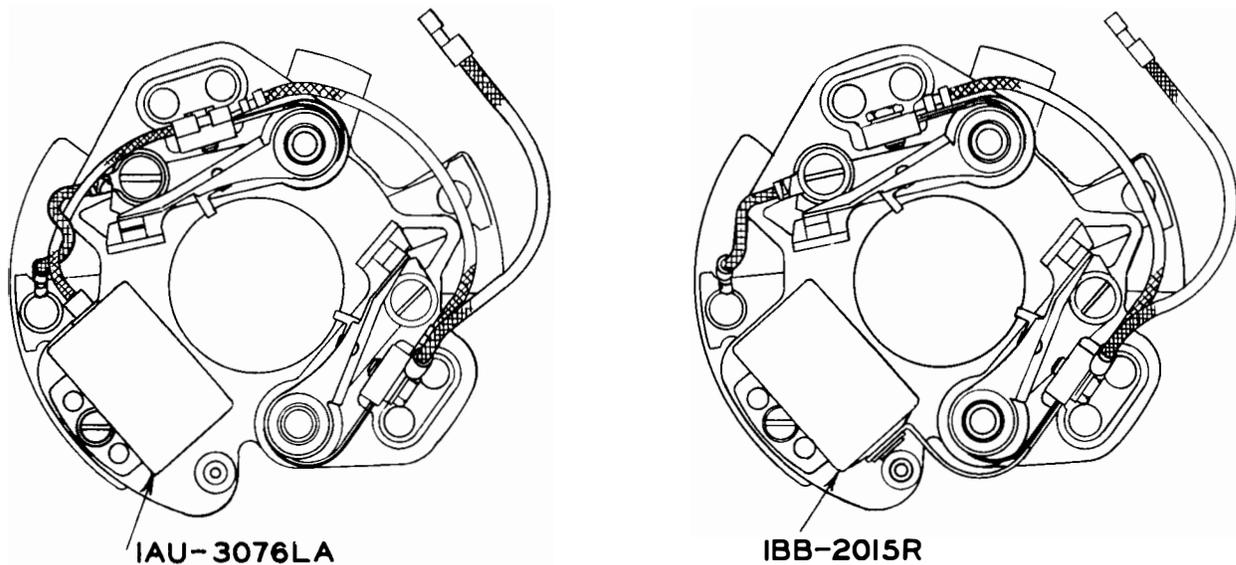


Figure 1


ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD-4000 SERIES DISTRIBUTOR PARTS LISTS

IAD-4000 Series
(Issued 12-12-56)

Model No.	No. Cyl.	CUSTOMER
IAD-4001	4	National Farm Mach.
IAD-4003	6	Ward LaFrance, Continental
IAD-4005A	6	Federal, Studebaker Tr., Reo Tr., Hercules
IAD-4006	6	Autocar, White
IAD-4007	6	Federal, Diamond T., Oshkosh, Kenworth
IAD-4008	4	Willys, Ford
IAD-4008A	4	Willys
IAD-4009	6	Hall Scott
IAD-4010A	4	B. F. Avery
IAD-4010C	4	B. F. Avery
IAD-4010D	4	Hercules
IAD-4011	6	Waukesha
IAD-4011A	6	Southern
IAD-4012A	6	John Deere, Hercules
IAD-4015	6	Buda
IAD-4016A	6	Diamond T., Crown Body, Hercules
IAD-4017A	6	Autocar
IAD-4018	4	Continental
IAD-4018A	4	Continental
IAD-4019A	6	Diamond T., Hercules
IAD-4019A-1	6	Diamond T.
IAD-4020A	4	Continental, Massey-Harris
IAD-4020B	4	Massey-Harris
IAD-4023A	4	B. F. Avery
IAD-4024	4	Cockshutt Plow
IAD-4025	6	Diamond T., Worthington
IAD-4026A	6	Diamond T., Continental
IAD-4026C	6	Diamond T., Continental
IAD-4027	6	Massey-Harris
IAD-4027A	6	Massey-Harris, Worthington
IAD-4028A	4	Aerco, Continental
IAD-4029	4	Continental, Hall Scott
IAD-4029-1	4	Continental
IAD-4029A	4	Continental
IAD-4029A-1	4	Continental
IAD-4030	4	Massey-Harris
IAD-4031	4	Hercules
IAD-4032	6	Buda, LeTourneau
IAD-4033	6	Continental
IAD-4033A	6	Continental
IAD-4034	6	Maxim Mtr., Hercules
IAD-4034A	6	Diamond T.
IAD-4035	6	Diamond T.
IAD-4036A	4	Wisconsin
IAD-4037	4	Hercules
IAD-4038	4	Crosley (Industrial)
IAD-4039-1	6	Chrysler (Industrial)
IAD-4040-1	6	Chrysler (Industrial)
IAD-4041	4	Willys
IAD-4042	2	Lycoming
IAD-4043	4	Cockshutt, Co-op
IAD-4043A	4	Hercules
IAD-4044	6	Hercules

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS


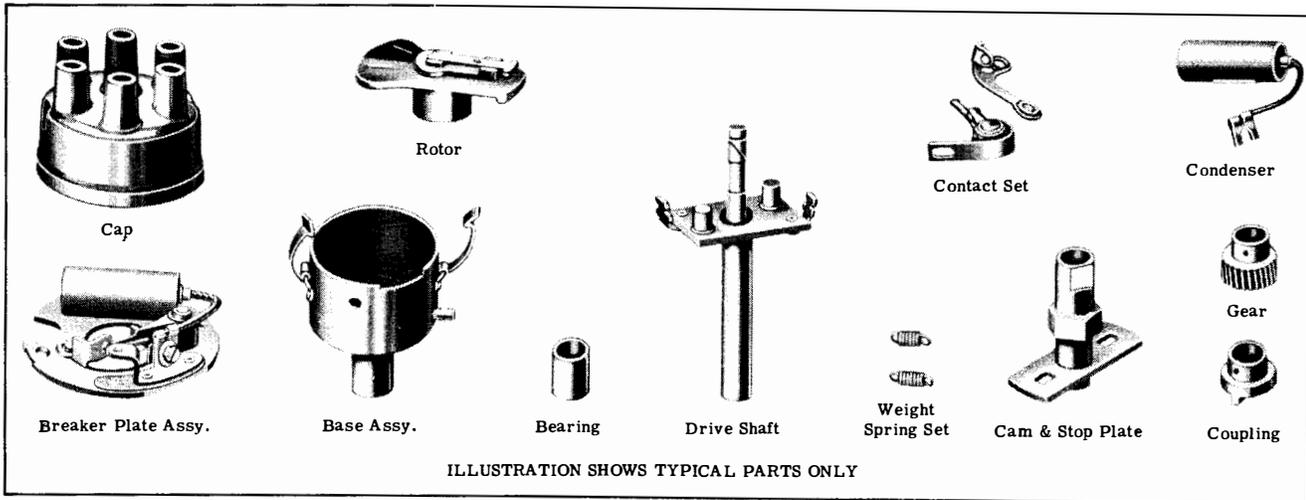


Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IAD-4001	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1171LB	IG-636QS	IAD-1100L-1	IG-644
IAD-4003	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2019	IG-579A	IGS-1053LE	IGE-30CS	IAD-1100LA	IG-644A
IAD-4005A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2019	IG-579A	IGS-1180R	IGB-351S	IAD-1100R	GE-41S
IAD-4006	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2019	IG-579A	IGC-1130RE	IGE-24S	IAD-1100RA	IG-644A
IAD-4007	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053RE	IGE-24S	IAD-1100RG	IG-644A
IAD-4008	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1134LA	IGB-350S	IAD-1100LB-1	- - -
IAD-4008A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1134LA	IG-884S	IAD-1100LB-1	- - -
IAD-4009	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2023	IG-579A	IGS-1152R	IGB-352S	IAD-1100R	- - -
IAD-4010A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1180R	IGE-30JS	IAD-1100RB-1	- - -
IAD-4010C	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1180R	IGE-30S	IAD-1100RC-1	- - -
IAD-4010D	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1180R	IGE-30S	IAD-1100RC-1	- - -
IAD-4011	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGC-1130RE	IG-775S	IAD-1100RC	- - -
IAD-4011A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053RE	IGB-284S	IAD-1100RL	GE-81
IAD-4012A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGE-24S	IAD-1100RG	- - -
IAD-4015	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053RE	IG-784S	IAD-1100RB	- - -
IAD-4016A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2029	IG-579A	IGS-1164R	IGE-24S	IAD-1100RE	GE-80
IAD-4017A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2040	IG-579A	IGS-1180R	IGC-213S	IAD-1100RG	GE-82
IAD-4018	IG-1324E	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2042	IG-579A	IGS-1171LB	IGB-327FS	IAD-1100LD-1	IG-644
IAD-4018A	IG-1324E	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2042	IG-579A	IGS-1171LB	IGC-42LS	IAD-1100LF-1	IG-644
IAD-4019A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1180R	IGE-29S	IAD-1100RH	GE-41S
IAD-4019A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1180R	IGE-29S	IAD-1100RH	GE-41S
IAD-4020A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1151L	IG-784AS	IAD-1100LE-1	GE-68
IAD-4020B	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1151L	IGB-327DS	IAD-1100LA-1	GE-68
IAD-4023A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1180R	IGB-292SS	IAD-1100RD-1	- - -
IAD-4024	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1053RB	IG-636AS	IAD-1100RE-1	IG-644
IAD-4025	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2018A	IG-579A	IGS-1150LA	IGB-317AS	IAD-1100LE	IGC-1180
IAD-4026A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2018A	IG-579A	IGS-1180R	IGB-327KS	IAD-1100RJ	GE-83
IAD-4026C	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2018A	IG-579A	IGS-1180R	IGB-284ES	IAD-1100RL	GE-83
IAD-4027	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2042	IG-579A	IGS-1053LD	IGB-265AS	IAD-1100LF	IG-644
IAD-4027A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2042	IG-579A	IGS-1053LD	IG-884AS	IAD-1100LF	IG-644
IAD-4028A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1151RC	IG-884S	IAD-1100RA-1	GE-79
IAD-4029	IG-1324E	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2044	*GBF-79A	IAD-1056R	IGB-327FS	IAD-1100RC-1	IAD-50
IAD-4029-1	IG-1324E	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2044	*GBF-79A	IAD-1056R	IGB-327FS	IAD-1100RC-1	IAD-50
IAD-4029A	IG-1324E	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2044	*GBF-79A	IAD-1056R	IGE-29S	IAD-1100RG-1	IAD-50
IAD-4029A-1	IG-1324E	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2044	*GBF-79A	IAD-1056R	IGE-29S	IAD-1100RG-1	IAD-50
IAD-4030	IG-1324E	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2042	IG-579A	IGS-1171LB	IG-727AS	IAD-1100LG-1	IG-644
IAD-4031	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2001D	IG-579A	IGS-1180R	IGB-210DS	IAD-1100RG-1	- - -
IAD-4032	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2060	*IG-579A	IGS-1174R	IGB-208S	IAD-1100RN	† - -
IAD-4033	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2044	*GBF-79A	IAD-1056R	IGB-327ES	IAD-1100RP	IAD-50
IAD-4033A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2044	*GBF-79A	IAD-1056R	IGB-328LS	IAD-1100RN	IAD-50
IAD-4034	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2061	*IG-579A	IGS-1191R	IGB-208S	IAD-1100RE	† - -
IAD-4034A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2061	*IG-579A	IGS-1191R	IGB-208S	IAD-1100RE	†GE-80
IAD-4035	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2062	*IG-579A	IGS-1197L	IGB-327BS	IAD-1100LE	†IGC-1180
IAD-4036A	IG-1324D	IG-1657RA	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	*IG-579A	IGS-1180L	IGC-211S	IAD-1100LH-1	GE-89
IAD-4037	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1201R	IGC-501S	IAD-1100RC-1	- - -
IAD-4038	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2066	IG-579A	IGS-1202L	IGC-203S	IAD-1100LJ-1	- - -
IAD-4039-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2021	IG-579A	IGS-1113RE	IG-636HS	IAD-1100RH	- - -
IAD-4040-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2021	IG-579A	IGS-1112RE	IG-636NS	IAD-1100RB	- - -
IAD-4041	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2069	IG-579A	IGS-1134LD	IG-884S	IAD-1100LB-1	- - -
IAD-4042	IG-1324G	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180L	IG-817S	IAD-1100L-4	- - -
IAD-4043	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-252S	IAD-1100RH-1	IAD-72
IAD-4043A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-252S	IAD-1100RH-1	- - -
IAD-4044	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-252S	IAD-1100RL	- - -

† See Miscellaneous Parts Section for Tachometer Drive Gears.
 * See Miscellaneous Parts Section for other Bearings.

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used on
	IAT-44	1	IAD-4041
	IG-1860A	1	IAD-4038
	IG-1860A-1	1	IAD-4028A
	IG-2860A-3	1	IAD-4001, IAD-4010A, C, D, IAD-4018, A, IAD-4020A, B
	IG-2902F-4	1	IAD-4007
	IGB-1154B	1	IAD-4027, A, IAD-4030
	IGB-2296A	1	IAD-4019A
	IGC-2024AE-15	1	IAD-4019A-1
	IGC-2024F-3	1	IAD-4015
	IGC-2024F-19	1	IAD-4032
	IGC-2024N-2	1	IAD-4011, A, IAD-4012A, IAD-4023A
	IGC-2052	1	IAD-4003
	IGC-2155	1	IAD-4016A, IAD-4034, A
	IGE-69	1	IAD-4009
	IGS-114	1	IAD-4039-1, IAD-4040-1
	IGS-1020	1	IAD-4005A, IAD-4024, IAD-4031
	IGS-1020-1	1	IAD-4025, IAD-4026A, C, IAD-4035
	IGS-1080	1	IAD-4008, A
	IGS-2020-1	1	IAD-4006
IGS-2020-5	1	IAD-4017A	
	BEARINGS		
	(A) Ball, S. A. E. #202, Tach. Drive	X-294	1 IAD-4032, IAD-4034, A, IAD-4035
(B) Bronze Shaft & Coupling	IAD-58	2 IAD-4029, -1, A, A-1, IAD-4033, A	
	BRACKETS		
	(B) Breaker Plate Mtg.	IAD-9	2 All
	(C) Cap Spring	IAD-14	2 All
	(A) Coil	IAD-45	2 IAD-4029, A, IAD-4033, A
	BUSHING INSULATING TERMINAL STUD	IAD-10	1 All
	CLIP CONTACT ARM SPRING	IG-676	1 All
	COIL, Ignition	CR-6005	1 IAD-4029, A, IAD-4033, A
	COLLARS		
	(A) Dist. Shaft	IGB-199	1 IAD-4008, A, IAD-4038, IAD-4041
(B) Dist. Shaft	IGS-19S	1 IAD-4039-1, IAD-4040-1	
	CONNECTOR, Terminal Stud	IAD-7	1 All
	CONTACT, Dist. Cap Plunger	IG-514	1 All
	COUPLING, Shaft & Coupling Assy.	IAD-55	1 IAD-4029, -1, A, A-1, IAD-4033, A
	COVERS		
	(A) Plate, Shaft & Coupling	IAD-51	1 IAD-4029, -1, A, A-1, IAD-4033, A
(B) Tachometer Shaft Housing	IGS-38	1 IAD-4032, IAD-4034, A, IAD-4035	
	CUP, Grease	X-382	1 IAD-4017A, IAD-4018, A, IAD-4027, A, IAD-4029, -1, A-1, A, IAD-4030, IAD-4032, IAD-4033, A, IAD-4034
	GASKET, Oil Seal	IAD-57	1 IAD-4029, -1, A, A-1, IAD-4033, A
	GEAR		
	(A) Tachometer Drive	GE-47	1 IAD-4032, IAD-4034, A, IAD-4035
(B) Tachometer Follower	GE-48	1 IAD-4032, IAD-4034, A, IAD-4035	
	INSULATION, Terminal Stud (Inner)	IAD-8	1 All
	KEY, Woodruff #212	X-1460A	1 IAD-4029, -1, A, A-1, IAD-4033, A
	LOCKWASHERS		
	(B) Advance Arm, 1/4	12X-199	1 IAD-4039-1, IAD-4040-1, IAD-4041
	(B) Coil Bracket Sc. #10	X-196	2 IAD-4029, A, IAD-4033, A
	(C) Condenser & Clamp Sc. #6	12X-194	2 All
	(C) Connector Sc. #6	12X-194	1 All
	(A) Gear Sc.	IAD-49	1 IAD-4029, -1, A, A-1, IAD-4033, A
	(B) Terminal Sc., Base #10	X-196	1 IAD-4003, IAD-4006, IAD-4017A
(B) Terminal Stud #10	12X-196	2 All	
	NUTS		
	(B) Bracket Coil, Sq. #10-32	X-794	2 IAD-4029, A, IAD-4033, A
(A) Terminal Stud, Hex. #10-32	8X-173	2 All	
	OILERS		
	(A) Sleeve Oiler	X-490A	1 IAD-4001 Thru IAD-4016A, IAD-4019A, A-1, IAD-4023A, IAD-4024, IAD-4025, IAD-4026, A, C, IAD-4028A, IAD-4031, 4036A, 4037, 4038, 4041, 4042, 4043, A, 4044
(B) Elbow Oiler	X-1590	1 IAD-4020A, B, IAD-4039-1, IAD-4040-1	
	"O" Ring	XA-744W	1 IAD-4008, A, IAD-4041
	PLATE, Breaker	IAD-1004	1 All
	PLATE ASSEMBLY, SEAL	IAD-2015	1 All

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD- 4101A DISTRIBUTOR PARTS LIST

IAD- 4101A
(Issued 9- 14- 56)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GB- 31	1	Rivet, Gear	IG- 816	1	Washer, Thrust, Advance Arm
GE- 68A	1	Gear, Follower, Dist.	IG- 1324D	1	CAP ASSY., DIST.
IAD- 1100RK- 1	1	Cam & Stop Plate, 4 Cyl. R. H.	IG- 514	1	Contact, Plunger
IAD- 2004	1	Plate Assy., Breaker	IG- 515A	1	Spring, Contact
IAD- 1004	1	Plate, Breaker	IG- 1657R	1	ROTOR
IG- 676	1	Clip, Spring, Contact Arm	IG- 1860A- 1	1	Arm, Advance
IGC- 175	1	Screw, Brkr. Spring Clamp, Hex. Hd. #6- 32x5/16	IGB- 328CS	1	Spring Set, Gov. Weight
IGP- 3028 FS	1	CONTACT SET, BREAKER	IGC- 2168R	2	Weight, Governor
IGW- 3139	1	CONDENSER	IGH- 28	1	Wick, Felt, Cam Sleeve
12X- 194	2	Lockwasher, Condenser & Clamp Sc., #6	IGS- 99	1	Spacer, Cam
8X- 350	1	Washer, Plain, Brkr. Contact Lock Sc., #8	IGS- 104	1	Washer, Thrust, Drive Shaft, Upper
8X- 353	1	Washer, Plain, Clamp Sc., #6	IGS- 117A	1	Wick, Felt
8X- 884	1	Screw, Lock, Brkr. Contact, Fill. Hd. #8- 32x3/16	IGS- 1151R	1	Shaft, Drive
8X- 1546	1	Screw, Condenser Mtg., Fill. Hd. #6- 32x5/32	IGZ- 90	1	Washer, Thrust, Drive Shaft, Lower
IAD- 2015	1	Plate Assy., Seal	12X- 194	1	Lockwasher, Connector Sc. #6
IAD- 12	1	Washer, Felt	8X- 301	1	Screw, Connector, Rd. Hd. #6- 32x3/16
IAD- 2017	1	Base Assy., Dist.	X- 382	1	Cup, Grease, 1/8 Pipe
IAD- 7	1	Connector, Term. Stud	X- 2878	2	Screw, Brkr. Plate Mtg., Fill. Hd. #10- 32x5/16
IAD- 8	1	Insulation, Term. Stud, Inner			
IAD- 9	2	Bracket, Brkr. Plate Mtg.			
IAD- 10	1	Bushing, Insulating, Term. Stud			
IAD- 14	2	Bracket, Cap Spring			
IG- 579A	2	BEARING, ABS, BRONZE			
IGL- 8A	1	Stud, Terminal, Primary			
IGL- 9	1	Washer, Insulating, Term. Stud			
IGZ- 9	2	Spring, Clamp, Cap			
8X- 173	2	Nut, Term. Stud, Hex. #10- 32			
8X- 183A	1	Washer, Plain, Term. Stud, #10			
12X- 196	2	Lockwasher, Term. Stud, #10			
X- 525	4	Rivet, Tubular			
IG- 94	5	Terminal, H. T. Wire			
IG- 680	1	Snap Ring, Cam Retaining			

UNIT	APPLICATION
IAD- 4101A	J. I. Case

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD-4201,-1 DISTRIBUTOR PARTS LIST

IAD-4201,-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAD-1100R-2	1	Cam, & Stop Plate, 6 Cyl., R.H.	IGC-1107S	1	CAP ASSY., DIST.
IAD-2004	1	Plate Assy., Breaker	IG-514	1	Contact, Plunger
IAD-1004	1	Plate, Breaker	IG-515A	1	Spring, Contact
IG-676	1	Clip, Spring, Contact Arm	IGS-32	1	Plug, Vent. Hole, Rubber
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGH-28	1	Wick, Felt, Cam Sleeve
IGP-3028FS	1	CONTACT SET, BREAKER	IGS-19S	1	Collar, Shaft
IGW-3139	1	CONDENSER	IGS-99	1	Spacer, Cam
8X-350	1	Washer, Plain, Contact Lock Screw, #8	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
8X-353	1	Washer, Plain, Clamp Sc., #6	*	1	Arm, Advance
8X-884	1	Screw, Lock Breaker Contact Fill. Hd. #8-32x3/16	IGS-1016B	1	ROTOR
X-1012	2	Lockwasher, Condenser & Clamp Screw, #6	IGS-2113RA	1	Shaft & Gov. Assy.
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	IG-636HS	1	Spring Set, Gov. Weight
IAD-2015	1	Plate Assy., Seal	IG-1456	2	Weight, Governor
IAD-12	1	Washer, Felt	IGS-1113R	1	Shaft, Drive
IAD-2021A	1	Base Assy., Dist.	SW-213	1	Rivet, Collar, Drive Shaft
IAD-7	1	Connector, Term. Stud	*	1	Screw, Advance Arm, Hex. Hd., 1/4-20x1/2
IAD-8	1	Insulation Term. Stud, Inner	12X-194	1	Lockwasher, Connector Screw, #6
IAD-10	1	Bushing, Ins., Term. Stud	8X-301	1	Screw, Connector, Rd. Hd., #6-32x3/16
IG-579A	2	Bearing, Absorbent Bronze	*	1	Washer, Skpf., Advance Arm. Mtg., 1/4
IGL-8A	1	Stud, Terminal	X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd., #10-32x5/16
IGL-9	1	Washer, Ins., Term. Stud			1 2 3 4 5
IGS-117	1	Wick, Felt			
8X-173	1	Nut, Term. Stud, Hex. #10-32			
8X-183A	1	Washer, Plain, Term. Stud, #10			
12X-196	1	Lockwasher, Term. Stud, #10			
X-1590	1	Oiler, Press in, 1/4			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-94	7	Terminal, H.T. Wire			
IG-680	1	Snap Ring, Cam Retaining			

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Arm. Advance	Screw	Washer
IAD-4201	None	None	None
IAD-4201-1	IGS-114	8X-85	X-1711

UNIT	APPLICATION
IAD-4201,-1	Chrysler Industrial


(Issued 1-22-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IAD-4201-1 DISTRIBUTOR PARTS ILLUSTRATION

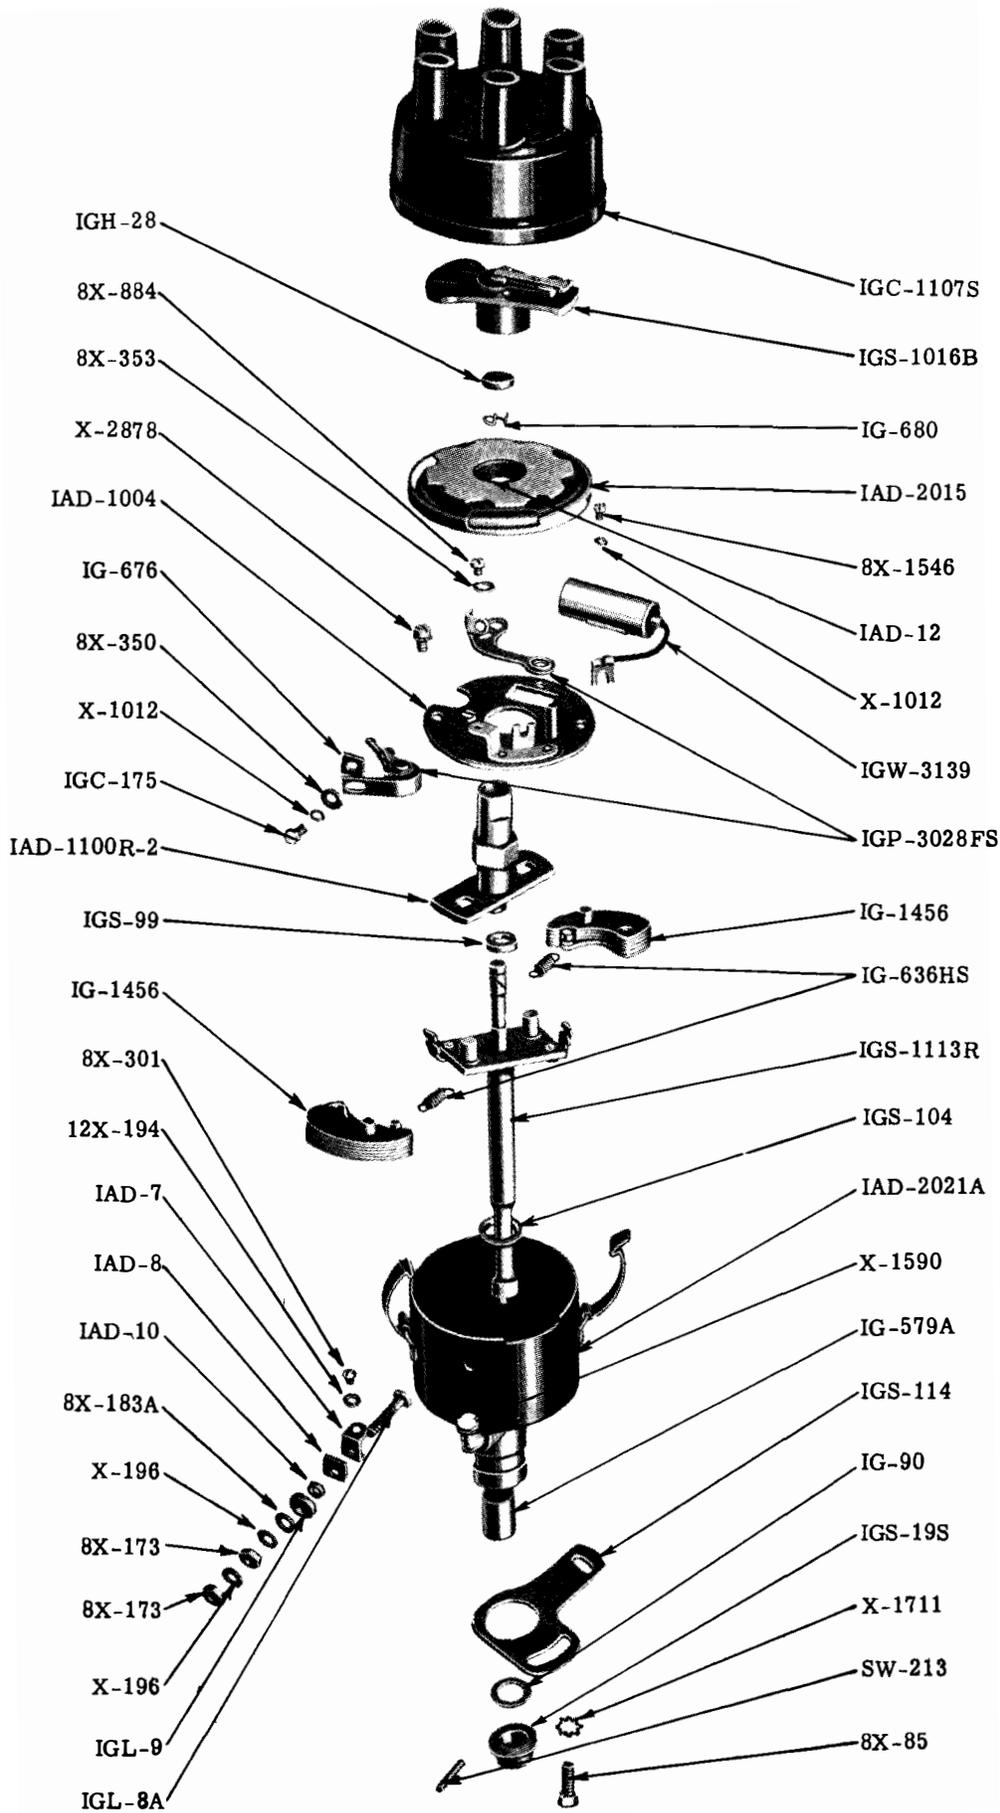

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD-4203,-1 DISTRIBUTOR PARTS LIST

IAD-4203,-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAD-1100RA-2	1	Cam & Stop Plate, 6 Cyl., R.H.	IG-90	1	Washer, Thrust, Drive Shaft, Lower
IAD-2004	1	Plate Assy., Breaker	IG-94	7	Terminal, H.T. Wire
IAD-1004	1	Plate, Breaker	IG-680	1	Snap Ring, Cam Retaining
IG-676	1	Clip, Spring, Contact Arm	IGC-1107S	1	Cap Assy., Dist.
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IG-514	1	Contact, Plunger
IGP-3028FS	1	Contact Set, Breaker	IG-515A	1	Spring, Contact
IGW-3139	1	Condenser	IGS-32	1	Plug, Vent. Hole, Rubber
8X-350	1	Washer, Plain, Contact Lock Sc., #8	IGH-28	1	Wick, Felt, Cam Sleeve
8X-353	1	Washer, Plain, Clamp Sc., #6	IGS-19S	1	Collar, Shaft
8X-884	1	Screw, Lock, Breaker	IGS-99	1	Spacer, Cam
X-1012	2	Contact, Fill Hd. #8-32x3/16	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
8X-1546	1	Lockwasher, Condenser & Clamp Sc., #6	*	1	Arm, Advance
IAD-2015	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	IGS-1016B	1	Rotor
IAD-12	1	Plate Assy., Seal	IGS-2112RA	1	Shaft & Gov. Assy.
IAD-2021	1	Washer, Felt	IG-636NS	1	Spring Set, Gov. Weight
IAD-7	1	Base Assy., Dist.	IG-1456	2	Weight, Governor
IAD-8	1	Connector, Term. Stud	IGS-1112R	1	Shaft, Drive
IAD-10	1	Insulation, Term. Stud, Inner	SW-213	1	Rivet, Collar, Drive Shaft
IG-579A	2	Bushing, Ins., Term. Stud	*	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IGL-8A	1	Bearing, Abs. Bronze	12X-194	1	Lockwasher, Connector Sc., #6
IGL-9	1	Stud, Terminal, #10-32x15/16	8X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
IGS-117	1	Washer, Ins., Term. Stud	*	1	Washer, Advance Arm, Skpf. 1/4
8X-173	1	Wick, Felt	X-2878	2	Screw, Breaker Plate Mtg., Fill Hd. #10-32x5/16
8X-183A	1	Nut, Term. Stud, Hex. #10-32			
12X-196	1	Washer, Plain, Term. Stud, #10			
X-1590	1	Washer, Lock, Term. Stud, #10			
		Oiler, Press in, 1/4			

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Arm, Advance	Screw	Washer
IAD-4203	None	None	None
IAD-4203-1	IGS-114	8X-86	12X-199

(Issued 7-13-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD-4204,A,B DISTRIBUTOR PARTS LIST

IAD-4204,A,B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
*	1	1 2 3 4 5 Cam & Stop Plate, 6 Cyl. L.H.	IG-90	1	1 2 3 4 5 Washer, Thrust, Drive Shaft, Lower
IAD-2004	1	Plate Assy., Breaker	IG-94	7	Terminal, H.T. Wire
IAD-1004	1	Plate, Breaker	IG-644	1	Coupling, Drive, Dist.
IG-676	1	Clip, Spring, Contact Arm	IG-680	1	Snap Ring, Cam Retaining
IGC-175	1	Screw, Spring, Clamp, Hex. Hd. #6-32x5/16	IG-816	1	Washer, Thrust, Advance Arm
IGP-3028FS	1	CONTACT SET, BREAKER	IG-2860A	1	Arm, Advance
IGW-3139	1	CONDENSER	IGC-1107S	1	CAP ASSY., DIST.
8X-350	1	Washer, Plain, Contact Lock Screw, #8	IG-514	1	Contact, Plunger
8X-353	1	Washer, Plain, Clamp Screw #6	IG-515A	1	Spring, Contact
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	IGS-32	1	Plug, Vent. Hole, Rubber
X-1012	2	Lockwasher, Condenser & Clamp Screw, #6	IGH-28	1	Wick, Felt, Cam Sleeve
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	IGS-99	1	Spacer, Cam
IAD-2015	1	Plate Assy., Seal	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IAD-12	1	Washer, Felt	IGS-1016B	1	ROTOR
IAD-2059	1	Base Assy., Dist.	*	1	Shaft Governor Assy.
IAD-7	1	Connector, Term. Stud	IG-2456	2	Weight, Governor
IAD-8	1	Insulation, Term. Stud, Inner	IGS-1053L	1	Shaft, Drive
IAD-10	1	Bushing, Ins., Term. Stud	*	1	Spring Set, Gov. Weight
IG-579A	2	Bearing, Abs. Bronze	*	1	Spring, Anti-Rattle
IGL-8A	1	Stud, Terminal, #10-32x15/16	SW-213	1	Rivet, Coupling, Drive Shaft
IGL-9	1	Washer, Ins., Term. Stud, Outer	12X-194	1	Lockwasher, Connector Sc., #6
8X-173	2	Washer, Plain, Term. Stud, #10	8X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
8X-183A	1	Washer, Term. Stud, #10	X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
12X-196	2	Lockwasher, Term. Stud, #10			1 2 3 4 5
X-490A	1	Oiler, Press in, 1/4			
		1 2 3 4 5			

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Cam & Stop Plate	Shaft & Gov. Assembly	Spring Set Gov. Weight	Spring Anti-Rattle
IAD-4204	IAD-1100LC	IGS-2053LX	IGB-327GS	IGT-69
IAD-4204A	IAD-1100LC	IGS-2053LY	IGB-327DS	IGT-69
IAD-4204B	IAD-1100LB	IGS-2053LZ	IGC-42CS	None

UNIT	APPLICATION
IAD-4204, A, B	Continental

(Issued 4-19-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD-4206 DISTRIBUTOR PARTS LIST

IAD-4206

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAD-1100LA-1	1	Cam & Stop Plate, 4 Cyl., L.H.	IG-680	1	Snap Ring, Cam Retaining
IAD-2004	1	Plate Assy., Breaker	IG-816	1	Washer, Thrust, Advance Arm
IAD-1004	1	Plate, Breaker	IG-1324E	1	CAP ASSY., DISTRIBUTOR
IG-676	1	Clip, Spring, Contact Arm	IG-514	1	Contact, Plunger
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IG-515A	1	Spring, Contact
IGP-3028FS	1	CONTACT SET, BREAKER	IG-1657R	1	ROTOR
IGW-3139	1	CONDENSER	IG-2456	2	Weight, Governor
X-194	2	Lockwasher, Condenser & Clamp Sc., #6	IG-2860A-3	1	Arm, Advance
8X-350	1	Washer, Plain, Contact Lock Sc., #8	IGE-29S	1	Spring Set, Gov. Weight
8X-353	1	Washer, Plain, Clamp Sc., #6	IGH-28	1	Wick, Felt, Cam Sleeve
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	IGS-99	1	Spacer, Cam
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IAD-2015	1	Plate Assy., Seal	IGS-1171LA	1	Shaft, Drive
IAD-12	1	Washer, Felt	IGT-69	1	Spring, Anti-Rattle
IAD-2042	1	Base Assy., Dist.	SW-213	1	Rivet, Coupling
IAD-7	1	Connector, Term. Stud	12X-194	1	Lockwasher, Connector Sc., #6
IAD-8	1	Insulation, Term. Stud, Inner	8X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
IAD-9	2	Bracket, Brkr. Plate Mtg.	X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IAD-10	1	Bushing, Ins., Term. Stud			
IAD-14	2	Bracket, Cap Spring			
IG-579A	2	Bearing, Abs. Bronze			
IGL-8A	1	Stud, Terminal, #10-32x15/16			
IGL-9	1	Washer, Ins., Term. Stud, Outer			
IGZ-9	2	Spring, Clamp Cap			
8X-173	2	Nut, Term. Stud, Hex. #10-32			
8X-183A	1	Washer, Term. Stud, Plain, #10			
12X-196	2	Lockwasher, Term. Stud, #10			
X-382	1	Cup, Grease			
X-525	4	Rivet, Tubular			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-94	5	Terminal, H.T. Wire			
IG-644	1	Coupling, Drive, Dist.			

UNIT	APPLICATION
IAD-4206	Continental

(Issued 10-11-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD-4207A DISTRIBUTOR PARTS LIST

IAD-4207A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-79	1	Gear, Follower	IGH-28	1	Wick, Felt, Cam Sleeve
IAD-1100RA-1	1	Cam, & Stop Plate, 4 Cyl. R.H.	IGS-99	1	Spacer Cam.
IAD-2001	1	Base Assy., Dist.	IGS-104	1	Washer, Thrust, Drive Shaft Upper
IAD-7	1	Connector, Term. Stud	IGS-2151RA	1	Shaft & Gov. Assy.
IAD-8	1	Insulation, Term. Stud Inner	IG-1456	2	Weight, Governor
IAD-10	1	Bushing, Term. Stud	ICB-284S	1	Spring Set, Gov. Weight
IG-579A	2	Bearing, Absorbent Bronze	IGS-1151RA	1	Shaft, Drive
IGL-8A	1	Stud, Terminal, #10-32x15/16	IGT-70	1	Spring, Anti-Rattle
IGL-9	1	Washer, Ins., Term. Stud	SW-213	1	Rivet, Gear
8X-173	2	Nut, Term. Stud, Hex. #10-32	12X-194	1	Lockwasher, Connector, Sc., #6
8X-183A	1	Washer, Plain, Term. Stud, #10	8X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
X-196	2	Lockwasher, Term. Stud, #10	X-2878	2	Screw, Breaker Plate, Mtg., Fill. Hd. #10-32x5/16
X-490A	1	Oiler, Press in, 1/4			
IAD-2004	1	Plate Assy., Breaker			
IAD-1004	1	Plate, Breaker			
IG-676	1	Clip, Spring, Contact Arm.			
IGC-175	1	Screw, Spring, Clamp, Hex. Hd. #6-32x5/16			
IGP-3028FS	1	Contact Set, Breaker			
IGW-3139	1	Condenser			
8X-350	1	Washer, Plain, Contact Lock Sc., #8			
8X-353	1	Washer, Plain, Clamp Sc., #6			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
X-1012	2	Lockwasher, Condenser & Clamp Sc., #6			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAD-2015	1	Plate Assy., Seal			
IAD-12	1	Washer, Felt			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-94	5	Terminal, H.T. Wire			
IG-680	1	Snap Ring, Cam Retaining			
IG-816	1	Washer, Thrust, Advance Arm			
IG-816A	1	Washer, Thrust, Advance Arm			
IG-1324D	1	Cap Assy., Dist.			
IG-514	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IG-1657R	1	Rotor			
IG-1860A	1	Arm, Advance			

UNIT	APPLICATION
IAD-4207A	Continental

(Issued 7-13-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAD-4302A DISTRIBUTOR PARTS LIST

IAD-4302A

Part No.	No. Used	Name of Part					
			1	2	3	4	5
GE-82	1	GEAR, FOLLOWER					
IAD-1100RG	1	Cam & Stop Plate 6 Cyl. R.H.					
IAD-2015	1	Plate Assy., Seal					
IAD-12	1	Washer, Felt					
IAD-2030	1	Plate Assy., Breaker					
IAD-32	1	Cover, Grease Retainer					
IAD-36	1	Packing					
IAD-1030	1	Plate, Breaker					
IAD-1035	1	Wick, & Spring Assy.					
IAD-3028S	1	CONTACT SET, BREAKER					
IG-676	1	Clip, Breaker Arm Spring					
IG-2671	1	CONDENSER					
IGC-175	1	Screw, Spring Clamp Hex. Hd., #7-32x5/16					
8X-350	1	Washer, Plain, Contact Lock Sc., #8					
8X-353	1	Washer, Plain, Clamp Sc., #6					
8X-884	1	Screw, Lock, Breaker Contact Fil. Hd. #8-32x3/16					
X-1012	2	Lockwasher, Condenser & Clamp Sc., #6					
8X-1546	1	Screw, Condenser Mtg., Fil. Hd., #6-32x5/32					
IAD-2040	1	Base Assy., Dist.					
IAD-7	1	Connector, Term. Stud					
IAD-8	1	Insulation, Term. Stud, Inner					
IAD-10	1	Bushing, Ins., Term. Stud					
IG-579A	2	Bearing, Absorbent Bronze					
IGL-8	1	Term., #10-32x15/16					
IGL-9	1	Washer, Ins., Term. Stud					
8X-173	2	Nut, Term. Stud, Hex., #10-32					
8X-183	1	Washer, Plain, Term. Stud, #10					
12X-196	2	Lockwasher, Term. Stud, #10					
X-382	1	Cup, Grease, 1/8					
			1	2	3	4	5

Part No.	No. Used	Name of Part					
			1	2	3	4	5
IG-90	1	Washer, Thrust, Drive Shaft, Lower					
IG-94	7	Terminal, H.T. Wire					
IG-680	1	Snap Ring, Cam Retaining					
IG-816	1	Washer, Thrust, Advance Arm					
IGC-1107S	1	CAP ASSY., DIST.					
IG-514	1	Contact, Plunger					
IG-515A	1	Spring, Contact					
IGS-32	1	Plug, Vent. Hole, Rubber					
IGC-2130RZ	1	Shaft & Gov. Assy.					
IGC-1130RD	1	Shaft, Drive					
IGC-2168R	2	Weight, Assembly					
IGB-350S	1	Spring, Set					
IGH-28	1	Wick, Felt, Cam Sleeve					
IGS-99	1	Spacer, Cam					
IGS-104	1	Washer, Thrust, Drive Shaft, Upper					
IGS-1016B	1	ROTOR					
IGS-2020-5	1	Arm, Advance					
IGT-70	1	Spring, Anti-Rattle					
SW-213	1	Rivet, Gear					
12X-194	1	Lockwasher, Connector Sc #6					
12X-196	1	Lockwasher, #10					
8X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16					
8X-872	1	Screw, Fil. Hd., #10-32x 1/4					
X-2878	2	Screw, Breaker Plate Mtg., Fil. Hd. #10-32x5/16					
			1	2	3	4	5

UNIT	APPLICATION
IAD-4302A	Autocar

(Issued 8-14-47)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS


IAD-6000 SERIES DISTRIBUTOR PARTS LIST

IAD-6000 Series
(Issued 4-5-56)


Model No.	No. Cyl.	CUSTOMER
IAD-6001-1A	6	Ward LaFrance
IAD-6001-1B	6	Buda, Cockshutt Plow
IAD-6001-1C	6	Federal, Ward LaFrance, Biederman, Diamond T, White
IAD-6001-2A	6	Hercules, Speed Sprayer
IAD-6001-2B	6	Biederman, Diamond T
IAD-6001-2D	6	Continental
IAD-6001-2F	6	Continental, Diamond T
IAD-6001-2J	6	Ross Carrier
IAD-6001-2L	6	Diamond T
IAD-6001-2N	6	Maxim Motors
IAD-6001-2R	6	Continental
IAD-6001C	6	Bay City Shovel
IAD-6001D	6	Hercules, Ross Carrier
IAD-6001E	6	Hercules, Massey Harris (Canada)
IAD-6001F	6	Hercules
IAD-6002-1A	6	Continental
IAD-6002-1B	6	Buda, Massey Harris
IAD-6002-1C	6	Worthington Pump
IAD-6002-1D	6	Ward LaFrance
IAD-6002-1E	6	Continental
IAD-6002-1F	6	Continental
IAD-6002-1G	6	Continental
IAD-6002-1K	6	Continental
IAD-6003-1A	4	Cockshutt Plow
IAD-6003-1B	4	J. I. Case
IAD-6003-2A	4	Detroit Tractor, Massey Harris
IAD-6003-2B	4	J. I. Case, Hercules
IAD-6003-2F	4	J. I. Case
IAD-6003-2G	4	Massey Harris (Canada)
IAD-6003-2H	4	Continental
IAD-6003-2J	4	J. I. Case
IAD-6003B	4	Cockshutt Plow, Hercules
IAD-6003D	4	Hercules
IAD-6004-1B	4	Continental
IAD-6004-1C	4	Continental, Federal Machine
IAD-6004-1D	4	Continental, Worthington Pump
IAD-6004-1E	4	Massey Harris
IAD-6004-1G	4	Lycoming
IAD-6004-2C	4	Ross Carrier
IAD-6004-2D	4	Continental, Massey Harris
IAD-6004-2E	4	Massey Harris
IAD-6004-2F	4	Wisconsin
IAD-6004-2H	4	Massey Harris
IAD-6006-1	6	Continental
IAD-6009-2A	6	Continental, Diamond T

File in
Equipment & Parts List Binder

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS				
Name	Part No.	No. Used	Used on	
 BEARING, Ball, S. A. E. #202, Tach. Drive	X-294	1	IAD-6009-2A	
 BRACKETS (A) Breaker Plate Mtg. (B) Cap Spring	IAD-9	2	All	
	IAD-14	2	All	
 BUSHING INSULATING, Terminal Stud	IAD-10	1	All	
 CLIP, Contact Arm Spring	IG-676	1	All	
 CONNECTOR, Terminal Stud	IAD-7	1	All	
 CONTACT, Dist. Cap Plunger	IG-514	1	All	
 COVER, Tachometer Shaft Housing	IGS-38	1	IAD-6009-2A	
 CUP, Grease	X-382	1	IAD-6009-2A	
 GASKET, Dist. Cap Cover	IGB-230	3	IAD-6006-1	
 GEARS (A) Tachometer Drive (B) Tachometer Follower	GE-47	1	IAD-6009-2A	
	GE-48	1	IAD-6009-2A	
 INSULATION, Terminal Stud (Inner)	IAD-8	1	All	
 LOCKWASHERS (A) Condenser & Clamp Sc. #6 (A) Connector Screw #6 (B) Terminal Stud #10	12X-194	2	All	
	12X-194	1	All	
	12X-196	2	All	
 NUT, Terminal Stud, Hex. #10-32	8X-173	2	All	
 OILER, Dist. Base	X-490A	1	IAD-6001-1A, 1B, 1C, 2A, 2B, 2D, 2F, 2J, 2L, 2N, 2R, C, D, E, F, IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1G, 1K, IAD-6003-1A, 1B, 2A, 2B, 2F, 2G, 2H, 2J, B, D, IAD-6004-1B, 1C, 1D, 1E, 2C, 2D, 2E, 1G, 2F, 2H, IAD-6006-1	
 PLATE, Breaker	IAD-1004	1	All	
 PLATE ASSY., Seal	IAD-2015	1	All	
 PLUG, Rubber, Dist. Cap	IGS-32	1	All	
 RIVETS (A) Gear or Coupling (A) Gear, Tachometer (A) Gear or Collar (B) Tubular, Cap Spring Bracket Mtg.	SW-213	1	IAD-6001-1A, 1B, 1C, 2D, 2F, 2N, 2R, IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1G, 1K, IAD-6003-1A, 1B, 2A, 2B, 2F, 2G, 2H, 2J, IAD-6004-1B, 1C, 1D, 1E, 1G, 2C, 2D, 2E, 2F, 2H, IAD-6006-1, IAD-6009-2A	
	SW-213	1	IAD-6009-2A	
	GJ-236	1	IAD-6001-2A, 2B, 2J, 2L	
	X-525	4	All	
 SCREWS (A) Breaker Contact Lock, Fill. Hd. #8-32x3/16 (A) Breaker Plate Mtg., Fill. Hd. #10-32x5/16 (B) Clamp Spring, Hex. Hd. #6-32x5/16 (A) Condenser Mtg., Fill. Hd. #6-32x5/32 (C) Connector, Rd. Hd. #6-32x3/16 (D) Dist. Cap Cover, Ctsk. Hd. #8-32x3/4	8X-864	1	All	
	X-2878	2	All	
	IGC-175	1	All	
	8X-1546	1	All	
	8X-301	1	All	
8X-1340	3	IAD-6006-1		
 SHAFT, Drive, Tachometer	IGS-148	1	IAD-6009-2A	
 SNAP RING, Cam Retaining	IG-680	1	All	
 SPACER, Cam	IGS-99	1	All	

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS


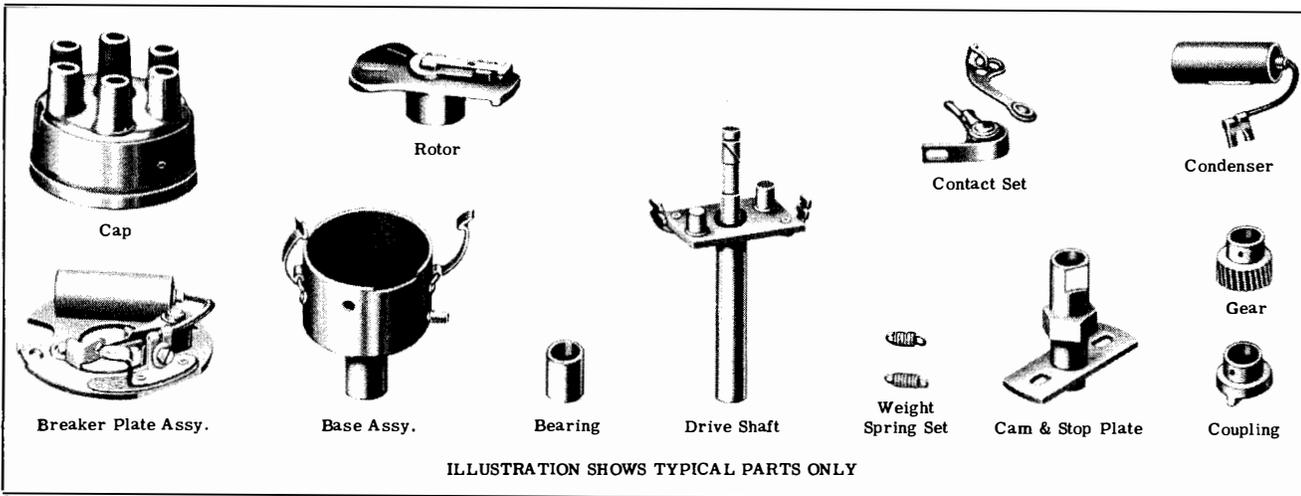


Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IAD-6001-1A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053RE	IGB-284ES	IAD-1100RL	IG-644A
IAD-6001-1B	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-353AS	IAD-1100RJ	IG-644A
IAD-6001-1C	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053RE	IGB-208S	IAD-1100RG	IG-644A
IAD-6001-2A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGE-24S	IAD-1100RE	GE-41S
IAD-6001-2B	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGC-213S	IAD-1100RN	GE-41S
IAD-6001-2D	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-327KS	IAD-1100RJ	GE-83
IAD-6001-2F	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-284ES	IAD-1100RL	GE-83
IAD-6001-2J	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGE-29S	IAD-1100RR	GE-56
IAD-6001-2L	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGC-213S	IAD-1100RN	GE-56
IAD-6001-2N	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGE-24S	IAD-1100RE	GE-104
IAD-6001-2R	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-336AS	IAD-1100RL	GE-83
IAD-6001C	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGC-207S	IAD-1100RC	---
IAD-6001D	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGE-24S	IAD-1100RE	---
IAD-6001E	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGC-213S	IAD-1100RN	---
IAD-6001F	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IG-636SS	IAD-1100RC	---
IAD-6002-1A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IG-796BS	IAD-1100LG	IG-644A
IAD-6002-1B	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-327HS	IAD-1100LF	IG-644A
IAD-6002-1C	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-327JS	IAD-1100LF	IG-644A
IAD-6002-1D	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-317FS	IAD-1100LF	IG-644A
IAD-6002-1E	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-327FS	IAD-1100LC	IG-644A
IAD-6002-1F	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-339AS	IAD-1100LC	IG-644A
IAD-6002-1G	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-327FS	IAD-1100LH	IG-644A
IAD-6002-1K	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LC	IG-636US	IAD-1100LK	IG-644A
IAD-6003-1A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-284ES	IAD-1100RH-1	IG-644A
IAD-6003-1B	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IG-636S	IAD-1100RK-1	IG-644A
IAD-6003-2A	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGE-24S	IAD-1100RA-1	GE-95
IAD-6003-2B	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGC-118BS	IAD-1100RK-1	GE-95A
IAD-6003-2F	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGC-118BS	IAD-1100RK-1	GE-98
IAD-6003-2G	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGE-24S	IAD-1100RA-1	GE-101
IAD-6003-2H	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IG-775S	IAD-1100RC-1	GE-102
IAD-6003-2J	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-252S	IAD-1100RK-1	GE-98
IAD-6003B	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGB-358AS	IAD-1100RG-1	---
IAD-6003D	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180R	IGC-118BS	IAD-1100RG-1	---
IAD-6004-1B	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-327FS	IAD-1100LD-1	IG-644A
IAD-6004-1C	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGC-42LS	IAD-1100LF-1	IG-644A
IAD-6004-1D	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGE-28S	IAD-1100LA-1	IG-644A
IAD-6004-1E	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IG-727AS	IAD-1100LG-1	IG-644A
IAD-6004-1G	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180L	IGB-252S	IAD-1100LM-1	IG-644A
IAD-6004-2C	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180L	IGE-28S	IAD-1100LA-1	GE-100
IAD-6004-2D	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180L	IG-636WS	IAD-1100LE-1	GE-101
IAD-6004-2E	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180L	IGB-327ES	IAD-1100LA-1	GE-101
IAD-6004-2F	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180L	IGC-200S	IAD-1100LE-1	GE-89
IAD-6004-2H	IG-1324D	IG-1657R	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1180L	IGC-199S	IAD-1100LG-1	GE-101
IAD-6006-1	IGC-1123L	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2020	IG-579A	IGS-1053LE	IGB-327FS	IAD-1100LL	IG-644A
IAD-6009-2A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IAD-2004	IAD-2060	*IG-579A	IGS-1174R	IGB-284ES	IAD-1100RL	†GE-83

* See Miscellaneous Parts Section for other Bearings.
 † See Miscellaneous Parts Section for other Drive Gears.
 ‡ IGC-1124L Distributor Cap Cover.

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Continued)

	Name	Part No.	No. Used	Used on
	SPRINGS			
	(C) Anti-Rattle	IGT-69	1	IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1G, IAD-6004-1B, 1D, 1E, 2C, 2D, 2E, 2F, 2H, IAD-6006-1
	(C) Anti-Rattle	IGT-70	1	IAD-6001-1A, 1B, 1C, 2A, 2B, 2D, 2F, 2L, 2N, 2R, C, D, E, F, IAD-6003-1A, 1B, 2B, 2F, 2H, 2J, B, D, IAD-6009-2A
	(B) Cap Clamp (A) Contact, Dist. Cap	IGZ-9 IG-515A	2 1	All All
	STUD, Terminal	IGL-8A	1	All
	WASHERS			
	(A) Felt, Seal Plate	IAD-12	1	All
	(B) Insulating, Terminal Stud	IGL-9	1	All
	(C) Clamp Sc. (Plain) #6	8X-353	1	All
	(C) Contact Lock Sc. (Plain) #8	8X-350	1	All
	(C) Terminal Stud (Plain) #10	8X-183A	1	All
	(D) Thrust, Inner, Drive Shaft (Upper)	IAO-10	1	IAD-6001-1A, 1B, 1C, 2A, 2B, 2D, 2F, 2J, 2L, 2N, 2R, C, D, E, F, IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1G, 1K, IAD-6003-1A, 1B, 2A, 2B, 2F, 2G, 2H, 2J, B, D, IAD-6004-1B, 1C, 1D, 1E, 1G, 2C, 2D, 2E, 2F, 2H, IAD-6006-1
	(D) Thrust Outer, Drive Shaft (Upper)	IAO-11	1	IAD-6001-1A, 1B, 1C, 2A, 2B, 2D, 2F, 2J, 2L, 2N, 2R, C, D, E, F, IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1G, 1K IAD-6003-1A, 1B, 2A, 2B, 2F, 2G, 2H, 2J, B, D IAD-6004-1B, 1C, 1D, 1E, 1G, 2C, 2D, 2E, 2F, 2H, IAD-6006-1
	(E) Thrust, Drive Shaft (Lower)	IG-90	1	IAD-6001-1A, 1B, 1C, 2A, 2B, 2D, 2F, 2J, 2L, 2N, 2R, C, D, E, F, IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1G, 1K IAD-6003-1A, 1B, 2A, 2G, B, D, IAD-6004-1B, 1C, 1E, 1G, 2C, 2D, 2E, 2F, 2H, IAD-6006-1
	(E) Thrust, Drive Shaft	IG-90	2	IAD-6009-2A
(F) Thrust, Tachometer Shaft	IGS-39	1	IAD-6009-2A	
(G) Thrust, Drive Shaft (Lower)	IGZ-90	1	IAD-6003-2B, IAD-6003-2F, 2J	
	WEIGHTS			
	Governor	IGC-2168L	2	IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1K IAD-6004-1B, 1C, 1D, 1E, 1G, 2C, 2E, 2F, 2H, IAD-6006-1
	Governor	IGC-2168R	2	IAD-6001-1A, 1B, 1C, 2A, 2B, 2D, 2F, 2J, 2L, 2N, 2R, C, D, E, F, IAD-6003-1A, 1B, 2A, 2B, 2F, 2G, 2H, 2J, B, D, IAD-6009-2A
	WICKS			
	(A) Felt, Cam Sleeve	IGH-28	1	All
	(B) Felt, Oiler	IGS-117	1	IAD-6001-1A, 1B, 1C, 2A, 2B, 2D, 2F, 2J, 2L, 2N, 2R, C, D, E, F, IAD-6002-1A, 1B, 1C, 1D, 1E, 1F, 1G, 1K, IAD-6003-1A, 1B, 2A, 2B, 2F, 2G, 2H, 2J, B, D, IAD-6004-1B, 1C, 1D, 1E, 1G, 2C, 2D, 2E, 2F, 2H, IAD-6006-1

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAK-4001-1M DISTRIBUTOR PARTS LIST

IAK-4001-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GE-47	1	Gear, Tachometer, Driver	IGH-28	1	Wick, Felt, Cam Sleeve
GE-48	1	Gear, Tachometer, Follower	IGH-30	1	Cover, Cap, Dist.
IAK-40	1	Cap, Tachometer Shaft	IGH-36	1	Nut, Cover, Dist. Cap, #10-32
IAK-1016	1	Rotor	IGH-1087	1	Cap Assy., Dist.
IAK-2021R-1	1	Cam, & Stop Plate, 8 Cyl., R.H.	IG-514	1	Contact, Plunger
IAK-2001	1	Base Assy., Dist.	IG-515A	1	Spring, Contact
IAD-8	1	Insulation, Term. Stud, Inner	IGS-21	1	Pointer, Advance Arm
IAD-10A	1	Bushing, Ins., Term. Stud	IGS-38	1	Cover, Housing, Tach. Shaft
IAK-7	1	Connector, Term. Stud	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IAK-8	1	Elbow, Grease Cup	IGS-99	1	Spacer, Cam
IG-579A	2	Bearing, Absorbent Bronze	IGS-148	1	Shaft, Drive, Tachometer
IGL-8B	1	Stud, Terminal	IGS-1020-2	1	Arm, Advance
IGL-9	1	Washer, Ins., Term. Stud	IGT-70	1	Spring, Anti-Rattle
X-183B	1	Washer, Plain, Term. Stud, #10	IGT-2025RE	1	Shaft & Gov. Assy.
12X-196	2	Lockwasher, Term. Stud, #10	IG-1456	2	Weight, Governor
X-382A	1	Cup, Grease, 1/8"	IGB-292SS	1	Spring, Set, Gov. Weight
X-2853	2	Nut, Term. Stud, Hex. #10-32	IGT-1025RC	1	Shaft, Drive
IAK-2004	1	Plate Assy., Breaker	SW-213	2	Rivet, Gear, & Collar
IAK-1004	1	Plate, Breaker	X-183B	1	Washer, Plain, Cover Sc., #10
IG-676	1	Clip, Spring, Contact Arm	12X-194	1	Lockwasher, Connector Sc., #6
IG-3927E	1	Condenser	12X-196	1	Lockwasher, Cover Screw #10
IGC-175	1	Screw, Spring Clamp, Hex. Hd. 6-32x5/16	X-294	1	Bearing, Ball, S.A.E. #202
IGP-3028WS	1	Contact Set, Breaker	8X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
19X-59	1	Screw, Lock, Breaker Contact, Rd. Hd. #8-32x3/16	X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-350	1	Washer, Plain, Contact Lock Sc., #8			1 2 3 4 5
19X-353	1	Washer, Plain, Clamp Sc., #6			
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-680	1	Snap Ring, Cam Retaining			
IG-816C	1	Washer, Thrust, Advance Arm			
IGB-199	1	Collar, Shaft, Dist.			
		1 2 3 4 5			

UNIT	APPLICATION
IAK-4001-1M	Chrysler Marine

(Issued 1-27-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAK-4002-1M DISTRIBUTOR PARTS LIST

IAK-4002-1M

Part No.	No. Used	Name of Part				
		1	2	3	4	5
GE-47	1	Gear, Tachometer, Driver				
GE-48	1	Gear, Tachometer, Follower				
IAK-40	1	Cap, Tachometer Shaft				
IAK-1016	1	Rotor				
IAK-1021R-1	1	Cam & Stop Plate, 8 Cyl., R.H.				
IAK-2001	1	Base Assy., Dist.				
IAD-8	1	Insulation, Term.Stud, Inner				
IAD-10A	1	Bushing, Ins., Term. Stud				
IAK-7	1	Connector, Term. Stud				
IAK-8	1	Elbow, Grease Cup				
IG-579A	2	Bearing, Abs. Bronze				
IGL-8B	1	Stud, Terminal				
IGL-9	1	Washer, Ins., Term. Stud				
X-183B	1	Washer, Plain, Term. Stud, #10				
12X-196	2	Lockwasher, Term. Stud, #10				
X-382A	1	Cup, Grease 1/8"				
X-2853	2	Nut, Term. Stud, Hex. #10-32				
IAK-2004	1	Plate Assy., Breaker				
IAK-1004	1	Plate, Breaker				
IG-676	1	Clip, Spring, Contact Arm				
IG-3927E	1	Condenser				
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16				
IGP-3028WS	1	Contact Set, Breaker				
19X-59	1	Screw, Lock, Breaker				
19X-350	1	Contact Rd. Hd. #8-32x3/16				
19X-350	1	Washer, Plain, Contact Lock Screw, #8				
19X-353	1	Washer, Plain, Clamp Sc., #6				
12X-1012	2	Lockwasher, Condenser & Clamp Screw, #6				
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32				
IG-90	2	Washer, Thrust, Drive Shaft				
IG-680	1	Snap Ring, Cam Retaining				
IG-816C	1	Washer, Thrust, Advance Arm				
IGB-199	1	Collar, Shaft, Dist.				
IGH-28	1	Wick, Felt, Cam Sleeve				
IGH-30	1	Cover, Cap, Dist.				
IGH-36	1	Nut, Cover, Dist. Cap, #10-32				
IGH-1029B	1	Cap Assy., Dist.				
IG-514	1	Contact, Plunger				
IG-515A	1	Spring, Contact				
IGS-21	1	Pointer, Advance Arm				
IGS-38	1	Cover, Housing, Tach. Shaft				
IGS-39	1	Washer, Thrust, Tach. Drive Shaft				
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGS-99	1	Spacer, Cam				
IGS-148	1	Shaft, Drive, Tachometer				
IGS-1020-2	1	Arm, Advance				
IGT-70	1	Spring, Anti-Rattle				
IGT-2025RE	1	Shaft & Gov. Assy.				
IG-1456	2	Weight, Governor				
IGB-292SS	1	Spring, Set, Gov. Weight				
IGT-1025RC	1	Shaft, Drive				
SW-213	2	Rivet, Gear & Collar				
X-183B	1	Washer, Plain, Cover Sc., #10				
12X-194	1	Lockwasher, Connector Screw, #6				
12X-196	1	Lockwasher, Cover Screw, #10				
X-294	1	Bearing, Ball, S.A.E. #202				
8X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16				
X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16				
		1	2	3	4	5

UNIT	APPLICATION
IAK-4002-1M	Chrysler Marine

(Issued 1-27-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAK-4101M DISTRIBUTOR PARTS LIST

IAK-4101M

Part No.	No. Used	Name of Part					
			1	2	3	4	5
GE-47	1	GEAR, Tachometer, Driver					
GE-48	1	GEAR, Tachometer, Follower					
IAK-40	1	Cap, Tachometer Shaft					
IAK-1100L-1	1	Cam & Stop Plate, 8 Cyl. L.H.					
IAK-2004	1	Plate Assy., Breaker					
IAK-1004	1	Plate, Breaker					
IG-676	1	Clip, Spring, Contact Arm					
IG-3927E	1	CONDENSER					
IGC-175	1	Screw, Spring Clamp, Hex. Hd., #6-32x5/16					
IGP-3028WS	1	Contact Set, Breaker					
19X-59	1	Screw, Lock, Breaker Contact, Rd. Hd., #8-32x3/16					
19X-350	1	Washer, Plain, Contact Lock Sc., #8					
19X-353	1	Washer, Plain, Clamp Sc. #6					
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6					
19X-1546	1	Screw, Condenser Mtg., Fil. Hd., #6-32x5/32					
IAK-2017	1	Base Assy., Dist.					
IAD-8	1	Insulation, Term. Stud, Inner					
IAD-10A	1	Bushing, Ins., Term. Stud					
IAK-7	1	Connector, Term. Stud					
IG-579A	2	Bearing, Abs. Bronze					
IGL-8B	1	Stud, Terminal					
IGL-9	1	Washer, Ins., Term. Stud					
X-183B	1	Washer, Plain, Term. Stud #10					
12X-196	2	Lockwasher, Term. Stud, #10					
X-382A	1	Cup, Grease 1/8"					
X-2853	2	Nut, Term. Stud, Hex. #10-32					
IG-90	2	Washer, Thrust, Drive Shaft					
IG-94	9	Terminal, H.T. Wire					
IG-680	1	Snap Ring, Cam Retaining					
IG-2456	2	Weight, Governor					
IGB-284DS	1	Spring Set, Gov. Weight					

Part No.	No. Used	Name of Part					
			1	2	3	4	5
IGH-28	1	Wick, Felt, Cam Sleeve					
IGH-53B	1	Extension, Drive Shaft					
IGH-54	1	Sleeve, Drive Shaft					
IGH-55	1	Pin, Drive Shaft					
IGP-1003	1	CAP ASSY., DIST.					
IG-514	1	Contact, Plunger					
IG-515A	1	Spring, Contact					
IGP-1016B	1	ROTOR					
IGS-38	1	Cover, Housing, Tach. Shaft					
IGS-39	1	Washer, Thrust, Tach. Drive Shaft					
IGS-99	1	Spacer, Cam					
IGS-148	1	Shaft, Drive, Tachometer					
IGS-1177LA	1	Shaft, Drive					
IGT-69	1	Spring, Anti-Rattle					
SW-213	2	Rivet, Gear & Collar					
12X-194	1	Lockwasher, Connector Sc., #6					
X-294	1	Bearing, Ball, S.A.E. #202					
19X-301	1	Screw, Connector, Rd. Hd., #6-32x3/16					
X-2878	2	Screw, Breaker Plate Mtg., Fil. Hd., #10-32x5/16					
			1	2	3	4	5

UNIT	APPLICATION
IAK-4101M	Packard (Marine)

(Issued 10-22-47)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAL-4001-1M DISTRIBUTOR PARTS LIST

IAL-4001-1M

Part No.	No. Used	Name of Part	1	2	3	4	5	Part No.	No. Used	Name of Part	1	2	3	4	5
GE-47	1	Gear, Tachometer, Driver						IGC-1123C	1	Cap Assy., Dist.					
GE-48	1	Gear, Tachometer, Follower						IG-514	1	Contact, Plunger					
IAD-1100RD-2	1	Cam, & Stop Plate, 6 Cyl. R.H.						IG-515A	1	Spring, Contact					
IAD-2004B	1	Plate Assy., Breaker						IGC-1124B	1	Cover Assy., Dist. Cap					
IAD-1004A	1	Plate, Breaker						IGB-230	3	Gasket					
IG-676	1	Clip, Spring, Contact Arm						IGH-28	1	Wick, Felt, Cam Sleeve					
IG-3927J	1	Condenser						IGS-19S	1	Collar, Shaft					
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16						IGS-21	1	Pointer, Advance Arm					
IGP-3028VS	1	Contact Set, Breaker						IGS-38	1	Cover, Housing Tach. Shaft					
19X-350	1	Washer, Plain, Contact Lock Sc., #8						IGS-39	1	Washer, Thrust, Tach. Drive Shaft					
19X-353	1	Washer, Plain, Clamp Sc., #6						IGS-99	1	Spacer, Cam					
19X-884	1	Screw, Lock, Breaker Contact						IGS-148	1	Shaft, Drive, Tachometer Rotor					
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6						IGS-1016B	1	Arm, Advance					
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32						IGS-1020-2	1	Shaft & Gov. Assy.					
IAK-40	1	Cap, Tachometer Shaft						IGS-2165R	1	Weight, Governor					
IAL-2001	1	Base Assy., Dist.						IG-1456	2	Spring Set, Gov. Weight					
IAD-7A	1	Connector, Term. Stud						IGB-292SS	1	Shaft, Drive					
IAD-8	1	Insulator, Term. Stud, Inner						IGS-1165R	1	Rivet, Gear & Collar					
IAD-10A	1	Bushing, Ins., Term. Stud						SW-213	2	Lockwasher, Connector Sc., #6					
IG-579A	2	Bearing Absorbent Bronze						12X-194	1	Bearing, Ball, S.A.E. #202					
IGL-8B	1	Stud, Terminal						X-294	1	Screw, Connector, Rd. Hd. #6-32x3/16					
IGL-9	1	Washer, Ins., Term. Stud						19X-301	1	Screw, Breaker Plate Mtg., Fill Hd. #10-32x5/16					
X-183B	1	Washer, Plain, Term. Stud, #10						X-2878	2	Screw, Cover Ctsk. Hd. #8-32x3/4					
12X-196	1	Lockwasher, Term. Stud, #10						X-2932	3	1 2 3 4 5					
X-382A	1	Cup, Grease, 1/8"													
X-2853	1	Nut, Term. Stud, Hex. #10-32													
IG-90	2	Washer, Thrust, Drive Shaft													
IG-680	1	Snap Ring, Cam Retaining													
IG-816C	1	Washer, Thrust, Advance Arm													

UNIT	APPLICATION
IAL-4001-1M	Chrysler Marine

(Issued 1-27-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAL-4002-1M DISTRIBUTOR PARTS LIST

IAL-4002-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GE-47	1	Gear, Tachometer, Driver	IGC-1123A	1	Cap Assy., Dist.
GE-48	1	Gear, Tachometer, Follower	IG-514	1	Contact, Plunger
IAD-1100RD-2	1	Cam, & Stop Plate, 6 Cyl. R.H.	IG-515A	1	Spring, Contact
IAD-2004B	1	Plate Assy., Breaker	IGC-1124A	1	Cover Assy., Dist. Cap
IAD-1004A	1	Plate, Breaker	IGB-230	3	Gasket
IG-676	1	Clip, Spring, Contact Arm	IGH-28	1	Wick, Felt, Cam Sleeve
IG-3927J	1	Condenser	IGS-19S	1	Collar, Shaft
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-21	1	Pointer, Advance Arm
IGP-3028VS	1	Contact Set, Breaker	IGS-38	1	Cover, Housing, Tach. Shaft
19X-350	1	Washer, Plain, Contact Lock Sc., #8	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
19X-353	1	Washer, Plain, Clamp Sc., #6	IGS-99	1	Spacer, Cam
19X-884	1	Screw, Lock Breaker	IGS-148	1	Shaft, Drive, Tachometer Rotor
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6	IGS-1016B	1	Rotor
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	IGS-1020-2	1	Arm, Advance
IAK-40	1	Cap, Tachometer Shaft	IGS-2165R	1	Shaft & Gov. Assy.
IAL-2001	1	Base Assy., Dist.	IG-1456	2	Weight, Governor
IAD-7A	1	Connector, Term. Stud	IGB-292SS	1	Spring Set, Gov. Weight
IAD-8	1	Insulator, Term. Stud, Inner	IGS-1165R	1	Shaft, Drive
IAD-10A	1	Bushing, Ins., Term. Stud	SW-213	2	Rivet, Gear & Collar
IG-579A	2	Bearing, Absorbent Bronze	12X-194	1	Lockwasher, Connector Sc., #6
IGL-8B	1	Stud, Terminal	X-294	1	Bearing, Ball, S.A.E. #202
IGL-9	1	Washer, Ins., Term. Stud	19X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
X-183B	1	Washer, Plain, Term. Stud, #10	X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
12X-196	1	Lockwasher, Term. Stud, #10	X-2932	3	Screw, Cover Ctsk. Hd. #8-32x3/4
X-382A	1	Cup, Grease, 1/8"			1 2 3 4 5
X-2853	1	Nut, Term. Stud, Hex. #10-32			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-680	1	Snap Ring, Cam Retaining			
IG-816C	1	Washer, Thrust, Advance Arm			

UNIT	APPLICATION
IAL-4002-1M	Chrysler Marine

(Issued 1-27-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAL-4003-1M DISTRIBUTOR PARTS LIST

IAL-4003-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	Gear, Tachometer, Driver	IGH-28	1	Wick, Felt, Cam Sleeve
GE-48	1	Gear, Tachometer, Follower	IGS-19S	1	Collar, Shaft
IAD-1100RC-2	1	Cam, & Stop Plate 6 Cyl. R.H.	IGS-21	1	Pointer, Advance Arm
IAD-2004B	1	Plate Assy., Breaker	IGS-38	1	Cover, Housing, Tach. Shaft
IAD-1004A	1	Plate, Breaker	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IG-676	1	Clip, Spring, Contact Arm	IGS-99	1	Spacer, Cam
IG-3927J	1	Condenser	IGS-148	1	Shaft, Drive, Tachometer
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-1016B	1	Rotor
IGP-3028VS	1	Contact Set, Breaker	IGS-1020-2	1	Arm, Advance
19X-350	1	Washer, Plain, Contact Lock Sc., #8	IGS-2166R	1	Shaft & Gov. Assy.
19X-353	1	Washer, Plain, Clamp Sc., #6	IG-636NS	1	Spring Set, Gov. Weight
19X-884	1	Screw, Lock, Breaker	IG-1456	2	Weight, Governor
		Contact, Fill. Hd. #8-32x3/16	IGS-1166R	1	Shaft, Drive
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6	SW-213	2	Rivet, & Gear & Collar
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	12X-194	1	Lockwasher, Connector Sc., #6
IAK-40	1	Cap, Tachometer Shaft	X-294	1	Bearing, Ball, S.A.E. #202
IAL-2001	1	Base Assy., Dist.	19X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
IAD-7A	1	Connector, Term. Stud	X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IAD-8	1	Insulator, Term. Stud, Inner	X-2932	3	Screw, Cover Ctsk. Hd. #8-32x3/4
IAD-10A	1	Bushing, Ins., Term. Stud			1 2 3 4 5
IG-579A	2	Bearing, Absorbent Bronze			
IGL-8B	1	Stud, Terminal			
IGL-9	1	Washer, Ins., Term. Stud			
X-183B	1	Washer, Plain, Term. Stud #10			
12X-196	1	Lockwasher, Term. Stud, #10			
X-382A	1	Cup, Grease, 1/8"			
X-2853	1	Nut, Term. Stud, Hex. #10-32			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-680	1	Snap Ring, Cam Retaining			
IG-816C	1	Washer, Thrust, Advance Arm			
IGC-1123A	1	Cap Assy., Dist.			
IG-514	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGC-1124A	1	Cover Assy., Dist. Cap			
IGB-230	3	Gasket			
		1 2 3 4 5			

UNIT	APPLICATION
IAL-4003-1M	Chrysler Marine

(Issued 1-27-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAL-4004-1M DISTRIBUTOR PARTS LIST

IAL-4004-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GE-47	1	Gear, Tachometer, Driver	IGS-148	1	Shaft, Drive, Tachometer
GE-48	1	Gear, Tachometer, Follower	IGS-1016B	1	Rotor
IAD-1100RC-2	1	Cam & Stop Plate, 6 Cyl., R.H.	IGS-1020-2	1	Arm, Advance
IAD-2004B	1	Plate Assy., Breaker	IGS-2166R	1	Shaft & Gov. Assy.
IAD-1004A	1	Plate, Breaker	IG-636NS	1	Spring Set, Gov. Weight
IG-676	1	Clip, Spring, Contact Arm	IG-1456	2	Weight, Governor
IG-3927J	1	Condenser	IGS-1166R	1	Shaft, Drive
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	SW-213	2	Rivet, Gear & Collar
IGP-3028VS	1	Contact Set, Breaker	12X-194	1	Lockwasher, Connector Screw, #6
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-294	1	Bearing, Ball, S.A.E. #202
19X-353	1	Washer, Plain, Clamp Sc., #6	19X-301	1	Screw, Connector, Rd. Hd. #6-32x3/16
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	X-2878	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
12X-1012	2	Lockwasher, Condenser & Clamp Screw, #6	X-2932	3	Screw, Cover, Ctsk. Hd. #8-32x3/4
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			1 2 3 4 5
IAK-40	1	Cap, Tachometer Shaft			
IAL-2001	1	Base Assy., Dist.			
IAD-7A	1	Connector, Term. Stud			
IAD-8	1	Insulator, Term. Stud, Inner			
IAD-10A	1	Bushing, Ins., Term. Stud			
IG-579A	2	Bearing Abs. Bronze			
IGL-8B	1	Stud, Terminal			
IGL-9	1	Washer, Ins., Term. Stud			
X-183B	1	Washer, Plain, Term. Stud, #10			
12X-196	1	Lockwasher, Term. Stud, #10			
X-382A	1	Cup, Grease, 1/8"			
X-2853	1	Nut, Term. Stud, Hex. #10-32			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-680	1	Snap Ring, Cam Retaining			
IG-816C	1	Washer, Thrust, Advance Arm			
IGC-1123C	1	Cap Assy., Dist.			
IG-514	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGC-1124B	1	Cover Assy., Dist. Cap			
IGB-230	3	Gasket			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-19S	1	Collar, Shaft			
IGS-21	1	Pointer, Advance Arm			
IGS-38	1	Cover, Housing, Tach. Shaft			
IGS-39	1	Washer, Thrust, Tach. Drive Shaft			
IGS-99	1	Spacer, Cam			
		1 2 3 4 5			

UNIT	APPLICATION
IAL-4004-1M	Chrysler Marine

(Issued 1-27-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAL-4005M DISTRIBUTOR PARTS LIST

IAL-4005M

Part No.	No.	Name of Part	Part No.	No.	Name of Part
	Used	1 2 3 4 5		Used	1 2 3 4 5
GE-47	1	GEAR, Tachometer, Driver	IGH-28	1	Wick, Felt, Cam Sleeve
GE-48	1	GEAR, Tachometer, Follower	IGH-53B	1	Extension, Drive Shaft
IAD-1100L-2	1	Cam & Stop Plate, 6 Cyl. L.H.	IGH-54	1	Sleeve, Drive Shaft
IAD-2004B	1	Plate Assy., Breaker	IGH-55	1	Pin, Drive Shaft
IAD-1004A	1	Plate, Breaker	IGS-38	1	Cover, Housing, Tach. Shaft
IG-676	1	Clip, Spring, Contact Arm	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IG-3927J	1	CONDENSER	IGS-99	1	Spacer, Cam
IGC-175	1	Screw, Spring Clamp, Hex. Hd., #6-32x5/16	IGS-148	1	Shaft, Drive, Tachometer
IGP-3028VS	1	CONTACT SET, BREAKER	IGS-1016B	1	ROTOR
19X-350	1	Washer, Plain, Contact Lock Sc., #8	IGS-1177L	1	Shaft, Drive
19X-353	1	Washer, Plain, Clamp Sc., #6	IGT-69	1	Spring, Anti-Rattle
19X-884	1	Screw, Lock, Breaker Contact, Fil. Hd., #8-32x3/16	SW-213	2	Rivet, Gear & Collar
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6	12X-194	1	Lockwasher, Connector Sc., #6
19X-1546	1	Screw, Condenser Mtg., Fil. Hd., #6-32x5/32	X-294	1	Bearing, Ball, S.A.E. #202
IAK-40	1	Cap, Tachometer Shaft	19X-301	1	Screw, Connector, Rd. Hd., #6-32x3/16
IAL-2017	1	Base Assy., Dist.	X-2878	2	Screw, Breaker Plate Mtg., Fil. Hd., #10-32x5/16
IAD-7A	1	Connector, Term. Stud		1 2 3 4 5	
IAD-8	1	Insulation, Term. Stud, Inner			
IAD-10A	1	Bushing, Ins., Term. Stud			
IG-579A	2	Bearing, Absorbent Bronze			
IGL-8B	1	Stud, Terminal			
IGL-9	1	Washer, Ins., Term. Stud			
X-183B	1	Washer, Plain, Term. Stud, #10			
12X-196	2	Lockwasher, Term. Stud, #10			
X-382A	1	Cup, Grease, 1/8"			
X-2853	2	Nut Term. Stud, Hex., #10-32			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-94	7	Terminal, H.T. Wire			
IG-680	1	Snap Ring, Cam Retaining			
IG-2456	2	Weight, Governor			
IGB-293S	1	Spring, Set, Gov. Weight			
IGC-1107S	1	CAP ASSY., DIST.			
IG-514	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGS-32	1	Plug, Vent. Hole, Rubber			
		1 2 3 4 5			


UNIT	APPLICATION
IAL-4005M	Packard (Marine)

(Issued 10-22-47)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAM-4001 DISTRIBUTOR PARTS LIST

IAM-4001

Part No.	No. Used	Name of Part 1 2 3 4 5	Part No.	No. Used	Name of Part 1 2 3 4 5
IAM-117	1	Cover, Terminal Slot	8X-302	1	Screw, Spring Clamp Rd. Hd., #6-32x1/4
IAM-1100L	1	Cam & Stop Plate L.H. 6 Cyl.	8X-350	1	Washer, Plain, Contact Lock Screw, #8
IAM-2001	1	Base Assy., Dist.	8X-884	1	Screw, Lock, Breaker Contact, Fil. Hd., #8-32x3/16
IAM-6	2	Spring, Cap	X-1012	2	Washer, Lock, Condenser & Clamp Screw, #6
GFM-4J	2	Screw, Spring Attaching Fil. Hd. #10-32	8X-1546	1	Screw, Condenser Mtg., Fil. Hd., #6-32x5/32
IG-579A	1	Bearing, Absorbent Bronze	IGH-28	1	Wick, Felt, Cam Sleeve
IG-579D	1	Bearing Absorbent Bronze	IGS-99	1	Spacer, Cam
IGS-117	1	Wick, Oil	IGS-1016B	1	Rotor
X-489	1	Oiler, Press in Type	IGT-69	1	Spring, Anti-Rattle
XA-655	1	Seal, Oil	SW-213	1	Rivet, Collar, Drive Shaft
IAM-2002L	1	Shaft & Gov. Assy.	12X-196	1	Lockwasher, Terminal Screw, #10
IAM-1002L	1	Shaft, Drive	8X-870	2	Screw, Breaker Plate Mtg., Fil. Hd. #10-32x5/16
IGB-252S	1	Spring Set, Gov. Weight	8X-872	1	Screw, Terminal, Fil. Hd. #10-32x1/4
IGC-2168L	2	Weight, Governor	X-1270	2	Washer, Breaker Plate Mtg., Skpf. #10
IG-90	1	Washer, Thrust, Drive Shaft, Lower			1 2 3 4 5
IG-94	7	Terminal, H.T. Wire			
IG-313	1	Washer, Thrust, Drive Shaft, Upper			
IG-680	1	Snap Ring, Cam Retaining			
IG-1323	1	Cap Assy., Dist.			
IG-514	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGC-1180	1	Coupling, Drive, Dist.			
IGC-2148D	1	Plate Assy., Breaker			
IG-676	1	Clip, Spring, Contact Arm			
IG-2671	1	Condenser			
IGC-1148	1	Plate, Breaker			
IGC-1149†	1	Contact, Breaker			
IGP-3028†	1	Arm Assy., Breaker			
IGP-30	1	Spring			
		1 2 3 4 5			

† Contact Set, Service IGP-3028FS.

Unit	Application
IAM-4001	Aircooled

(Issued 9-16-46)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4001-1,A-1,B-1 DISTRIBUTOR PARTS LIST

IAO-4001-1,A-1,
B-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-6	1	Cover, Terminal Slot	IGS-19S	1	Collar, Shaft
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-114	1	Arm, Advance
IAO-1003	1	CAP ASSY., DIST.	IGS-115	1	Pointer, Advance Arm
IAO-7	1	Contact, Plunger	IGS-1016B	1	ROTOR
IAO-20	1	Spring, Contact	*	1	Cam & Stop Plate, 6 Cyl., R.H.
IAO-2001	1	Base Assy., Dist.	IGS-1112R	1	Shaft, Drive
IAD-14	1	Bracket, Cap Spring	SW-213	1	Rivet, Collar
IAO-9	2	Spring, Clamp Cap	SW-634	1	Washer, Plain, Advance Arm Mtg. Sc.
IAO-13	2	Bracket, Brkr. Plate Mtg.	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAO-14	1	Bracket, Cap Spring	12X-199	1	Lockwasher, Advance Arm, 1/4
IG-579A	2	Bearing, Abs. Bronze	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IGS-117	1	Wick, Felt	X-1270	2	Washer, Breaker Plate Mtg., Sc., Skpf. #10
X-525	4	Rivet, Tubular	* See table following parts list for part number applying to assembly wanted.		
X-1590	1	Oiler			
IAO-2004	1	Plate Assy., Breaker			
IAO-1004	1	Plate, Breaker			
IG-676	1	Clip, Spring, Contact Arm			
IG-3927K	1	CONDENSER			
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGP-3028FS	1	CONTACT SET, BREAKER			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-353	1	Washer, Plain, Clamp Sc., #6			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
*	1	Spring Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			

Assembly No.	Cam & Stop Plate	Spring Set Gov. Weight
IAO-4001-1	IGS-1100R	IG-636NS
IAO-4001A-1	IGS-1100RA	IG-636QS
IAO-4001B-1	IGS-1100RA	IGB-292SS

UNIT	APPLICATION
IAO-4001-1, A-1, B-1	Dodge (Truck) Fargo (Truck)

(Issued 11-9-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4002-1 DISTRIBUTOR PARTS LIST

IAO-4002-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-6	1	Cover, Terminal Slot	IGS-19S	1	Collar, Shaft
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-114	1	Arm, Advance
IAO-1003	1	CAP ASSY., DIST.	IGS-115	1	Pointer, Advance Arm
IAO-7	1	Contact, Plunger	IGS-1016B	1	ROTOR
IAO-20	1	Spring, Contact	IGS-1100RX	1	Cam, & Stop Plate, 6 Cyl, R.H.
IAO-2001	1	Base Assy., Dist.	IGS-1113R	1	Shaft, Drive
IAO-14	1	Bracket, Cap Spring	SW-213	1	Rivet, Collar,
IAO-9	2	Spring, Clamp Cap	SW-634	1	Washer, Plain, Advance Arm Mtg. Sc.
IAO-13	2	Bracket, Brkr. Plate Mtg.	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAO-14	1	Bracket, Cap Spring	12X-199	1	Lockwasher, Advance Arm, 1/4
IG-579A	2	Bearing, Abs. Bronze	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IGS-117	1	Wick, Felt	X-1270	2	Washer, Breaker Plate Mtg. Sc. Skpf. #10
X-525	4	Rivet, Tubular			
X-1590	1	Oiler			
IAO-2004	1	Plate Assy., Breaker			
IAO-1004	1	Plate, Breaker			
IG-676	1	Clip, Spring, Contact Arm			
IG-3927K	1	CONDENSER			
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGP-3028FS	1	CONTACT SET, BREAKER			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
8X-350	1	Washer, Plain, Contact Lock Sc. #8			
8X-353	1	Washer, Plain, Clamp Sc., #6			
8X-884	1	Screw, Lock, Breaker Contact Fil. Hd., #8-32x3/16			
X-1546	1	Screw, Condenser Mtg., Fil. Hd. #6-32x5/32			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-636HS	1	Spring, Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			

UNIT	APPLICATION
IAO-4002-1	Fargo (Truck), Dodge (Truck)

(Issued 11-9-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4003-1 DISTRIBUTOR PARTS LIST

IAO-4003-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-6	1	Cover, Terminal Slot	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-1016B	1	ROTOR
IAO-1003	1	CAP ASSY., DIST.	IGS-1060R	1	Shaft, Drive
IAO-7	1	Contact, Plunger	IGS-1100RW	1	Cam, & Stop Plate, 6 Cyl. R.H.
IAO-20	1	Spring, Contact	SW-213	1	Rivet, Coupling
IAO-2004	1	Plate Assy., Breaker	8X-870	2	Screw, Breaker Plate Mtg., Fil. Hd. #10-32x5/16
IAO-1004	1	Plate, Breaker	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IG-676	1	Clip, Spring, Contact Arm			
IG-3927K	1	CONDENSER			
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGP-3028FS	1	CONTACT SET, BREAKER			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-353	1	Washer, Plain, Clamp Sc., #6			
8X-884	1	Screw, Lock, Breaker Contact, Fil. Hd., #8-32x3/16			
8X-1546	1	Screw, Condenser Mtg., Fil. Hd., #6-32x5/32			
IAO-2012	1	Base Assy., Dist.			
IAD-14	1	Bracket, Cap Spring			
IAO-9	2	Spring, Clamp Cap			
IAO-13	2	Bracket, Brkr. Plate Mtg.			
IAO-14	1	Bracket, Cap Spring			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-488	1	Oiler			
X-525	4	Rivet, Tubular			
IG-90A	1	Washer, Thrust, Drive Shaft, Lower			
IG-636HS	1	Spring Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGC-133	1	Coupling, Dist. Drive			
IGC-135	1	Pointer, Advance Arm			
IGC-1134	1	Arm, Advance			

UNIT	APPLICATION
IAO-4003-1	Dodge (Truck), Fargo (Truck)

(Issued 11-10-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4101-1,A-1,B-1 DISTRIBUTOR PARTS LIST

IAO-4101-1,
A-1,B-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-115	1	Pointer, Advance Arm
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-1016B	1	ROTOR
IAO-17	1	Cover, Terminal Slot	*	1	Cam & Stop Plate, 6 Cyl. R.H.
IAO-1003	1	CAP ASSY., DIST.	IGS-1112RA	1	Shaft, Drive
IAO-7	1	Contact, Plunger	SW-213	1	Rivet, Collar
IAO-20	1	Spring, Contact	SW-634	1	Washer, Plain, Adv. Arm Mtg. Screw
IAO-2004	1	Plate Assy., Breaker	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAO-1004	1	Plate, Breaker	12X-199	1	Lockwasher, Advance Arm, 1/4
IG-676	1	Clip, Spring, Contact Arm	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IG-3927K	1	CONDENSER	X-1270	2	Washer, Breaker Plate Sc., Skpf. #10
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	* See table following parts list for part number applying to assembly wanted.		
IGP-3028FS	1	CONTACT SET, BREAKER			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-353	1	Washer, Plain, Clamp Sc., #6			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2018	1	Base Assy., Dist.			
IAD-14	1	Bracket, Cap Spring			
IAO-9	2	Spring, Clamp Cap			
IAO-13	2	Bracket, Brkr. Plate Mtg.	Assembly No.	Cam & Stop Plate	Spring Set
IAO-14	1	Bracket, Cap Spring	IAO-4101-1	IGS-1100R	IG-636NS
IG-579A	2	Bearing, Abs. Bronze	IAO-4101A-1	IGS-1100RA	IG-636QS
IGS-117	1	Wick, Felt	IAO-4101B-1	IGS-1100RA	IGB-292SS
X-525	4	Rivet, Tubular			
X-1590	1	Oiler			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
*	1	Spring Set, Gov. Weight			
IG-1456	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-19S	1	Collar, Shaft			
IGS-99	1	Spacer, Cam			
IGS-114	1	Arm, Advance			

UNIT	APPLICATION
IAO-4101-1, A-1,B-1	Dodge (Truck) Fargo (Truck)

(Issued 11-10-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4101-1M DISTRIBUTOR PARTS LIST

IAO-4101-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner Drive Shaft, Upper	IGB-292SS	1	Spring Set, Gov. Weight
IAO-11	1	Washer, Thrust, Outer Drive Shaft, Upper	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-17M	1	Cover, Terminal Slot	IGS-19S	1	Collar, Shaft
IAO-1003	1	CAP ASSY., DIST.	IGS-99	1	Spacer, Cam
IAO-7	1	Contact, Plunger	IGS-114	1	Arm, Advance
IAO-20	1	Spring, Contact	IGS-115M	1	Pointer, Advance Arm
IAO-2004M	1	Plate Assy., Breaker	IGS-1016B	1	ROTOR
IAO-1004M	1	Plate, Breaker	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IG-676	1	Clip, Breaker Arm Spring	IGS-1112RC	1	Shaft, Drive
IG-3927K	1	CONDENSER	SW-213	1	Rivet, Collar
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	SW-634B	1	Washer, Plain, Advance Arm Mtg.
IGP-3028VS	1	CONTACT SET, BREAKER	12X-199	1	Lockwasher, Advance Arm 1/4
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
19X-353	1	Washer, Plain, Clamp Screw, #6	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2018M	1	Base Assy., Dist.			
IAD-14A	1	Bracket, Cap Spring			
IAO-9M	2	Spring, Clamp Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-1590	1	Oiler			
X-2872	4	Rivet, Tubular			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

UNIT	APPLICATION
IAO-4101-1M	Chrysler (Marine)

(Issued 9-13-50)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4102-1 DISTRIBUTOR PARTS LIST

IAO-4102-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-1016B	1	ROTOR
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-1100RX	1	Cam & Stop Plate, 6 Cyl. R.H.
IAO-17	1	Cover, Terminal Slot	IGS-1113RA	1	Shaft, Drive
IAO-1003	1	CAP ASSY., DIST.	SW-213	1	Rivet, Collar
IAO-7	1	Contact, Plunger	SW-634	1	Washer, Plain, Adv. Arm Mtg. Sc.
IAO-20	1	Spring, Contact	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAO-2004	1	Plate Assy., Breaker	12X-199	1	Lockwasher, Advance Arm, 1/4
IAO-1004	1	Plate, Breaker	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IG-676	1	Clip, Spring, Contact Arm	X-1270	2	Washer, Breaker Plate Sc., Skpf., #10
IG-3927K	1	CONDENSER			
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGP-3028FS	1	CONTACT SET, BREAKER			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-353	1	Washer, Plain, Clamp Sc., #6			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2018	1	Base Assy., Dist.			
IAO-14	1	Bracket, Cap Spring			
IAO-9	2	Spring, Clamp Cap			
IAO-13	2	Bracket, Brkr. Plate Mtg.			
IAO-14	1	Bracket, Cap Spring			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-525	4	Rivet, Tubular			
X-1590	1	Oiler			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-636HS	1	Spring Set, Gov. Weight			
IG-1456	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-19S	1	Collar, Shaft			
IGS-99	1	Spacer, Cam			
IGS-114	1	Arm, Advance			
IGS-115	1	Pointer, Advance Arm			

UNIT	APPLICATION
IAO-4102-1	Dodge (Truck), Fargo (Truck)

(Issued 11-10-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4102-1M DISTRIBUTOR PARTS LIST

IAO-4102-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner Drive Shaft, Upper	IGB-292SS	1	Spring Set, Governor Weight
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-17M	1	Cover, Terminal Slot	IGS-19S	1	Collar, Shaft
IAO-1003	1	CAP ASSY., DIST.	IGS-99	1	Spacer, Cam
IAO-7	1	Contact, Plunger	IGS-114	1	Arm, Advance
IAO-20	1	Spring, Contact	IGS-115M	1	Pointer, Advance Arm
IAO-2004M	1	Plate Assy., Breaker	IGS-1016B	1	ROTOR
IAO-1004M	1	Plate, Breaker	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IG-676	1	Clip, Breaker Arm Spring	IGS-1113RC	1	Shaft Drive
IG-3927K	1	CONDENSER	SW-213	1	Rivet, Collar
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	SW-634B	1	Washer, Plain, Adv. Arm. Mtg.
IGP-3028VS	1	CONTACT SET, BREAKER	12X-199	1	Lockwasher, Advance Arm 1/4
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	X-1270	2	Washer, Breaker Plate Mtg. Sc. Skpf. #10
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
19X-353	1	Washer, Plain, Clamp Screw, #6	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2018M	1	Base Assy., Dist.			
IAD-14A	1	Bracket, Cap Spring			
IAO-9M	2	Spring, Clamp Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-1590	1	Oiler			
X-2872	4	Rivet, Tubular			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

UNIT	APPLICATION
IAO-4102-1M	Chrysler (Marine)

(Issued 9-13-50)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4103-1,A-1 DISTRIBUTOR PARTS LIST

IAO-4103-1,A-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IG-680	1	Snap Ring, Cam Retaining
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IG-636HS	1	Spring Set, Gov. Weight
IAO-17	1	Cover, Terminal Slot	IG-1456	2	Weight, Governor
IAO-1003	1	CAP ASSY., DIST.	IGC-133	1	Coupling, Dist. Drive
IAO-7	1	Contact, Plunger	IGC-135	1	Pointer, Advance Arm
IAO-20	1	Spring, Contact	IGC-1134	1	Arm, Advance
IAO-2004	1	Plate Assy., Breaker	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-1004	1	Plate, Breaker	IGS-99	1	Spacer, Cam
IG-676	1	Clip, Spring, Contact Arm	IGS-1016B	1	ROTOR
IG-3927K	1	CONDENSER	IGS-1060R	1	Shaft, Drive
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	*	1	Cam & Stop Plate, 6 Cyl. R.H.
IGP-3028FS	1	CONTACT SET, BREAKER	SW-213	1	Rivet, Coupling, Drive Shaft
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
8X-350	1	Washer, Plain, Contact Lock Screw, #8	X-1270	2	Washer, Breaker Plate Sc., Skpf. #10
8X-353	1	Washer, Plain, Clamp Sc., #6	* See table following parts list for part number applying to assembly wanted.		
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	Unit	Cam & Stop Plate	
IAO-2019	1	Base Assy., Dist.	IAO-4103-1	IGS-1100RW	
IAD-14	1	Bracket, Cap Spring	IAO-4103A-1	IGS-1100R	
IAO-9	2	Spring, Clamp Cap			
IAO-13	2	Bracket, Brkr. Plate Mtg.			
IAO-14	1	Bracket, Cap Spring			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-488	1	Oiler			
X-525	4	Rivet, Tubular			
IG-90A	1	Washer, Thrust, Drive Shaft, Lower			

UNIT	APPLICATION
IAO-4103-1	Dodge (Truck)
IAO-4103A-1	Dodge (Truck)

(Issued 10-20-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4103-1F, A-1F DISTRIBUTOR PARTS LIST

IAO-4103-1F, A-1F
(Issued 2-4-54)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGC-133	1	COUPLING, DIST. DRIVE
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGC-135	1	Pointer, Advance Arm
IAO-17	1	Cover, Terminal Slot	IGC-1134	1	Arm, Advance
IAO-1003	1	CAP ASSY., DIST.	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-7	1	Contact, Plunger	IGS-99	1	Spacer, Cam
IAO-20	1	Spring, Contact	IGS-1016B	1	ROTOR
IAO-2004A	1	Plate Assy., Breaker	IGS-1060R	1	Shaft, Drive
IAO-1004S	1	Plate, Breaker	*	1	Cam & Stop Plate, 6 Cyl. R. H.
IG-676	1	Clip, Contact Arm Spring	SW-213	1	Rivet, Coupling
IG-3927K	1	CONDENSER	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IGP-3028FS	1	CONTACT SET, BREAKER			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-353	1	Washer, Plain, Clamp Screw, #6			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2019S	1	Base Assy., Dist.			
IAD-14	1	Bracket, Cap Spring			
IAO-9	2	Spring, Clamp, Cap			
IAO-13	2	Bracket, Brkr. Plate Mtg.			
IAO-14	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-488	1	Oiler			
X-525	4	Rivet, Tubular			
IG-90A	1	Washer, Thrust, Drive Shaft, Lower			
IG-636HS	1	Spring Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Cam & Stop Plate
IAO-4103-1F	IGS-1100RW
IAO-4103A-1F	IGS-1100R

UNIT	APPLICATION
IAO-4103-1F	Dodge Truck
IAO-4103A-1F	Dodge Truck

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking such parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4103-1M DISTRIBUTOR PARTS LIST

IAO-4103-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner Drive Shaft, Upper	IGC-133	1	Coupling, Dist. Drive
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGC-135M	1	Pointer, Advance Arm
IAO-17M	1	Cover, Terminal Slot	IGC-1134M	1	Arm, Advance
IAO-1003	1	CAP ASSY., DIST.	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-7	1	Contact, Plunger	IGS-99	1	Spacer, Cam
IAO-20	1	Spring, Contact	IGS-1016B	1	ROTOR
IAO-2004M	1	Plate Assy., Breaker	IGS-1060RA	1	Shaft, Drive
IAO-1004M	1	Plate, Breaker	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IG-676	1	Clip, Breaker Arm Spring	SW-213	1	Rivet, Coupling
IG-3927K	1	CONDENSER	X-1270	2	Washer, Breaker Plate Mtg. Sc. Skpf. #10
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IGP-3028VS	1	CONTACT SET, BREAKER			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
19X-350	1	Washer, Plain, Contact Lock Screw, #8			
19X-353	1	Washer, Plain, Clamp Sc., #6			
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2019M	1	Base Assy., Dist.			
IAD-14A	1	Bracket, Cap Spring			
IAO-9M	2	Spring, Clamp Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-488	1	Oiler			
X-2872	4	Rivet, Tubular			
IG-90A	1	Washer, Thrust, Drive Shaft, Lower			
IG-636HS	1	Spring Set, Governor Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

UNIT	APPLICATION
IAO-4103-1M	Chrysler (Marine)

(Issued 9-13-50)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4105-1M DISTRIBUTOR PARTS LIST

IAO-4105-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGB-292SS	1	Spring Set, Gov. Weight
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-17M	1	Cover, Terminal Slot	IGS-19S	1	Collar, Shaft
IAO-1003	1	CAP ASSY., DIST.	IGS-38	1	Cover, Housing, Tach. Shaft
IAO-7	1	Contact, Plunger	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IAO-20	1	Spring, Contact	IGS-99	1	Spacer, Cam
IAO-2004M	1	Plate Assy., Breaker	IGS-114	1	Arm, Advance
IAO-1004M	1	Plate, Breaker	IGS-115M	1	Pointer, Advance Arm
IG-676	1	Clip, Breaker Arm Spring	IGS-148	1	Shaft, Drive, Tachometer
IG-3927K	1	CONDENSER	IGS-1016B	1	ROTOR
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IGP-3028VS	1	CONTACT SET, BREAKER	IGS-1166RA	1	Shaft, Drive
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	SW-213	2	Rivet, Gear & Collar
19X-350	1	Washer, Plain, Contact Lock Screw, #8	SW-634B	1	Washer, Plain, Advance Arm Mtg.
19X-353	1	Washer, Plain, Clamp Screw, #6	12X-199	1	Lockwasher, Advance Arm, 1/4
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	X-294	1	Bearing, Ball, S.A.E. #202
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IAO-2021M	1	Base Assy., Dist.	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
IAD-14A	1	Bracket, Cap Spring	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IAO-9M	2	Spring, Clamp Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
X-382A	1	Cup, Grease			
X-2943	4	Rivet, Tubular			
IG-90	2	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

UNIT	APPLICATION
IAO-4105-1M	Chrysler (Marine)

(Issued 9-13-50)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4106-1M DISTRIBUTOR PARTS LIST

IAO-4106-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGC-133	1	Coupling, Dist. Drive
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGC-135M	1	Pointer, Advance Arm
IAO-17M	1	Cover, Terminal Slot	IGC-1134M	1	Arm, Advance
IAO-1003	1	Cap Assy., Dist.	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-7	1	Contact, Plunger	IGS-38	1	Cover, Housing, Tach. Shaft
IAO-20	1	Spring, Contact	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IAO-2004M	1	Plate Assy., Breaker	IGS-99	1	Spacer, Cam
IAO-1004M	1	Plate, Breaker	IGS-148	1	Shaft, Drive, Tachometer
IG-676	1	Clip, Breaker Arm Spring	IGS-1016B	1	ROTOR
IG-3927K	1	CONDENSER	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-1205R	1	Shaft, Drive
IGP-3028VS	1	CONTACT SET, BREAKER	SW-213	2	Rivet, Gear & Coupling
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	X-294	1	Bearing, Ball, S.A.E. #202
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
19X-353	1	Washer, Plain, Clamp Screw, #6	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg. Fill. Hd. #6-32x5/32			
IAO-2022M	1	Base Assy., Dist.			
IAD-14A	1	Bracket, Cap Spring			
IAO-9M	2	Spring, Clamp Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
X-382A	1	Cup, Grease			
X-2943	4	Rivet, Tubular			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-90A	1	Washer, Thrust, Drive Shaft, Lower			
IG-636HS	1	Spring Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

UNIT	APPLICATION
IAO-4106-1M	Chrysler (Marine)

(Issued 9-13-50)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4107-1M DISTRIBUTOR PARTS LIST

IAO-4107-1M
(Issued 5-5-51)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGS-99	1	Spacer, Cam
IAO-17M	1	Cover, Terminal Slot	IGS-114	1	Arm, Advance
IAO-1003	1	CAP ASSY., DIST	IGS-115M	1	Pointer, Advance Arm
IAO-7	1	Contact, Plunger	IGS-148	1	Shaft, Drive, Tachometer
IAO-20	1	Spring, Contact	IGS-1016B	1	ROTOR
IAO-2004M	1	Plate Assy., Breaker	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IAO-1004M	1	Plate, Breaker	IGS-1165RC	1	Shaft, Drive
IG-676	1	Clip, Breaker Arm Spring	SW-213	2	Rivet, Gear & Collar
IG-3927K	1	CONDENSER	SW-634B	1	Washer, Plain, Advance Arm Mtg.
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	12X-199	1	Lockwasher, Advance Arm, 1/4
IGP-3028VS	1	CONTACT SET, BREAKER	X-294	1	Bearing, Ball, S. A. E. #202
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
19X-353	1	Washer, Plain, Clamp Screw, #6	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2023M	1	Base Assy., Dist.			
IAD-14A	1	Bracket, Cap Spring			
IAO-9M	2	Spring, Clamp, Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
X-382A	1	Cup, Grease			
X-2872	4	Rivet, Tubular			
IG-90	2	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGB-292SS	1	Spring Set, Gov. Weight			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-19S	1	Collar, Shaft			
IGS-38	1	Cover, Housing, Tach. Shaft			

UNIT	APPLICATION
IAO-4107-1M	Chrysler (Marine)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4108-1M DISTRIBUTOR PARTS LIST

IAO-4108-1M
(Issued 5-7-51)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGS-99	1	Spacer, Cam
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGS-114	1	Arm, Advance
IAO-17M	1	Cover, Terminal Slot	IGS-115M	1	Pointer, Advance Arm
IAO-1003	1	CAP ASSY., DIST.	IGS-148	1	Shaft, Drive, Tachometer
IAO-7	1	Contact, Plunger	IGS-1016B	1	ROTOR
IAO-20	1	Spring, Contact	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IAO-2004M	1	Plate Assy., Breaker	IGS-1166RB	1	Shaft, Drive
IAO-1004M	1	Plate, Breaker	SW-213	2	Rivet, Gear & Collar
IG-676	1	Clip, Breaker Arm Spring	SW-634B	1	Washer, Plain, Advance Arm Mtg.
IG-3927K	1	CONDENSER	12X-199	1	Lockwasher, Advance Arm, 1/4
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	X-294	1	Bearing, Ball, S. A. E. #202
IGP-3028VS	1	CONTACT SET, BREAKER	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-353	1	Washer, Plain, Clamp Screw, #6			
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2023M	1	Base Assy., Dist.			
IAD-14A	1	Bracket, Cap Spring			
IAO-9M	2	Spring, Clamp, Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
X-382A	1	Cup, Grease			
X-2872	4	Rivet, Tubular			
IG-90	2	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGB-292SS	1	Spring Set, Governor Weight			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-19S	1	Collar, Shaft			
IGS-38	1	Cover, Housing, Tach. Shaft			
IGS-39	1	Washer, Thrust, Tach. Drive Shaft			

UNIT	APPLICATION
IAO-4108-1M	Chrysler (Marine)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4109-1M DISTRIBUTOR PARTS LIST

IAO-4109-1M
(Issued 5-7-51)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IG-90	1	Washer, Thrust, Drive Shaft, Lower
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IG-680	1	Snap Ring, Cam Retaining
IAO-17M	1	Cover, Terminal Slot	IGB-292SS	1	Spring Set, Gov. Weight
IAO-1003	1	CAP ASSY., DIST.	IGC-2168R	2	Weight, Governor
IAO-7	1	Contact, Plunger	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-20	1	Spring, Contact	IGS-19S	1	Collar, Shaft
IAO-2004M	1	Plate Assy., Breaker	IGS-99	1	Spacer, Cam
IAO-1004M	1	Plate, Breaker	IGS-114	1	Arm, Advance
IG-676	1	Clip, Breaker Arm Spring	IGS-115M	1	Pointer, Advance Arm
IG-3927K	1	CONDENSER	IGS-1016B	1	ROTOR
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R.H.
IGP-3028VS	1	CONTACT SET, BREAKER	IGS-1113RF	1	Shaft, Drive
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	SW-213	1	Rivet, Collar
19X-350	1	Washer, Plain, Contact Lock Screw, #8	SW-634B	1	Washer, Plain, Advance Arm, Mtg.
19X-353	1	Washer, Plain, Clamp Screw, #6	12X-199	1	Lockwasher, Advance Arm, 1/4
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
IAO-2018M	1	Base Assy., Dist.	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IAD-14A	1	Bracket, Cap Spring			
IAO-9M	2	Spring, Clamp, Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-14M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-1590	1	Oiler			
X-2872	4	Rivet, Tubular			

UNIT	APPLICATION
IAO-4109-1M	Chrysler (Marine)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4110-1M DISTRIBUTOR PARTS LIST

IAO-4110-1M
(Issued 4-2-53)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	Gear, Tachometer, Driver	IG-90	1	Washer, Thrust, Drive Shaft
GE-48	1	Gear, Tachometer, Follower	IG-90A	1	Washer, Thrust, Drive Shaft, Lower
IAO-17M	1	Cover, Terminal Slot	IG-636HS	1	Spring Set, Gov. Weight
IAO-1003	1	CAP, ASSY., DIST.	IG-680	1	Snap Ring, Cam Retaining
IAO-7	1	Contact, Plunger	IGC-133	1	COUPLING, DIST. DRIVE
IAO-20	1	Spring, Contact	IGC-135M	1	Pointer, Advance Arm
IAO-2004M	1	Plate Assy., Breaker	IGC-1134M	1	Arm, Advance
IAO-1004M	1	Plate, Breaker	IGC-2168R	2	Weight, Governor
IG-676	1	Clamp, Breaker Arm	IGH-28	1	Wick, Felt, Cam Sleeve
		Spring	IGS-38	1	Cover, Housing, Tach. Shaft
IG-3927K	1	CONDENSER	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-99	1	Spacer, Cam
IGP-3028VS	1	CONTACT SET, BREAKER	IGS-148	1	Shaft, Drive, Tachometer
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	IGS-1016B	1	ROTOR
19X-350	1	Washer, Plain, Contact	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R. H. Shaft, Drive
		Lock Screw, #8	IGS-1205RA	1	
19X-353	1	Washer, Plain, Clamp	SW-213	2	Rivet, Gear & Coupling
		Screw, #6	X-294	1	Bearing, Ball, S. A. E. #202
19X-884	1	Screw, Lock, Breaker	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
		Contact, Fill. Hd. #8-32x3/16	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2022M	1	Base Assy., Dist.			
IAO-1014M	1	Spring & Hinge, Clamp, Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-1014M	1	Spring & Hinge, Clamp, Cap Locating			
IG-579A	2	Bearing, Abs. Bronze			
X-382A	1	Cup, Grease			
X-2872	4	Rivet, Tubular			

UNIT	APPLICATION
IAO-4110-1M	Chrysler (Marine)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4111-1M DISTRIBUTOR PARTS LIST

IAO-4111-1M
(Issued 1-30-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IG-90A	1	Washer, Thrust, Drive Shaft, Lower
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IG-636HS	1	Spring Set, Gov. Weight
IAO-17M	1	Cover, Terminal Slot	IG-680	1	Snap Ring, Cam Retaining
IAO-1003	1	CAP ASSY., DIST.	IGC-133	1	Coupling, Dist. Drive
IAO-7	1	Contact, Plunger	IGC-135M	1	Pointer, Advance Arm
IAO-20	1	Spring, Contact	IGC-1134M	1	Arm, Advance
IAO-2004M	1	Plate Assy., Breaker	IGC-2168R	2	Weight, Governor
IAO-1004M	1	Plate, Breaker	IGH-28	1	Wick, Felt, Cam Sleeve
IG-676	1	Clamp, Breaker Arm Spring	IGS-99	1	Spacer, Cam
IG-3927K	1	CONDENSER	IGS-1016B	1	ROTOR
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-1060RB	1	Shaft, Drive
IGP-3028VS	1	CONTACT SET, BREAKER	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R. H.
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	SW-213	1	Rivet, Coupling
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
19X-353	1	Washer, Plain, Clamp Screw, #6	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2019M	1	Base Assy., Dist.			
IAD-1014M	1	Spring & Hinge, Clamp, Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-1014M	1	Spring & Hinge, Clamp, Cap Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-488	1	Oiler			
X-2872	4	Rivet, Tubular			

UNIT	APPLICATION
IAO-4111-1M	Chrysler Marine

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4112-1M DISTRIBUTOR PARTS LIST

IAO-4112-1M

(Issued 7-8-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGB-292SS	1	Spring Set, Gov. Weight
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGC-2168R	2	Weight, Governor
IAO-17M	1	Cover, Terminal Slot	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-1003	1	CAP ASSY. ,DIST.	IGS-19S	1	Collar, Shaft
IAO-7	1	Contact, Plunger	IGS-38	1	Cover, Housing, Tach. Shaft
IAO-20	1	Spring, Contact	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IAO-2004M	1	Plate Assy. , Breaker	IGS-99	1	Spacer, Cam
IAO-1004M	1	Plate, Breaker	IGS-114A	1	Arm, Advance
IG-676	1	Clamp, Breaker Arm	IGS-115M	1	Pointer, Advance Arm
		Spring	IGS-148	1	Shaft, Drive, Tachometer
IG-3927K	1	CONDENSER	IGS-1016B	1	ROTOR
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R. H.
IGP-3028VS	1	CONTACT SET, BREAKER	IGS-1165RD	1	Shaft, Drive
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	SW-213	2	Rivet, Gear & Collar
19X-350	1	Washer, Plain, Contact	SW-634B	1	Washer, Plain, Advance Arm Mtg.
		Lock Screw, #8	12X-199	1	Lockwasher, Advance Arm, 1/4
19X-353	1	Washer, Plain, Clamp Screw, #6	X-294	1	Bearing, Ball, S. A. E. #202
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	X-1270	2	Washer, Breaker Plate Mtg. Sc. , Skpf. #10
19X-1546	1	Screw, Condenser Mtg. , Fill. Hd. #6-32x5/32	X-2862	1	Screw, Advance Arm Mtg. , Hex. Hd. 1/4-20x5/8
IAO-2023M	1	Base Assy. , Dist.	X-2896	2	Screw, Breaker Plate Mtg. , Fill. Hd. #10-32x5/16
IAO-1014M	1	Bracket, Cap Spring			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-1014M	1	Bracket, Cap Spring & Locating			
IG-579A	2	Bearing, Abs. Bronze			
X-382A	1	Cup, Grease			
X-2872	4	Rivet, Tubular			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-680	1	Snap Ring, Cam Retaining			

UNIT	APPLICATION
IAO-4112-1M	Chrysler Marine

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4113-1M DISTRIBUTOR PARTS LIST

IAO-4113-1M
(Issued 1-30-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	Gear, Tachometer, Driver	IG-90	2	Washer, Thrust, Drive Shaft
GE-48	1	Gear, Tachometer, Follower	IG-680	1	Snap Ring, Cam Retaining
IAO-17M	1	Cover, Terminal Slot	IGB-292SS	1	Spring Set, Gov. Weight
IAO-1003	1	CAP ASSY., DIST.	IGC-2168R	2	Weight, Governor
IAO-7	1	Contact, Plunger	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-20	1	Spring, Contact	IGS-19S	1	Collar, Shaft
IAO-2004M	1	Plate Assy., Breaker	IGS-38	1	Cover, Housing, Tach. Shaft
IAO-1004M	1	Plate, Breaker	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IG-676	1	Clamp, Breaker Arm Spring	IGS-99	1	Spacer, Cam
IG-3927K	1	CONDENSER	IGS-114	1	Arm, Advance
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	IGS-115M	1	Pointer, Advance Arm
IGP-3028VS	1	CONTACT SET, BREAKER	IGS-148	1	Shaft, Drive Tachometer
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	IGS-1016B	1	ROTOR
19X-350	1	Washer, Plain, Contact Lock Screw, #8	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R. H.
19X-353	1	Washer, Plain, Clamp Screw, #6	IGS-1166RC	1	Shaft, Drive
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	SW-213	2	Rivet, Gear & Collar
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	SW-634B	1	Washer, Plain, Advance Arm Mtg.
IAO-2023M	1	Base Assy., Dist.	12X-199	1	Lockwasher, Advance Arm, 1/4
IAD-1014M	1	Spring & Hinge, Clamp, Cap	X-294	1	Bearing, Ball, S. A. E. #202
IAO-13M	2	Bracket, Breaker Plate Mtg.	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IAO-1014M	1	Spring & Hinge, Clamp, Cap Locating	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
IG-579A	2	Bearing, Abs. Bronze	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
X-382A	1	Cup, Grease			
X-2872	4	Rivet, Tubular			

UNIT	APPLICATION
IAO-4113-1M	Chrysler Industrial, Chrysler Marine

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4114-1M, A-1M DISTRIBUTOR PARTS LIST

IAO-4114-1M, A-1M
(Issued 10-14-55)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGB-292SS	1	Spring Set, Gov. Weight
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGC-2168R	2	Weight, Governor
IAO-17M	1	Cover, Terminal Slot	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-1003	1	CAP ASSY., DIST.	IGS-19S	1	Collar, Shaft
IAO-7	1	Contact, Plunger	IGS-99	1	Spacer, Cam
IAO-20	1	Spring, Contact	IGS-114A	1	Arm, Advance
IAO-2004M	1	Plate Assy., Breaker	IGS-1016B	1	ROTOR
IAO-1004M	1	Plate, Breaker	**	1	Cam & Stop Plate, 6 Cyl. R. H.
IG-676	1	Clip, Breaker Arm Spring	IGS-1112RJ	1	Shaft, Drive
IG-3927K	1	CONDENSER	**	1	Spring, Anti-Rattle
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	SW-213	1	Rivet, Collar
IGP-3028VS	1	CONTACT SET, BREAKER	SW-634B	1	Washer, Plain, Advance Arm Mtg. Sc.
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	12X-199	1	Lockwasher, Advance Arm, 1/4
19X-350	1	Washer, Plain, Contact Lock Screw, #8	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
19X-353	1	Washer, Plain, Clamp Screw, #6	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	** See table following parts list for part number applying to assembly wanted.		
IAO-2025M	1	Base Assy., Dist.	Assembly No.	Cam & Stop Plate	Anti-Rattle Spring
IAD-1014M	1	Spring & Hinge, Clamp, Cap	IAO-4114-1M	IGS-1100RB-3	None
IAO-13M	2	Bracket, Breaker Plate Mtg.	IAO-4114A-1M	IGS-1100RE-3	IGT-70
IAO-1014M	1	Spring & Hinge, Clamp, Cap Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-1590	1	Oiler			
X-2872	4	Rivet, Tubular			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			

UNIT	APPLICATION
IAO-4114-1M	Chrysler Industrial, Chrysler Marine
IAO-4114A-1M	Chrysler Industrial, Chrysler Marine

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4115-1M DISTRIBUTOR PARTS LIST

IAO-4115-1M

(Issued 7-8-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGC-133	1	COUPLING, DIST. DRIVE
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGC-135M	1	Pointer, Advance Arm
IAO-17M	1	Cover, Terminal Slot	IGC-1134M	1	Arm, Advance
IAO-1003	1	CAP ASSY., DIST.	IGC-2168R	2	Weight, Governor
IAO-7	1	Contact, Plunger	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-20	1	Spring, Contact	IGS-99	1	Spacer, Cam
IAO-2004M	1	Plate Assy., Breaker	IGS-1016B	1	ROTOR
IAO-1004M	1	Plate, Breaker	IGS-1060RB	1	Shaft, Drive
IG-676	1	Clamp, Breaker Arm Spring	IGS-1100RB-3	1	Cam & Stop Plate, 6 Cyl. R. H.
IG-3927K	1	CONDENSER	SW-213	1	Rivet, Coupling
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IGP-3028VS	1	CONTACT SET, BREAKER	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
19X-350	1	Washer, Plain, Contact Lock Screw, #8			
19X-353	1	Washer, Plain, Clamp Screw, #6			
19X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAO-2024M	1	Base Assy., Dist.			
IAO-1014M	1	Spring & Hinge, Clamp, Cap			
IAO-13M	2	Bracket, Breaker Plate Mtg.			
IAO-1014M	1	Spring & Hinge, Clamp, Cap Locating			
IG-579A	2	Bearing, Abs. Bronze			
IGS-117	1	Wick, Felt			
X-488	1	Oiler			
X-2872	4	Rivet, Tubular			
IG-90A	1	Washer, Thrust, Drive Shaft, Lower			
IG-636HS	1	Spring Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			

UNIT	APPLICATION
IAO-4115-1M	Chrysler Marine

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAO-4116-1, A-1 DISTRIBUTOR PARTS LIST

IAO-4116-1, A-1
(Issued 4-9-57)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner Drive Shaft, Upper	IAO-9	2	Spring, Clamp, Cap
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IAO-13	2	Bracket, Brkr. Plate Mtg.
IAO-17	1	Cover, Terminal Slot	IAO-14	1	Bracket, Cap Spring & Locating
IAO-1003	1	CAP ASSY, DISTRIBUTOR	IG-579A	2	Bearing, Abs. Bronze
IAO-7	1	Contact, Plunger	IGS-117	1	Wick, Felt
IAO-20	1	Spring, Contact	X-488	1	Oiler
IAO-2004	1	Plate Assy., Breaker	X-525	4	Rivet, Tubular
IAO-1004	1	Plate, Breaker	IG-90A	1	Washer, Thrust, Drive Shaft, Lower
IBB-1042SS-1	1	CONDENSER PACKAGE	IG-636HS	1	Spring Set, Gov. Weight
IG-676	1	Clip, Breaker Arm Spring	IG-680	1	Snap Ring, Cam Retaining
IGC-175	1	Screw, Spring Clamp Hex. Hd. #6-32x5/16	IGC-133	1	Coupling, Dist. Drive
IGP-3028 FS	1	Contact Set Breaker	IGC-135	1	Pointer, Advance Arm
12X-194	2	Lockwasher, Condenser & Clamp Screw #6	IGC-1134	1	Arm, Advance
8X-350	1	Washer, Plain, Contact Lock Screw #8	IGC-2168R	2	Weight, Governor
8X-353	1	Washer, Plain, Clamp Screw, #6	IGH-28	1	Wick, Felt, Cam Sleeve
8X-884	1	Screw, Lock Breaker Contact, Fill. Hd. #8-32x3/16	IGS-99	1	Spacer, Cam
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/22	IGS-1016B	1	ROTOR
IAO-2019	1	Base Assy., Distributor	IGS-1060RC	1	SHAFT: DRIVE
IAD-14	1	Bracket, Cap Spring	**	1	Cam & Stop Plate, 6Cyl. R. H.
			SW-213	1	Rivet, Coupling
			8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
			X-1270	2	Washer, Breaker Plate Mtg. Screw, Skpf. #10

** See table following Parts List for Part Number applying to assembly wanted.

Assembly No.	Cam & Stop Plate
IAO-4116-1	IGS-1100RW
IAO-4116A-1	IGS-1100R

UNIT	APPLICATION
IAO-4116-1	Chrysler Industrial Dodge Truck Fargo Truck
IAO-4116A-1	Chrysler Industrial Dodge Truck Fargo Truck

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking such parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAP-4001-1,A-1 DISTRIBUTOR PARTS LIST

IAP-4001-1,A-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-6	1	Cover, Terminal Slot	IGS-17	1	Ring, Lock
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-18	2	Clamp, Bearing, Sub Plate
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-19S	1	Collar, Shaft
IAO-1003	1	CAP ASSY., DIST.	IGS-99	1	Spacer, Cam
IAO-7	1	Contact, Plunger	IGS-114	1	Arm, Advance
IAO-20	1	Spring, Contact	IGS-1016B	1	ROTOR
IAP-7	1	Gasket, Bracket, to Base	**	1	Cam & Stop Plate, 6 Cyl. R.H.
IAP-23	1	Bracket, Vacuum Chamber	IGS-1113R	1	Shaft, Drive
IAP-24	1	Gasket, Vacuum Chamber to Bracket	SW-213	1	Rivet, Collar
IAP-2001	1	Base Assy., Dist.	SW-634	1	Washer, Plain, Advance Arm Mtg. Sc.
IAD-14	1	Bracket, Cap Spring	VC-14	1	Gasket - 1/32" Thick
IAO-13	2	Bracket, Brkr. Plate Mtg.	VC-15	1	Plug
IAO-14	1	Bracket, Cap Spring	VC-46	*	Washer - .032" Thick
IAP-9	2	Cap Spring	VC-46A	*	Washer - .010" Thick
IG-579A	2	Bearing, Abs. Bronze	VC-46B	*	Washer - .065" Thick
IGS-117	1	Wick, Felt	**	1	Spring
X-525	4	Rivet, Tubular	VC-3147	1	VACUUM CHAMBER
X-1590	1	Oiler	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
**	1	Plate Assy., Breaker	12X-196	4	Lockwasher, Vac. Chamber Mtg. Sc. #10
IA-131	1	Clip, Spring, Contact Arm	12X-199	1	Lockwasher, Advance Arm, 1/4
**	1	Plate, Breaker	8X-321	2	Screw, Vacuum Chamber Mtg., Rd. Hd. #10-32x5/16
IG-3927G	1	CONDENSER	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	8X-902	2	Screw, Vac. Bracket Mtg., Fill. Hd. #10-32x3/8
IGE-15	1	Washer, Plain, Clamp Sc., #6	X-1270	4	Washer, Breaker Plate & Vac. Chamber Mtg., Skpf. #10
IGP-3028ES	1	CONTACT SET, BREAKER			
IGS-89	1	Lead Assy.			
IGS-181	1	Lead Assy.			
IGS-1092RS	1	Plate Assy., Sub			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
12X-194	4	Lockwasher, Condenser Mtg. & Lead Sc. #6			
8X-1546	4	Screw, Condenser Mtg. & Lead Fill. Hd. #6-32x5/32			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
**	1	Spring Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGH-28	1	Wick, Felt Cam Sleeve			

* Use as Required.
 ** See table following parts list for part number applying to assembly wanted.
 † See Manual Bulletin IG-11.

UNIT	APPLICATION
IAP-4001-1, A-1	Dodge (Truck)

Unit	Plate Assy.	Plate, Breaker	Spring Set	Cam & Stop Plate	Spring
IAP-4001-1	IAP-3004R	IAP-1004R (Mrkd. 10 †)	IGB-292SS	IGS-1100RW	VC-49 (Blue)
IAP-4001A-1	IAP-3004RB	IAP-1004RB (Mrkd. 8.5 †)	IG-636HS	IGS-1100RX	VC-50 (Orange)

(Issued 11-14-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAP-4002-1,A-1,B-1 DISTRIBUTOR PARTS LIST

IAP-4002-1,
A-1,B-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-6	1	Cover, Terminal Slot	**	1	Spring Set, Gov. Weight
IAO-10	1	Washer, Thrust, Drive Shaft Upper	IG-680	1	Snap Ring, Cam Retaining
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IG-1456	2	Weight Governor
IAO-1003	1	CAP ASSY., DIST.	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-7	1	Contact, Plunger	IGS-17	1	Ring, Lock
IAO-20	1	Spring, Contact	IGS-18	2	Clamp, Bearing, Sub Plate
IAP-7	1	Gasket, Bracket to Base	IGS-19S	1	Collar, Shaft
IAP-23	1	Bracket, Vacuum Chamber	IGS-99	1	Spacer, Cam
IAP-24	1	Gasket, Vacuum Chamber to Bracket	IGS-114	1	Arm, Advance
IAP-2001	1	Base Assy., Dist.	IGS-115	1	Pointer, Advance Arm
IAD-14	1	Bracket, Cap Spring	IGS-1016B	1	ROTOR
IAO-13	2	Bracket, Brkr. Plate Mtg.	IGS-1100RA	1	Cam & Stop Plate, 6 Cyl., R.H.
IAO-14	1	Bracket, Cap Spring	IGS-1112R	1	Shaft, Drive
IAP-9	2	Cap Spring	SW-213	1	Rivet, Collar
IG-579A	2	Bearing, Abs. Bronze	SW-634	1	Washer, Plain, Advance Arm Mtg. Screw
IGS-117	1	Wick, Felt	VC-14	1	Gasket - 1/32" Thick
X-525	4	Rivet, Tubular	VC-15	1	Plug
X-1590	1	Oiler, Press in Elbow, 1/4	VC-46	*	Washer - .032" Thick
**	1	Plate Assy., Breaker	VC-46A	*	Washer - .010" Thick
IA-131	1	Clip, Spring, Contact Arm	VC-46B	*	Washer - .065" Thick
**	1	Plate, Breaker	**	1	Spring
IG-3927G	1	CONDENSER	VC-3147	1	VACUUM CHAMBER
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IGE-15	1	Washer, Plain, Clamp Sc., #6	12X-196	4	Lockwasher, Vac. Chamber Mtg. Sc., #10
IGP-3028ES	1	CONTACT SET, BREAKER	12X-199	1	Lockwasher, Advance Arm 1/4
IGS-89	1	Lead Assy.	8X-321	2	Screw, Vacuum Chamber Mtg., Rd. Hd. #10-32x5/16
IGS-181	1	Lead Assy.	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IGS-1092RS	1	Plate Assy., Sub	8X-902	2	Screw, Vac. Bracket Mtg., Fill. Hd. #10-32x3/8
8X-350	1	Washer, Plain Contact Lock Screw, #8	X-1270	4	Washer, Breaker Plate & Vac. Chamber Mtg., Skpf. #10
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
12X-194	4	Lockwasher, Condenser Mtg. & Lead Sc. #6			
8X-1546	4	Screw, Condenser Mtg. & Lead Fill. Hd. #6-32x5/32			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			

* Use as Required.

† See Manual Bulletin IG-11.

Unit	Plate Assy.	Plate, Breaker	Spring Set	Spring
IAP-4002-1	IAP-3004RA	IAP-1004RA (Mrkd. 7 †)	IGB-292SS	VC-73
IAP-4002A-1	IAP-3004RC	IAP-1004RC (Mrkd. 6 †)	IGB-292SS	VC-50
IAP-4002B-1	IAP-3004RD	IAP-3004RD (Mrkd. 9 †)	IG-636QS	VC-45

UNIT	APPLICATION
IAP-4002-1	Dodge (Truck), Dodge, Plymouth
IAP-4002A-1	DeSoto
IAP-4002B-1	Chrysler (6)

(Issued 11-14-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAP-4101-1,A-1 DISTRIBUTOR PARTS LIST

IAP-4101-1,A-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-17	1	Ring, Lock
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-18	2	Clamp, Bearing, Sub Plate
IAO-1003	1	Cap Assy., Dist.	IGS-19S	1	Collar, Shaft
IAO-7	1	Contact, Plunger	IGS-99	1	Spacer, Cam
IAO-20	1	Spring, Contact	IGS-114	1	Arm, Advance
IAP-7	1	Gasket, Bracket to Base	IGS-1016B	1	Rotor
IAP-23	1	Bracket, Vacuum Chamber	**	1	Cam & Stop, Plate, 6 Cyl. R.H.
IAP-24	1	Gasket, Vacuum Chamber To Bracket	IGS-1113R	1	Shaft, Drive
IAP-2012	1	Base Assy., Dist.	SW-213	1	Rivet, Collar, Drive Shaft
IAD-14	1	Bracket, Cap Spring	SW-634	1	Washer, Plain, Advance Arm Screw
IAO-13	2	Bracket, Breaker Plate Mtg.	VC-14	1	Gasket, 1/32" Thick
IAO-14	1	Bracket, Cap Spring	VC-15	1	Plug
IAP-9	2	Cap Spring	VC-46	*	Washer .032" Thick
IG-579A	2	Bearing, Abs. Bronze	VC-46A	*	Washer .010" Thick
IGS-117	1	Wick, Felt	VC-46B	*	Washer .065" Thick
X-525	4	Rivet, Tubular	**	1	Spring
X-1590	1	Oiler	VC-3147	1	Vacuum Chamber
**	1	Plate Assy., Breaker	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IA-131	1	Clip, Spring, Contact Arm	8X-321	2	Screw, Vacuum Chamber Mtg., Rd. Hd. #10-32x5/16
**	1	Plate, Breaker	8X-902	4	Screw, Vac. Bracket & Breaker Plate Mtg., Fill. Hd. #10-32x3/8
IG-3927G	1	Condenser	X-1270	2	Washer, Vac. Bracket Mtg., Skpf. #10
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	12X-196	4	Lockwasher, Vacuum Chamber & Breaker Plate Mtg. Sc. #10
IGE-15	1	Washer, Plain, Clamp Sc., #6	12X-199	1	Lockwasher, Advance Arm 1/4
IGP-3028ES	1	Contact Set, Breaker			
IGS-89	1	Lead Assy.			
IGS-181	1	Lead Assy.			
IGS-1092RS	1	Plate Assy., Sub, Breaker			
8X-350	1	Washer, Plain, Contact Lock Sc., #8			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
12X-194	4	Lockwasher, Cond. Mtg. & Lead Sc., #6			
8X-1546	4	Screw, Cond. Mtg. & Lead, Fill. Hd. #6-32x5/32			
IAR-8	1	Cover, Terminal Slot			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
**	1	Spring Set, Gov. Weight			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			

* Use as required.

** See table following parts list for part number applying to assembly wanted.

UNIT	APPLICATION
IAP-4101-1	Plymouth
IAP-4101A-1	Dodge

Assembly No	Spring Set	Cam	Spring	Plate Assembly	Breaker Plate
IAP-4101-1	IGB-292SS	IGS-1100RW	VC-49	IAP-3004R (Identified by 10)	IAP-1004R
IAP-4101A-1	IG-636HS	IGS-1100RX	VC-50	IAP-3004RB (Identified by 8.5)	IAP-1004RB

(Issued 10-21-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAP-4102-1,A-1,B-1,C-1 DISTRIBUTOR PARTS LIST

IAP-4102-1,
A-1,B-1,C-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-114	1	Arm, Advance
IAO-1003	1	CAP ASSY., DIST.	IGS-115	1	Pointer, Advance Arm
IAO-7	1	Contact Plunger	IGS-1016B	1	ROTOR
IAO-20	1	Spring, Contact	**	1	Cam & Stop Plate, 6 Cyl. R.H.
IAP-7	1	Gasket, Bracket to Base	IGS-1112R	1	Shaft, Drive
IAP-23	1	Bracket, Vacuum Chamber	SW-213	1	Rivet, Collar
IAP-24	1	Gasket, Vacuum Chamber to Bracket	SW-634	1	Washer, Plain, Adv. Arm Mtg. Screw
IAP-2012	1	Base Assy., Dist.	VC-14	1	Gasket, 1/32" Thick
IAD-14	1	Bracket, Cap Spring	VC-15	1	Plug
IAO-13	2	Bracket, Breaker Plate Mtg.	VC-46	*	Washer, .032" Thick
IAO-14	1	Bracket, Cap Spring	VC-46A	*	Washer, .010" Thick
IAP-9	2	Cap Spring	VC-46B	*	Washer, .065" Thick
IG-579A	2	Bearing, Abs. Bronze	**	1	Spring
IGS-117	1	Wick, Felt	VC-3147	1	VACUUM CHAMBER
X-525	4	Rivet, Tubular	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
X-1590	1	Oiler	12X-199	1	Washer, Advance Arm, Skpf. 1/4
**	1	Plate Assy., Breaker	12X-196	4	Lockwasher, Vac. Chamber Mtg. Sc. #10
IA-131	1	Clip, Spring, Contact Arm	8X-321	2	Screw, Vacuum Chamber Mtg., Rd. Hd. #10-32x5/16
**	1	Plate, Breaker	8X-902	4	Screw, Vac. Bracket & Breaker Plate Mtg., Fill. Hd. #10-32x3/8
IG-3927G	1	CONDENSER	X-1270	2	Washer, Breaker Plate Mtg. Sc. Skpf. #10
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGE-15	1	Washer, Plain, Clamp Sc. #6			
IGP-3028ES	1	CONTACT SET, BREAKER			
IGS-89	1	Lead Assy.			
IGS-181	1	Lead Assy.			
IGS-1092RS	1	Plate Assy., Sub, Breaker			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-884	1	Screw, Lock Breaker Contact, Fill. Hd. #8-32x3/16			
12X-194	4	Lockwasher, Condenser Mtg. & Lead Screw, #6			
8X-1546	4	Screw, Condenser Mtg. & Lead, Fill. Hd. #6-32x5/32			
IAR-8	1	Cover, Terminal Slot			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
**	1	Spring Set, Gov. Weight			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-17	1	Ring, Lock			
IGS-18	2	Clamp, Bearing, Sub Plate			
IGS-19S	1	Collar, Shaft			

* Use as required.

** See table following list for part number applying to assembly wanted.

(Continued on Reverse Side)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAP-4102-1,A-1,B-1,C-1 DISTRIBUTOR PARTS (Continued)

Assembly No.	Plate Assy.	Breaker Plate	Spring Set	Cam	Spring
IAP-4102-1	IAP-3004RA	IAP-1004RA (Mrkd. 7)	IGB-292SS	IGS-1100RA	VC-73
IAP-4102A-1	IAP-3004RC	IAP-1004RC (Mrkd. 6)	IG-636NS	IGS-1100R	VC-50
IAP-4102B-1	IAP-3004RD	IAP-1004RD (Mrkd. 9)	IG-636QS	IGS-1100RA	VC-45
IAP-4102C-1	IAP-3004RD	IAP-1004RD (Mrkd. 9)	IGB-353BS	IGS-1100RX	VC-45

UNIT	APPLICATION
IAP-4102-1	DeSoto (Export) (Canada) Fargo(Truck), Dodge (Truck),Plymouth, Dodge
IAP-4102A-1	(Canada) DeSoto
IAP-4102B-1	(Canada) Chrysler (6)
IAP-4102C-1	Chrysler (6), DeSoto

(Issued 11-15-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAP-4103-1,A-1 DISTRIBUTOR PARTS LIST

IAP-4103-1,A-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
I AO-10	1	Washer, Thrust, Drive Shaft, Upper	**	1	Spring Set, Gov. Weight
I AO-11	1	Washer, Thrust, Drive Shaft, Upper	IGH-28	1	Wick, Felt, Cam Sleeve
I AO-1003	1	CAP ASSY., DIST.	IGS-17	1	Ring, Lock
I AO-7	1	Contact, Plunger	IGS-18	2	Clamp, Bearing, Sub Plate
I AO-20	1	Spring, Contact	IGS-19S	1	Collar, Shaft
I AP-7	1	Gasket, Bracket to Base	IGS-99	1	Spacer, Cam
I AP-23	1	Bracket, Vacuum Chamber	IGS-114	1	Arm, Advance
I AP-24	1	Gasket, Vacuum Chamber to Bracket	IGS-1016B	1	ROTOR
I AP-2012	1	Base Assy., Dist.	**	1	Cam & Stop Plate, 6 Cyl. R.H.
I AD-14	1	Bracket, Cap Spring	IGS-1113R	1	Shaft, Drive
I AO-13	2	Bracket, Breaker Plate Mtg.	SW-213	1	Rivet, Collar
I AO-14	1	Bracket, Cap Spring	SW-634	1	Washer, Plain, Advance Arm Mtg. Sc.
I AP-9	2	Cap Spring	VC-14	1	Gasket, 1/32" Thick
IG-579A	2	Bearing, Abs. Bronze	VC-15	1	Plug
IGS-117	1	Wick, Felt	VC-46	*	Washer, .032" Thick
X-525	4	Rivet, Tubular	VC-46A	*	Washer, .010" Thick
X-1590	1	Oiler	VC-46B	*	Washer, .065" Thick
**	1	Plate Assy., Breaker	*	1	Spring
I A-131	1	Clip, Spring, Contact Arm	VC-3147	1	VACUUM CHAMBER
**	1	Plate, Breaker	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IG-3927G	1	CONDENSER	12X-196	4	Lockwasher, Vac. Chamber Mtg. Sc., #10
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	12X-199	1	Lockwasher, Advance Arm, 1/4
I GE-15	1	Washer, Plain, Clamp Sc., #6	8X-321	2	Screw, Vacuum Chamber Mtg., Rd. Hd. #10-32x5/16
IGP-3028ES	1	CONTACT SET, BREAKER	8X-902	4	Screw, Vac. Bracket & Breaker Plate Mtg., Fill. Hd. #10-32x3/8
IGS-89	1	Lead Assy.	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IGS-181	1	Lead Assy.			
IGS-1092RS	1	Plate Assy., Sub. Breaker			
8X-350	1	Washer, Plain, Contact Lock Sc., #8			
8X-884	1	Screw, Lock, Breaker Cont., Fill. Hd. #8-32x3/16			
12X-194	4	Lockwasher, Cond. Mtg. & Lead Sc., #6			
8X-1546	4	Screw, Cond. Mtg. & Lead, Fill. Hd. #6-32x5/32			
I AR-8	1	Cover, Terminal Slot			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

* Used as required.
 ** See table following parts list for part numbers applying to assembly wanted.

UNIT	APPLICATION
IAP-4103-1	Plymouth
IAP-4103A-1	Dodge, Plymouth

Assembly No.	Plate Assy.	Breaker Plate	Spring Set	Cam & Stop Plate	Spring
IAP-4103-1	IAP-3004R	IAP-1004R (Marked 10)	IGB-292SS	IGS-1100RW	VC-49 (Blue)
IAP-4103A-1	IAP-3004RE	IAP-1004RE (Marked 8)	IGB-353BS	IGS-1100RX	VC-119 (Cad. Pl.)

(Issued 11-18-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAR-4101-1,A-1 DISTRIBUTOR PARTS LIST

IAR-4101-1,A-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGP-1016B	1	ROTOR
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IGS-17	1	Ring, Lock
IAP-7	1	Gasket, Bracket to Base	IGS-99	1	Spacer, Cam
IAP-24	1	Gasket, Vacuum Chamber to Bracket	IGS-114	1	Arm, Advance
IAR-8	1	Cover, Terminal Slot	IGS-115	1	Pointer, Advance Arm
IAR-23	1	Bracket, Vacuum Chamber	IGT-18	2	Clamp, Bearing, Sub Plate
IAR-1003	1	CAP ASSY., DIST.	IGT-70	1	Spring, Anti-Rattle
IAO-7	1	Contact, Plunger	**	1	Cam & Stop Plate, 8 Cyl. R.H.
IAO-20	1	Spring, Contact	IGT-1072R	1	Shaft, Drive
IAR-2001	1	Base Assy., Dist.	SW-213	1	Rivet, Collar, Drive Shaft
IAD-14	1	Bracket, Cap Spring	SW-634	1	Washer, Plain, Advance Arm Mtg. Screw
IAO-14	1	Bracket, Cap Spring	VC-14	1	Gasket 1/32" Thick
IAP-9	2	Spring, Cap	VC-15	1	Plug
IAR-9	2	Bracket, Brkr. Plate Mtg.	VC-46	*	Washer, .032" Thick
IG-579A	2	Bearing, Abs. Bronze	VC-46A	*	Washer, .010" Thick
IGS-117	1	Wick, Felt	VC-46B	*	Washer, .065" Thick
X-525	4	Rivet, Tubular	VC-77	1	Spring
X-1590	1	Oiler, Press in Elbow, 1/4	VC-3147	1	VACUUM CHAMBER
IAR-3004R	1	Plate Assy., Breaker Identified by 8	8X-86	1	Screw Advance Arm Hex. Hd. 1/4-20x5/8
IA-131	1	Clip, Spring, Contact Arm	12X-196	4	Lockwasher, Vac. Chamber & Breaker Plate Mtg. Sc. #10
IAR-1004R	1	Plate, Breaker	12X-199	1	Lockwasher, Advance Arm, 1/4
IG-3927F	1	CONDENSER	8X-321	2	Screw, Vacuum Chamber Mtg. Rd. Hd. #10-32x5/16
IGE-15	1	WASHER, Plain, CLAMP SC., #6	8X-902	4	Screw, Vacuum Bracket & Breaker Plate Mtg., Fill. Hd. #10-32x3/8
IGP-3028GS	1	CONTACT SET, BREAKER	X-1270	2	Washer, Vac. Bracket Mtg., Skpf.
IGS-52	1	Clip, Lead			
IGT-11A	1	Lead Assy.			
IGT-1048RS	1	Plate Assy., Sub, Breaker			
IGT-52	1	Lead Assy.			
8X-59	2	Screw, Contact Lock & Lead Rd. Hd. #8-32x3/16			
12X-195	1	Lockwasher, Lead Sc. #8			
8X-350	1	Washer, Plain, Contact Lock Sc., #8			
8X-323	1	Screw, Spring, Clamp, Rd. Hd. #6-32x5/16			
X-194	3	Lockwasher, Condenser & Lead Sc., #6			
8X-1546	3	Screw, Cond. Mtg. & Lead Fill. Hd. #6-32x5/32			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGB-199	1	Collar, Shaft, Dist.			
**	1	Spring Set, Gov. Weight			
IGH-28	1	Wick, Felt, Cam Sleeve			

	Unit	Spring Set	Cam & Stop Plate
	IAR-4101-1	IGB-208CS	IGT-1021RN
	IAR-4101A-1	IGB-292SS	IGT-1021R

UNIT	APPLICATION
IAR-4101-1	
IAR-4101A-1	Chrysler (8)

* Use as required.

** See table following parts list for part number applying to assembly wanted.

(Issued 10-20-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4000 SERIES DISTRIBUTOR PARTS LIST

IAT-4000 Series
(Issued 4-5-56)

Model No.	No. Cyl.	CUSTOMER
IAT-4001	6	Studebaker
IAT-4002	6	Hudson
IAT-4003	6	Dodge, Plymouth
IAT-4003A	6	Dodge Truck
IAT-4003B	6	Plymouth (Export)
IAT-4004	6	Chrysler, DeSoto
IAT-4004A	6	Dodge, Plymouth (Canada)
IAT-4004B	6	DeSoto (Canada)
IAT-4004C	6	Chrysler (Canada)
IAT-4005	6	Nash (Canada)
IAT-4006	4	Aktiebolaget Volvo (Export)
IAT-4007	6	Willys, Henry J., Allstate
IAT-4007A	6	Willys
IAT-4008	4	Willys
IAT-4008A	4	Henry J., Allstate
IAT-4008B	4	Willys
IAT-4009	6	Hudson
IAT-4009A	6	Hudson
IAT-4009B	6	Hudson
IAT-4010	6	Studebaker
IAT-4011	6	Dodge, Plymouth
IAT-4011A	6	Dodge Truck
IAT-4011B	6	Plymouth (Export)
IAT-4012	6	Chrysler, DeSoto
IAT-4012A	6	Dodge, Plymouth (Canada)
IAT-4012B	6	DeSoto (Canada)
IAT-4012C	6	Chrysler (Canada)
IAT-4012D	6	Dodge, Plymouth (Canada)
IAT-4013	6	Nash (Canada)
IAT-4014	6	Plymouth
IAT-4015	6	Nash (Canada)
IAT-4016	6	Hudson
IAT-4017	6	Willys
IAT-4017A	6	Willys
IAT-4018	6	Aktiebolaget Volvo (Export)
IAT-4019	6	Willys

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

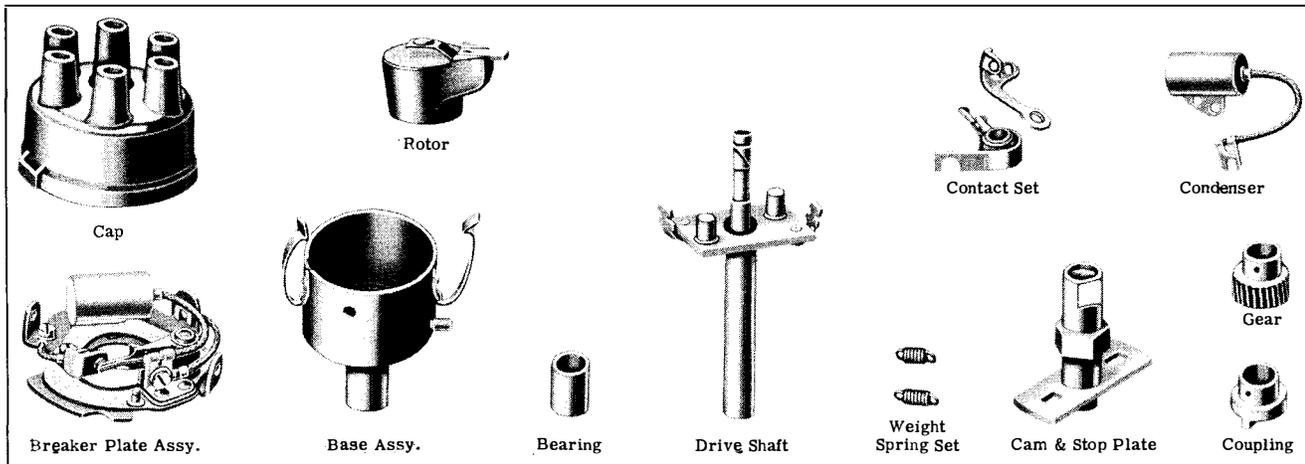






ILLUSTRATION SHOWS TYPICAL PARTS ONLY

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IAT-4001	IAT-1003	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2001	IG-579A	IAT-1002L	IGB-337S	IGS-1100LAB	- - -
IAT-4002	IAT-1003	IAT-1016	IGW-3028BS	IAT-3076R	IAT-2004R	IAT-2032	IG-579A	IGS-1183RA	IG-636XS	IGS-1100RAJ	- - -
IAT-4003	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1113RB	IGB-353BS	IGS-1100RAJ	- - -
IAT-4003A	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1113RB	IGB-292SS	IGS-1100RAD	- - -
IAT-4003B	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1113RB	IGB-292SS	IGS-1100RAD	- - -
IAT-4004	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RB	IGB-353BS	IGS-1100RAJ	- - -
IAT-4004A	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RB	IGB-292SS	IGS-1100RAM	- - -
IAT-4004B	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RB	IG-636NS	IGS-1100RL	- - -
IAT-4004C	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RB	IG-636QS	IGS-1100RAM	- - -
IAT-4005	IAT-1003	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2038	IG-579A	IGS-1203L	IGB-327FS	IGS-1100LAC	- - -
IAT-4006	IAT-1041	IAT-1016	IGW-3028BS	IAT-3076R	IAT-2004R	IAT-2040	IG-579A	IGS-1053RC	IGC-42KS	IGC-1132RL	IG-644A
IAT-4007	IAT-1003	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2046	IG-579A	IGS-1206L	IGB-336BS	IGS-1100LAD	- - -
IAT-4007A	IAT-1003	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2046A	IG-579A	IGS-1206LA	IGE-24S	IGS-1100LAF	- - -
IAT-4008	IAT-1041	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2046	IG-579A	IGS-1134LB	IGB-358BS	IGC-1132LD	- - -
IAT-4008A	IAT-1041	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2046A	IG-579A	IGS-1134LB	IGC-78S	IGC-1132LD	- - -
IAT-4008B	IAT-1041	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2046	IG-579A	IGS-1134LB	IGC-119S	IGC-1132LD	- - -
IAT-4009	IAT-1033	IAT-1016A	IGW-3028BS	IAT-3076R	IAT-2004R	IAT-2045	IG-579A	IGS-1183RB	IG-636XS	IGS-1100RAJ	- - -
IAT-4009A	IAT-1033	IAT-1016A	IGW-3028BS	IAT-3076R	IAT-2004R	IAT-2045A	IG-579A	IGS-1183RB	IGB-339S	IGS-1100RAD	- - -
IAT-4009B	IAT-1033	IAT-1016A	IGW-3028BS	IAT-3076R	IAT-2004R	IAT-2045B	IG-579A	IGS-1183RB	IGB-339S	IGS-1100RAD	- - -
IAT-4010	IAT-1033	IAU-1016A	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2001	IG-579A	IAT-1002L	IGB-337S	IGS-1100LAB	- - -
IAT-4011	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1113RD	IGB-353BS	IGS-1100RAJ	- - -
IAT-4011A	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1113RD	IGB-292SS	IGS-1100RAD	- - -
IAT-4011B	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1113RD	IGB-292SS	IGS-1100RAD	- - -
IAT-4012	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RD	IGB-353BS	IGS-1100RAJ	- - -
IAT-4012A	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RD	IGB-292SS	IGS-1100RAM	- - -
IAT-4012B	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RD	IG-636NS	IGS-1100RL	- - -
IAT-4012C	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1112RD	IG-636QS	IGS-1100RAM	- - -
IAT-4012D	IAT-1033	IAU-1016A	IGW-3028BS	IAT-2015RA	IAT-2004RD	IAT-2035	IG-579A	IGS-1112RD	IGB-208CS	IGS-1100RAJ	- - -
IAT-4013	IAT-1003	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2038	IG-579A	IGS-1203L	IGB-327FS	IGS-1100LAC	- - -
IAT-4014	IAT-1033	IAU-1016A	IGW-3028BS	IAT-3076RA	IAT-2004RA	IAT-2035	IG-579A	IGS-1113RD	IGB-353BS	IGS-1100R-4	- - -
IAT-4015	IAT-1003	IAT-1016	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2038	IG-579A	IAT-1054L	IGB-327FS	IGS-1100LAC	- - -
IAT-4016	IAT-1033	IAT-1016A	IGW-3028BS	IAT-3076R	IAT-2004R	IAT-2045	IG-579A	IGS-1212R	IGB-328PS	IGS-1100RT	- - -
IAT-4017	IAT-1033	IAU-1016A	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2046	IG-579A	IGS-1206LB	IGB-336BS	IGS-1100LAD	- - -
IAT-4017A	IAT-1033	IAU-1016A	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2046A	IG-579A	IGS-1206LC	IGE-24S	IGS-1100LAF	- - -
IAT-4018	IAT-1033	IAT-1016A	IGW-3028BS	IAT-3076R	IAT-2004R	IAT-2045C	IG-579A	IAT-1056R	IGB-329AS	IGS-1100RAW	IG-644A
IAT-4019	IAT-1033	IAT-1016A	IGW-3028AS	IAT-3076L	IAT-2004L	IAT-2058	IG-579A	IGS-1053LE	IGB-358CS	IGS-1100LAH	IG-644A


ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
	ARM, ADVANCE	IAT-20	1 IAT-4001, IAT-4010
		IAT-39	1 IAT-4005, IAT-4013, IAT-4015
		IAT-42	1 IAT-4006, IAT-4018
		IAT-43	1 IAT-4007, A, IAT-4017, A
		IAT-44	1 IAT-4008, A, B
		IGS-114	1 IAT-4002 Thru IAT-4004C, IAT-4009, A, B, IAT-4011, A, B, IAT-4012, A, B, C, D, IAT-4014, IAT-4016 IAT-4019
		IGS-169	1 IAT-4019
	BUSHING INSULATING TERMINAL STUD	IAT-7	1 All
	COLLARS		
	(A) Dist. Shaft	IGB-199	1 IAT-4001, IAT-4007, A, IAT-4008, A, B, IAT-4010, IAT-4017, A
	(B) Dist. Shaft	IGS-19S	1 IAT-4002 Thru IAT-4005, IAT-4009, A, B, IAT-4011 Thru IAT-4016
	CONTACT, DIST. CAP PLUNGER	IAO-7	1 IAT-4003 Thru IAT-4004C, IAT-4009, A, B, IAT-4010, IAT-4011, A, B, IAT-4012, A, B, C, D, IAT-4014, IAT-4016, IAT-4017, A, IAT-4018, IAT-4019
	GASKET		
	(A) Vacuum Chamber (1/32" Thick)	IAT-30	1 IAT-4001, IAT-4005, IAT-4007, A, IAT-4008, A, B, IAT-4009 Thru IAT-4017A, IAT-4019
	(B) Vacuum Chamber (1/32" Thick)	VC-14	1 IAT-4002 Thru IAT-4004C, IAT-4006, IAT-4018
	HOUSING, TERMINAL	XA-772	1 IAT-4001, IAT-4010
	INSULATION, TERMINAL STUD (Inner)	IAT-6	1 All
	LEADS		
	(A) Ground, Breaker Plate	IAT-14	1 All
	(B) Primary, Breaker Plate	IAT-24L	1 IAT-4001, IAT-4005, IAT-4007, A, IAT-4008, A, B, IAT-4010 IAT-4013, IAT-4015, IAT-4017, A, IAT-4019
	(C) Primary, Breaker Plate	IAT-24R	1 IAT-4002 Thru IAT-4004C, IAT-4006, IAT-4009, A, B, IAT-4011 Thru IAT-4012D, IAT-4014, IAT-4016, IAT-4018
	LOCKWASHERS		
	(A) Arm, Advance (1/4)	12X-199	1 All
	(C) Breaker Plate Sc., & Lead Assy. #8	12X-195	3 All
	(D) Condenser Mtg. (#6)	12X-194	1 All
	(B) Stud, Terminal (#10)	12X-196	2 All
	NUTS		
	Term. Stud (Hex. #10-32)	8X-173	2 All
	OILERS		
	Elbow	X-1590	1 All
	"O" RING	XA-744W	1 IAT-4007, A, IAT-4008, A, B, IAT-4017, A
	PLATE, BREAKER		
		IAT-2004LS	1 IAT-4001, IAT-4005, IAT-4007, A, IAT-4008, A, B, IAT-4010, IAT-4013, IAT-4015, IAT-4017, A, IAT-4019
		IAT-2004RS	1 IAT-4002 Thru IAT-4004C, IAT-4006, IAT-4009, A, B, IAT-4011 Thru IAT-4012C, IAT-4014, IAT-4016, IAT-4018 IAT-4012D
	IAT-2004RCS	1 IAT-4012D	
	PLUGS		
	(A) Vacuum Chamber	IAT-29	1 IAT-4001, IAT-4005, IAT-4007 Thru IAT-4012D, IAT-4017A, IAT-4019
	(B) Vacuum Chamber	VC-15	1 IAT-4002 Thru IAT-4004C, IAT-4006, IAT-4018
	POINTER, ADVANCE ARM	IGS-115	1 IAT-4002, IAT-4009, A, B, IAT-4016
	RETAINER, OIL SEAL	IGW-179	1 IAT-4005, IAT-4013, IAT-4015
	RINGS		
	(A) Lock	IGS-17	1 All
	(B) Snap, Cam Retaining	IG-680	1 All
	RIVETS		
	Collar or Coupling	SW-213	1 All
	SCREWS		
	(B) Advance Arm (Hex. Hd. 1/4-20x5/8)	8X-86	1 All
	(C) Breaker Plate Mtg. (Rd. Hd. #8-32x5/16)	8X-304	2 All
	(A) Clamp Spring (#6-32x3/16)	IGC-175A	1 All
	(D) Condenser Mtg. (#6-32x5/32)	8X-1546	1 All
	(D) Contact Lead (Fill Hd. #8-32x3/16)	8X-884	1 All
	(D) Contact Lead (Fill. Hd. #8-32x1/4)	8X-3027	1 All
	(D) Vacuum Chamber Mtg. (Fill. Hd. #10-32x1/4)	8X-872	2 All
	SEAL, OIL	XA-724	1 IAT-4005, IAT-4013, IAT-4015
	SPACERS		
	(A) Cam	IGS-99	1 All
	(B) Vacuum Chamber Spring	VC-164	1 IAT-4009A
	(B) Vacuum Chamber Spring	IAT-49	1 IAT-4009B

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Continued)

Name	Part No.	No. Used	Used On	
 A  B  C  D	SPRINGS			
	(A) Anti-Rattle	IGT-69	1	IAT-4001, IAT-4005, IAT-4008, A, B, IAT-4010, IAT-4013, IAT-4015, IAT-4019
	(A) Anti-Rattle	IGT-70	1	IAT-4006, IAT-4012D, IAT-4016, IAT-4018
	(C) Contact, Dist. Cap	IAO-20	1	IAT-4003 Thru IAT-4004C, IAT-4009 Thru IAT-4012C, IAT-4014, IAT-4016, IAT-4017, A, IAT-4018, IAT-4019
	(D) Friction Spring	IAT-55	1	IAT-4007, A, IAT-4008, A, B, IAT-4017, A
	(B) Vacuum Chamber	VC-45	1	IAT-4003, B, IAT-4008A, IAT-4011, B, IAT-4014, IAT-4015, IAT-4018
	(B) Vacuum Chamber	VC-49	1	IAT-4001, IAT-4003A, IAT-4010, IAT-4011A
	(B) Vacuum Chamber	VC-55	1	IAT-4008, IAT-4019
	(B) Vacuum Chamber	VC-73	1	IAT-4004A, B, IAT-4012A, B
	(B) Vacuum Chamber	VC-76	1	IAT-4004, C, IAT-4012, C
	(B) Vacuum Chamber	VC-77	1	IAT-4005, IAT-4006, IAT-4007A, IAT-4008B, IAT-4013, IAT-4017A
	(B) Vacuum Chamber	VC-92	1	IAT-4007, IAT-4017
	(B) Vacuum Chamber	VC-156	1	IAT-4002, IAT-4009
	(B) Vacuum Chamber	VC-144	1	IAT-4009A, B
	(B) Vacuum Chamber	IAT-149	1	IAT-4016
	SPRING & HINGE, CLAMP CAP	IGB-1007	2	All
 A  B	TERMINALS			
	(A) Terminal	X-3012	1	All
(B) Terminal	XA-773	1	IAT-4001, IAT-4010	
	VACUUM CHAMBER			
	IAT-2023LD	1	IAT-4008, IAT-4019	
	IAT-2023LE	1	IAT-4007, A, IAT-4008B, IAT-4017, A	
	IAT-2023LJ	1	IAT-4001, IAT-4010	
	IAT-2023LK	1	IAT-4008A	
	IAT-2023LL	1	IAT-4015	
	IAT-2023LM	1	IAT-4005, IAT-4013	
	IAT-2023RD	1	IAT-4002, IAT-4009	
	IAT-2023RE	1	IAT-4004B, IAT-4012B	
	IAT-2023RF	1	IAT-4004A, IAT-4012A	
	IAT-2023RG	1	IAT-4003, B, IAT-4011, B, IAT-4014	
	IAT-2023RJ	1	IAT-4004, C, IAT-4012, C	
	IAT-2023RK	1	IAT-4003A, IAT-4011A, IAT-4012D, IAT-4018	
	IAT-2023RM	1	IAT-4006, IAT-4016	
	IAT-2023RN	1	IAT-4009A, B	
	WASHERS			
	(C) Advance Arm Mtg. Sc. Plain	SW-634	1	All Except IAT-4007, A
	(A) Contact Lead	SSB-38	1	All
	(F) Insulating, Terminal Stud	IGL-9A	1	All
	(A) Spring, Clamp Screw (Plain #6)	IGE-15	1	All
	(H) Terminal Stud (Plain #10)	8X-183A	1	All
	(G) Thrust, Inner, Drive Shaft (Upper)	IAO-10	1	All
	(G) Thrust, Outer, Drive Shaft (Upper)	IAO-11	1	All
	(J) Thrust, Drive Shaft (Lower)	IG-90	1	All Except IAT-4005 & IAT-4013
	(J) Thrust, Drive Shaft (Lower)	IG-90A	1	IAT-4006, IAT-4018
	(E) Thrust, Drive Shaft (Lower)	IG-313	1	IAT-4005, IAT-4013, IAT-4015
	(B) Vacuum Chamber (.032" Thick)	VC-46	*	All
	(B) Vacuum Chamber (.010" Thick)	VC-46A	*	All
(B) Vacuum Chamber (.065" Thick)	VC-46B	*	All	
(D) Vacuum Chamber Mtg. (Skpf. #10)	X-1270	2	All	
	WEIGHT, GOVERNOR			
	IG-1456	2	IAT-4002 Thru IAT-4004C, IAT-4006	
	IG-2456	2	IAT-4005, IAT-4007, A, IAT-4008, A, B, IAT-4013, IAT-4015	
	IGC-2168L	2	IAT-4001, IAT-4010, IAT-4017, A, IAT-4019	
IGC-2168R	2	IAT-4009, A, B, IAT-4011 Thru IAT-4012C, D, IAT-4014, IAT-4016, IAT-4018		
 A  B	WICKS			
	(B) Felt, Cam Sleeve	IGH-28	1	All
	(A) Felt, Oiler	IGS-117	1	IAT-4001, IAT-4002, IAT-4005 Thru IAT-4010, IAT-4013, IAT-4015, IAT-4016, IAT-4017, A, IAT-4018
(A) Felt, Oiler	IGT-117	1	IAT-4003, Thru IAT-4004C, IAT-4011 Thru IAT-4012D, IAT-4014, IAT-4019	

* USE AS REQUIRED.

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4101, A, B, C DISTRIBUTOR PARTS LIST

IAT-4101, A, B, C
(Issued 10-15-53)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
I AO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	SW-213	1	Rivet, Collar
I AO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	SW-634	1	Washer, Plain, Advance Arm Mtg. Screw
I AT-29	1	Plug, Vacuum Chamber	**	1	Spring, Vacuum Chamber
I AT-30	1	Gasket, Vacuum Plug, 1/32" Thick	VC-46	*	Washer, Vacuum Chamber .032" Thick
I AT-52	1	Cover, Terminal Slot	VC-46A	*	Washer, Vacuum Chamber .010" Thick
I AT-1033	1	CAP ASSY., DISTRIBUTOR	VC-46B	*	Washer, Vacuum Chamber .065" Thick
I AO-7	1	Contact, Plunger	3X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
I AO-20	1	Spring, Contact	12X-195	2	Lockwasher, Breaker Plate Sc., #8
I AT-2023RG	1	VACUUM CHAMBER	12X-199	1	Lockwasher, Advance Arm, 1/4
I AT-2035A	1	Base Assy., Distributor	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
IG-579A	2	Bearing, Abs. Bronze	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
I AT-2050R	1	Plate Assy., Breaker	X-1270	2	Washer, Vac. Chamber Mtg., Sc., Skpf. #10
I AT-51	1	Lead Assy., Primary	X-1590	1	Oiler
I AT-2050RS	1	Plate, Breaker			
I AT-3076RA	1	CONDENSER			
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16			
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6			
IGW-3028BS	1	CONTACT SET, BREAKER			
SSB-38	1	Washer, Plain, Contact Lock Screw, #8			
12X-194	2	Lockwasher, Condenser Mtg. & Lead Screw, #6			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
8X-1546	2	Screw, Condenser Mtg. & Lead, Fill. Hd. #6-32x5/32			
I AU-1016A	1	ROTOR			
IG-90	1	Washer, Thrust, Drive Shaft Lower			
IG-680	1	Snap Ring, Cam Retaining			
**	1	Spring Set, Gov. Weight			
IGB-1007	2	Spring & Hinge, Clamp, Cap			
IGC-2168R	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-17	1	Ring, Lock			
IGS-19S	1	Collar, Shaft			
IGS-99	1	Spacer, Cam			
IGS-114	1	Arm, Advance			
**	1	Cam & Stop Plate, 6 Cyl. R. H.			
IGS-1113RD	1	Shaft, Drive			
IGT-117	1	Wick, Felt			

	* Used as required.	
	** See table following parts lists for part number applying to assembly wanted.	

Assembly No.	Cam & Stop Plate	Spring Set, Gov. Weight
I AT-4101	IGS-1100RAJ	IGB-353BS
I AT-4101A	IGS-1100RAD	IGB-292SS
I AT-4101B	IGS-1100RQ	IG-913S
I AT-4101C	IGS-1100RAD	IGB-353BS

UNIT	APPLICATION
I AT-4101	Dodge (6), Plymouth
I AT-4101A	Dodge (6) (Export), Plymouth (Export)
I AT-4101B	Dodge (6)
I AT-4101C	Chrys. Ind., Dodge Tr.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4102 DISTRIBUTOR PARTS LIST

IAT-4102
(Issued 10-8-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGS-1100RAJ	1	Cam & Stop Plate, 6 Cyl. R.H.
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGS-1112RD	1	Shaft, Drive
IAT-29	1	Plug, Vacuum Chamber	IGT-117	1	Wick, Felt
IAT-30	1	Gasket, Vac. Plug, 1/32" Thick	SW-213	1	Rivet, Collar
IAT-52	1	Cover, Terminal Slot	SW-634	1	Washer, Plain, Advance Arm Mtg. Sc.
IAT-1033	1	CAP ASSY., DIST.	VC-46	*	Washer, Vacuum Chamber .032" Thick
IAO-7	1	Contact, Plunger	VC-46A	*	Washer, Vacuum Chamber .010" Thick
IAO-20	1	Spring, Contact	VC-46B	*	Washer, Vacuum Chamber .065" Thick
IAT-2023RJ	1	VACUUM CHAMBER	VC-76	1	Spring
IAT-2035A	1	Base Assy., Dist.	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IG-579A	2	Bearing, Abs. Bronze	12X-195	2	Lockwasher, Breaker Plate Sc., #8
IAT-2050R	1	Plate Assy., Breaker	12X-199	1	Lockwasher, Advance Arm, 1/4
IAT-51	1	Lead Assy., Primary	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
IAT-2050RS	1	Plate, Breaker	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
IAT-3076RA	1	CONDENSER	X-1270	2	Washer, Vac. Chamber Mtg. Sc., Skpf. #10
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	X-1590	1	Oiler
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6			
IGW-3028BS	1	CONTACT SET, BREAKER			
SSB-38	1	Washer, Plain, Contact Lock Sc., #8			
12X-194	2	Lockwasher, Condenser Mtg. & Lead Sc., #6			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
8X-1546	2	Screw, Condenser Mtg. & Lead, Fill. Hd. #6-32x5/32			
IAU-1016A	1	ROTOR			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IGB-353BS	1	Spring Set, Gov. Weight			
IGB-1007	2	Spring & Hinge, Clamp, Cap			
IGC-2168R	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-17	1	Ring, Lock			
IGS-19S	1	Collar, Shaft			
IGS-99	1	Spacer, Cam			
IGS-114	1	Arm, Advance			

* Use as required.

UNIT	APPLICATION
IAT-4102	Chrysler (6), De Soto (6)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4103 DISTRIBUTOR PARTS LIST

IAT-4103
(Issued 3-27-56)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGS-114	1	Arm, Advance
IAT-29	1	Plug, Vacuum Chamber	IGS-1100RQ	1	Cam & Stop Plate, 6 Cyl. R. H.
IAT-30	1	Gasket, Vacuum Plug, 1/32" Thick	IGS-1113RD	1	Shaft, Drive
IAT-52	1	Cover, Terminal Slot	IGT-117	1	Wick, Felt
IAT-1033	1	CAP ASSY., DIST.	SW-634	1	Washer, Plain, Advance Arm Mtg. Sc.
IAO-7	1	Contact, Plunger	VC-46	*	Washer, Vacuum Chamber, .032" Thick
IAO-20	1	Spring, Contact	VC-46A	*	Washer, Vacuum Chamber, .010" Thick
IAT-2023RG	1	Vacuum Chamber	VC-46B	*	Washer, Vacuum Chamber, .065" Thick
IAT-2035A	1	Base Assy., Dist.	VC-167	1	Spring, Vacuum Chamber
IG-579A	2	BEARING, ABS. BRONZE	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAT-2050RB	1	Plate Assy., Breaker	12X-195	2	Lockwasher, Breaker Plate Sc., #8
IAT-51	1	Lead Assy., Primary	12X-199	1	Lockwasher, Advance Arm, 1/4
IAT-2015RA	1	CONDENSER	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
IAT-2050RS	1	Plate, Breaker	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	X-1270	2	Washer, Vac. Chamber Mtg. Sc. Skpf. #10
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6	X-1590	1	Oiler
IGW-3028BS	1	CONTACT SET, BREAKER	XA-839	1	Pin, Collar
SSB-38	1	Washer, Plain, Contact Lock Sc., #8			
12X-194	2	Lockwasher, Condenser Mtg. & Lead Sc., #6			
8X-884	1	Screw, Lock, Breaker Cont. Fill. Hd. #8-32x3/16			
8X-1546	2	Screw, Condenser Mtg. & Lead, Fill. Hd. #6-32x5/32			
IAU-1016A	1	ROTOR			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IGB-329S	1	SPRING SET, GOV. WEIGHT			
IGB-1007	2	Spring & Hinge, Clamp, Cap			
IGC-2168R	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-17	1	Ring, Lock			
IGS-19S	1	Collar, Shaft			

* Use as required.

UNIT	APPLICATION
IAT-4103	Dodge 6, Dodge Truck, Plymouth 6

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4201 DISTRIBUTOR PARTS LIST

IAT-4201
(Issued 9-7-54)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGS-17	1	Ring, Lock
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAT-6	1	Insulation, Terminal	IGS-117	1	Wick, Felt
IAT-7	1	Insulation, Bushing	IGT-69	1	Spring, Anti-Rattle
IAT-20	1	Advance Arm	SW-213	1	Rivet, Collar
IAT-29	1	Plug	SW-634	1	Washer, Plain, Advance Arm Mtg. Screw
IAT-30	1	Gasket, 1/32" Thick	VC-46	*	Washer .032" Thick
IAT-1033	1	CAP ASSY., DISTRIBUTOR	VC-46A	*	Washer .010" Thick
IAO-7	1	Contact, Plunger	VC-46B	*	Washer .065" Thick
IAO-20	1	Spring, Contact	VC-49	1	Spring
IAT-1002L	1	Shaft, Drive	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAT-1060L	1	Cam & Stop Plate, 6 Cyl. L. H.	8X-173	2	Nut, Term. Stud, Hex. #10-32
IAT-2004LB	1	Plate Assembly, Breaker	8X-183A	1	Washer, Term. Stud, Plain #10
IAT-24L	1	Lead Assembly, Primary	12X-195	2	Lockwasher, Breaker Plate Screw, #8
IAT-2004LBS	1	Plate, Breaker	12X-196	2	Lockwasher, Terminal Stud, #10
IAT-2015L	1	CONDENSER	12X-199	1	Lockwasher, Advance Arm, 1/4
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6	8X-872	2	Screw, Vac. Chamber Mtg., Fill Hd. #10-32x1/4
IGW-3028AS	1	CONTACT SET, BREAKER	X-1270	2	Washer, Vac Chamber Mtg. Screw, Skpf. #10
SSB-38	1	Washer, Contact Lock Sc.	X-1590	1	Oiler
12X-194	1	Lockwasher, Condenser Mtg. Screw, #6	X-3012	1	Stud, Terminal, Primary
8X-884	1	Screw, Contact Lock, Fill. Hd. #8-32x3/16	XA-772	1	Housing, Terminal
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	XA-773	1	Terminal
IAT-2023LJ	1	VACUUM CHAMBER			
IAT-2057	1	Base Assembly, Distributor			
IG-579A	2	Bearing, Abs. Bronze			
IAU-1016A	1	ROTOR			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IGB-199	1	Collar, Shaft, Distributor			
IGB-337S	1	SPRING SET, GOVERNOR WEIGHT			
IGB-1007	2	Spring & Hinge, Clamp, Cap			
IGC-2168L	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGL-9A	1	Washer, Ins., Term. Stud, Outer			

* Use as required.

UNIT	APPLICATION
IAT-4201	Studebaker, Studebaker Truck

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4202 DISTRIBUTOR PARTS LIST

IAT-4202
(Issued 10-20-55)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
I AO-10	1	Washer, Thrust, Inner Drive Shaft, Upper	I GL-9A	1	Washer, Ins. , Term. Stud, Outer
I AO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	I GS-17	1	Ring, Lock
I AT-6	1	Insulation, Terminal	I GS-19S	1	Collar, Shaft
I AT-7	1	Insulation, Bushing	I GS-99	1	Spacer, Cam
I AT-29	1	Plug	I GS-114	1	Arm, Advance
I AT-30	1	Gasket, 1/32" Thick	I GS-115	1	Pointer, Advance Arm
I AT-1016A	1	ROTOR	I GS-117	1	Wick, Felt
I AT-1033	1	CAP ASSY. , DISTRIBUTOR	I GS-1212R	1	Shaft, Drive
I AO-7	1	Contact, Plunger	I GT-70	1	Spring, Anti-Rattle
I AO-20	1	Spring, Contact	SW-213	1	Rivet, Collar
I AT-1060R	1	Cam & Stop Plate, 6 Cyl. R. H.	SW-634	1	Washer, Plain, Advance Arm Mtg. Screw
I AT-2004RC	1	Plate Assembly, Breaker	VC-46	*	Washer, .032" Thick
I AT-24R	1	Lead Assembly, Primary	VC-46A	*	Washer, .010" Thick
I AT-2004RCS	1	Plate, Breaker	VC-46B	*	Washer, .065" Thick
I AT-2015R	1	CONDENSER	VC-149	1	Spring
I GC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	8X-86	1	Screw, Advance Arm. Hex. Hd. 1/4-20x5/8
I GE-15	1	Washer, Plain, Spring Clamp Screw, #6	8X-173	1	Nut, Term. Stud, Hex. #10-32
I GW-3028BS	1	Contact Set, Breaker	8X-183A	1	Washer, Term. Stud, Plain #10
SSB-38	1	Washer, Plain, Contact Lock Screw, #8	12X-195	2	Lockwasher, Breaker Plate Screw #8
12X-194	1	Lockwasher, Condenser Mtg. , #6	12X-196	1	Lockwasher, Terminal Stud, #10
8X-884	1	Screw, Lock, Brkr. Contact, Fill. Hd. #8-32x3/16	12X-199	1	Lockwasher, Advance Arm 1/4
8X-1546	1	Screw, Condenser Mtg. , Fill. Hd. #6-32x5/32	8X-304	2	Screw, Breaker Plate Mtg. , Rd. Hd. #8-32x5/16
I AT-2023RM	1	VACUUM CHAMBER	8X-872	2	Screw, Vac. Chamber Mtg. Fill. Hd. #10-32x1/4
I AT-2045	1	Base Assembly, Distributor	X-1270	2	Washer, Vac. Chamber Mtg. Screw, Skpf. #10
I G-579A	2	Bearing, Abs. Bronze	X-1590	1	Oiler
I G-90	1	Washer, Thrust, Drive Shaft, Lower	X-3012	1	Stud, Terminal, Primary
I G-680	1	Snap Ring, Cam Retaining			
I G-884BS	1	SPRING SET, GOVERNOR WEIGHT			
I GB-1007	2	Spring & Hinge, Clamp, Cap			
I GC-2168R	2	Weight, Governor			
I GH-28	1	Wick, Felt, Cam Steeve			

* Use as required.

UNIT	APPLICATION
IAT-4202	Hudson

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4203, A DISTRIBUTOR PARTS LIST

IAT-4203, A
(Issued 10-20-55)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
I AO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGH-28	1	Wick, Felt, Cam Sleeve
I AO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGL-9A	1	Washer, Ins., Term. Stud, Outer
I AT-6	1	Insulation, Terminal	IGS-17	1	Ring, Lock
I AT-7	1	Insulation, Bushing	IGS-19S	1	Collar, Shaft
I AT-29	1	Plug	IGS-99	1	Spacer, Cam
I AT-30	1	Gasket, 1/32" Thick	IGS-114	1	Arm, Advance
**	1	Spacer	IGS-115	1	Pointer, Advance Arm
I AT-1016A	1	ROTOR	IGS-117	1	Wick, Felt
I AT-1033	1	CAP ASSY., DISTRIBUTOR	IGS-1183RB	1	Shaft, Drive
I AO-7	1	Contact, Plunger	SW-213	1	Rivet, Collar
I AO-20	1	Spring, Contact	SW-634	1	Washer, Plain, Advance Arm Mtg. Screw
**	1	Cam & Stop Plate, 6 Cyl. R. H.	VC-46	*	Washer, .032" Thick
I AT-2004RC	1	Plate Assembly, Breaker	VC-46A	*	Washer, .010" Thick
I AT-24R	1	Lead Assembly, Primary	VC-46B	*	Washer, .065" Thick
I AT-2004RCS	1	Plate, Breaker	**	1	Spring
I AT-2015R	1	CONDENSER	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	8X-173	1	Nut, Term. Stud, Hex. #10-32
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6	8X-183A	1	Washer, Term. Stud, Plain #10
IGW-3028BS	1	CONTACT SET, BREAKER	12X-195	2	Lockwasher, Breaker Plate Screw, #8
SSB-38	1	Washer, Plain, Contact Lock Screw, #8	12X-196	1	Lockwasher, Terminal Stud, #10
12X-194	1	Lockwasher, Condenser Mtg. Screw, #6	12X-199	1	Lockwasher, Advance Arm, 1/4
8X-884	1	Screw, Contact Lock, Fill. Hd. #8-32x3/16	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
**	1	VACUUM CHAMBER	X-1270	2	Washer, Vac. Chamber Mtg. Screw, Skpf. #10
**	1	Base Assembly, Distributor	X-1590	1	Oiler
IG-579A	2	Bearing, Abs. Bronze	X-3012	1	Stud, Terminal, Primary
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
**	1	SPRING SET, GOVERNOR WEIGHT			
IGB-1007	2	Spring & Hinge, Clamp, Cap			
IGC-2168R	2	Weight, Governor			

* Use as required.

** See table following parts list for part number applying to assembly wanted.

Assembly Number	Spacer	Cam & Stop Plate	Vacuum Chamber	Base Assembly	Spring Set, Gov. Weight	Spring
I AT-4203	None	I AT-1060RA	I AT-2023RD	I AT-2045	IG-636XS	VC-156
I AT-4203A	I AT-49	I AT-1060RB	I AT-2023RN	I AT-2045B	IGB-339S	VC-144

UNIT	APPLICATION
I AT-4203, A	Hudson

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT -4204, A DISTRIBUTOR PARTS LIST

IAT -4204, A
(Issued 9-7-54)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGL-9A	1	Washer, Ins., Term. Stud Outer
IAT-6	1	Insulation, Terminal	IGS-17	1	Ring, Lock
IAT-7	1	Insulation, Bushing	IGS-99	1	Spacer, Cam
IAT-29	1	Plug	IGS-117	1	Wick, Felt
IAT-30	1	Gasket, 1/32" Thick	IGS-1134LB	1	Shaft, Drive
IAT-44	1	Arm, Advance	IGT-69	1	Spring, Anti-Rattle
IAT-55	1	Friction Spring	SW-213	1	Rivet, Collar
IAT-1016	1	ROTOR	SW-634	1	Washer, Plain, Advance Arm Mounting Screw
IAT-1041	1	CAP ASSY., DISTRIBUTOR	VC-46	*	Washer, .032" Thick
IAT-2004LB	1	Plate Assembly, Breaker	VC-46A	*	Washer, .010" Thick
IAT-24L	1	Lead Assembly, Primary	VC-46B	*	Washer, .065" Thick
IAT-2004LBS	1	Plate, Breaker	**	1	Spring
IAT-2015L	1	CONDENSER	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	8X-173	2	Nut, Term. Stud, Hex. #10-32
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6	8X-183A	1	Washer, Term. Stud, Plain #10
IGW-3028AS	1	CONTACT SET, BREAKER	12X-195	2	Lockwasher, Breaker Plate Mounting Screw, #8
SSB-38	1	Washer, Plain, Contact Lock Screw, #8	12X-196	2	Lockwasher, Terminal Stud, #10
12X-194	1	Lockwasher, Condenser Mtg. Screw, #6	12X-199	1	Lockwasher, Advance Arm, 1/4
8X-884	1	Screw, Contact Lock, Fill. Hd. #8-32x3/16	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
**	1	VACUUM CHAMBER	X-1270	2	Washer, Vac. Chamber Mtg. Screw, Skpf. #10
IAT-2046	1	Base Assembly, Distributor	X-1590	1	Oiler
IG-579A	2	Bearing, Abs. Bronze	X-3012	1	Stud, Terminal, Primary
IG-90	1	Washer, Thrust, Drive Shaft, Lower	XA-744W	1	Seal, "O" Ring, Distributor Base, 1 1/16" O.D.
IG-680	1	Snap Ring, Cam Retaining			
IG-2456	2	Weight, Governor			
IGB-199	1	Collar, Shaft, Distributor			
**	1	SPRING SET, GOVERNOR WEIGHT			
IGB-1007	2	Spring & Hinge, Clamp, Cap			
IGC-1132LD	1	Cam & Stop Plate, 4 Cyl. L. H.			

* Use as required.

** See table following parts list for part number applying to assembly wanted.

Assembly Number	Vacuum Chamber	Spring Set Gov. Weight	Spring
IAT -4204 IAT -4204A	IAT -2023LD IAT -2023LE	IGB -358BS IG -884S	VC -55 VC -77

UNIT	APPLICATION
IAT -4204, A	Willys

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking such parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4205, A DISTRIBUTOR PARTS LIST

IAT-4205, A
(Issued 9-7-54)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGB-1007	2	Spring & Hinge, Clamp, Cap
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	**	1	SPRING SET, GOVERNOR WEIGHT
IAT-6	1	Insulation, Terminal	IGC-2168L	2	Weight, Governor
IAT-7	1	Insulation, Bushing	IGH-28	1	Wick, Felt, Cam Sleeve
IAT-29	1	Plug, Vacuum Chamber	IGL-9A	1	Washer, Ins., Term. Stud, Outer
IAT-30	1	Gasket, 1/32" Thick	IGS-17	1	Ring, Lock
IAT-43	1	Arm, Advance	IGS-99	1	Spacer, Cam
IAT-55	1	Friction Spring	IGS-117	1	Wick, Felt
IAT-1033	1	CAP ASSY., DISTRIBUTOR	**	1	Shaft, Drive
IAO-7	1	Contact, Plunger	SW-213	1	Rivet, Collar
IAO-20	1	Spring, Contact	VC-46	*	Washer, .032" Thick
**	1	Cam & Stop Plate, 6 Cyl. L. H.	VC-46A	*	Washer, .010" Thick
IAT-2004LB	1	Plate Assy., Breaker	VC-46B	*	Washer, .065" Thick
IAT-24L	1	Lead Assy., Primary	**	1	Spring
IAT-2004LBS	1	Plate, Breaker	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAT-2015L	1	CONDENSER	8X-173	2	Nut, Term. Stud, Hex. #10-32
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	8X-183A	1	Washer, Term. Stud, Plain #10
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6	12X-195	2	Lockwasher, Breaker Plate Screw, #8
IGW-3028AS	1	CONTACT SET, BREAKER	12X-196	2	Lockwasher, Term. Stud, #10
SSB-38	1	Washer, Plain, Contact Lock Screw, #8	12X-199	1	Lockwasher, Advance Arm, 1/4
12X-194	1	Lockwasher, Condenser Mtg. Screw, #6	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
8X-884	1	Screw, Contact Lock, Fill. Hd. #8-32x3/16	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	X-1270	2	Washer, Vac. Chamber Mtg. Screw, Skpf. #10
IAT-2023LE	1	VACUUM CHAMBER	X-1590	1	Oiler
**	1	Base Assembly, Distributor	X-3012	1	Stud, Terminal, Primary
IG-579A	2	Bearing, Abs. Bronze	XA-744W	1	Seal, "O" Ring, Dist. Base, 1/16" O.D.
IAU-1016A	1	ROTOR			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IGB-199	1	Collar, Shaft, Distributor			

* Use as required.

** See table following parts list for part number applying to assembly wanted.

Assembly Number	Cam & Stop Plate	Base Assembly	Spring Set, Gov. Weight	Shaft, Drive	Vacuum Spring
IAT-4205	IAT-1060LA	IAT-2046	IGB-336BS	IGS-1206LB	VC-92
IAT-4205A	IAT-1060LB	IAT-2046A	IGE-24S	IGS-1206LC	VC-77

UNIT	APPLICATION
IAT-4205, A	Willys

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking su -parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT - 4206, A, B DISTRIBUTOR PARTS LIST

IAT - 4206, A, B
(Issued 9-25-56)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGB-1007	2	Spring & Hinge, Clamp, Cap
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGC-2168L	2	Weight, Governor
IAT-6	1	Insulation, Terminal	IGH-28	1	Wick, Felt, Cam Sleeve
IAT-7	1	Insulation, Bushing	IGL-9A	1	Washer, Ins., Term. Stud, Outer
**	1	Spacer	IGS-17	1	Ring, Lock
IAT-1016A	1	ROTOR	IGS-99	1	Spacer, Cam
IAT-1033	1	CAP ASSY., DIST.	IGS-169	1	Arm, Advance
IAO-7	1	Contact, Plunger	IGS-1053LE	1	Shaft, Drive
IAO-20	1	Spring, Contact	**	1	Cam & Stop Plate, 6 Cyl. L,H;
IAT-2004LB	1	Plate Assy., Breaker	IGT-69	1	Spring, Anti-Rattle
IAT-24L	1	Lead Assy., Primary	IGT-117	1	Wick, Felt
IAT-2004LBS	1	Plate, Breaker	SW-634	1	Washer, Plain, Advance Arm Mtg. Sc.
IAT-2015L	1	CONDENSER	**	1	Gasket, 1/32" Thick
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	**	1	Plug
IGE-15	1	Washer, Plain, Spring Clamp Screw #6	VC-46	*	Washer, Vacuum Chamber, .032" Thick
IGW-3028AS	1	CONTACT SET, BREAKER	VC-46A	*	Washer, Vacuum Chamber, .010" Thick
SSB-38	1	Washer, Plain, Contact Lock Sc., #8	VC-46B	*	Washer, Vacuum Chamber, .065" Thick
12X-194	1	Lockwasher, Condenser Mtg. Sc., #6	VC-55	1	Spring
8X-884	1	Screw, Lock, Brkr. Contact, Fill. Hd. #8-32x3/16	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	8X-173	2	Nut, Term. Stud, Hex. #10-32
IAT-2023LD	1	VACUUM CHAMBER	8X-183A	1	Washer, Plain, Term. Stud, #10
**	1	Base Assy., Dist.	12X-195	2	Lockwasher, Breaker Plate Sc., #8
IG-579A	2	BEARING, ABS. BRONZE	12X-196	2	Lockwasher, Terminal Stud, #10
IG-90	1	Washer, Thrust, Drive Shaft, Lower	12X-199	1	Lockwasher, Advance Arm, 1/4
IG-644A	1	Coupling, Drive, Dist.	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
IG-680	1	Snap Ring, Cam Retaining	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
**	1	Spring Set, Gov. Weight	X-1270	2	Washer, Vac. Chamber Mtg. Sc., Skpf. #10
			X-1590	1	Oiler
			X-3012	1	Stud, Terminal, Primary
			XA-839	1	Pin, Coupling

* Use as required.

** See table following parts list for part number applying to assembly wanted.

Assembly No.	Spacer	Base Assy.	Spring Set Gov. Weight	Cam & Stop Plate	Gasket	Plug
IAT-4206	IAT-49	IAT-2058	IGB-358CS	IGS-1100LAH	VC-14	VC-15
IAT-4206A	None	IAT-2058A	IGC-201S	IGS-1100LAJ	IAT-30	IAT-29
IAT-4206B	IAT-49	IAT-2058A	IGB-329BS	IGS-1100LAK	VC-14	VC-15

UNIT	APPLICATION
IAT-4206	Kaiser
IAT-4206A	Kaiser
IAT-4206B	Willys

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4207, A DISTRIBUTOR PARTS LIST

IAT-4207, A
(Issued 4-26-55)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGL-9A	1	Washer, Ins., Term. Stud, Outer
IAT-6	1	Insulation, Terminal	IGS-17	1	Ring, Lock
IAT-7	1	Insulation, Bushing	IGS-19S	1	Collar, Shaft
IAT-29	1	Plug	IGS-99	1	Spacer, Cam
IAT-30	1	Gasket, 1/32" Thick	IGT-69	1	Spring, Anti-Rattle
IAT-39	1	Arm, Advance	IGT-117	1	Wick, Felt
IAT-1033	1	CAP ASSY., DISTRIBUTOR	SW-213	1	Rivet, Collar
IAO-7	1	Contact, Plunger	SW-634	1	Washer, Plain, Advance Arm Mtg. Screw
IAO-20	1	Spring, Contact	VC-45	1	Spring
IAT-1054LA	1	Shaft, Drive	VC-46	*	Washer, .032" Thick
IAT-1060LE	1	Cam & Stop Plate, 6 Cyl. L. H.	VC-46A	*	Washer, .010" Thick
IAT-2004LB	1	Plate Assy., Breaker	VC-46B	*	Washer, .065" Thick
IAT-24L	1	Lead Assy., Primary	8X-86	1	Screw, Advance Arm, Hex. Hd. 1/4-20x5/8
IAT-2004LBS	1	Plate, Breaker	8X-173	2	Nut, Term. Stud, Hex. #10-32
IAT-2015L	1	CONDENSER	8X-183A	1	Washer, Term. Stud, Plain #10
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	12X-195	2	Lockwasher, Breaker Plate Screw, #8
IGE-15	1	Washer, Plain, Spring Clamp Screw, #6	12X-196	2	Lockwasher, Terminal Stud, #10
IGW-3028AS	1	CONTACT SET, BREAKER	12X-199	1	Lockwasher, Advance Arm, 1/4
SSB-38	1	Washer, Plain, Contact Lock Screw, #8	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
12X-194	1	Lockwasher, Condenser Mtg. Screw, #6	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
8X-884	1	Screw, Contact Lock, Fill. Hd. #8-32x3/16	X-1270	2	Washer, Vac. Chamber Mtg. Screw, Skpf. #10
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	X-1590	1	Oiler
IAT-2023LL	1	VACUUM CHAMBER	X-3012	1	Stud, Terminal, Primary
IAT-2038	1	Base Assy., Distributor			
IG-579A	2	BEARING, ABS. BRONZE			
IGW-179	1	Retainer, Oil Seal			
XA-724	1	Oil Seal			
IAU-1016A	1	Rotor			
IG-313	1	Washer, Thrust, Lower			
IG-680	1	Snap Ring, Cam Retaining			
**	1	SPRING SET, GOV. WEIGHT			
IGB-1007	2	Spring & Hinge, Clamp, Cap			
IGC-2168L	2	Weight, Governor			

* Use as required.

** See table following parts list for part number applying to assembly wanted.

Assembly No.	Spring Set
IAT-4207	IGB-328HS
IAT-4207A	IGB-327FS

UNIT	APPLICATION
IAT-4207, A	Nash (Canada)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAT-4301 DISTRIBUTOR PARTS LIST

IAT-4301
(Issued 10-25-55)

Part No	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-106	1	Gear	VC-46	*	Washer, .032" Thick
IAT-6	1	Insulation, Terminal	VC-46A	*	Washer, .010" Thick
IAT-7	1	Insulation, Bushing	VC-46B	*	Washer, .065" Thick
IAT-29	1	Plug, Vacuum Chamber	VC-77	1	Spring
IAT-30	1	Gasket, 1/32" Thick	8X-173	2	Nut, Term. Stud, Hex. #10-32
IAT-1033	1	CAP ASSY., DIST.	8X-183A	1	Washer, Plain, Term. Stud, #10
IAO-7	1	Contact, Plunger	12X-195	2	Lockwasher, Breaker Plate Sc., #8
IAO-20	1	Spring, Contact	12X-196	2	Lockwasher, Term. Stud, #10
IAT-1069R	1	Shaft, Drive	8X-304	2	Screw, Breaker Plate Mtg., Rd. Hd. #8-32x5/16
IAT-2004RC	1	Plate Assy., Breaker	8X-872	2	Screw, Vac. Chamber Mtg., Fill. Hd. #10-32x1/4
IAT-24R	1	Lead Assy., Primary	X-1270	2	Washer, Vac. Chamber Mtg. Sc., Skpf. #10
IAT-2004RCS	1	Plate, Breaker	X-1590	1	Oiler
IAT-2015R	1	CONDENSER	X-3012	1	Stud, Terminal, Primary
IGC-175A	1	Screw, Spring Clamp, Hex. Hd. #6-32x3/16	XA-839	1	Pin, Gear
IGE-15	1	Washer, Plain, Spring Clamp Sc., #6			
IGW-3028BS	1	CONTACT SET, BREAKER			
SSB-38	1	Washer, Plain, Contact Lock Sc., #8			
12X-194	1	Lockwasher, Condenser Mtg., #6			
8X-884	1	Screw, Lock, Brkr. Contact, Fill. Hd. #8-32x3/16			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IAT-2023RE	1	VACUUM CHAMBER			
IAT-2070	1	Base Assy., Dist.			
IG-579A	2	BEARING, ABS. BRONZE			
IAU-1016A	1	ROTOR			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-680	1	Snap Ring, Cam Retaining			
IG-775BS	1	Spring Set, Gov. Weight			
IGB-1007	2	Spring & Hinge, Cap Clamp			
IGC-2168R	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGL-9A	1	Washer, Ins., Term. Stud, Outer			
IGS-17	1	Ring, Lock			
IGS-99	1	Spacer, Cam			
IGS-1100RT	1	Cam & Stop Plate, 6 Cyl. R. H.			
IGT-70	1	Spring, Anti-Rattle			
IGT-117	1	Wick, Felt			

* Use as required.

UNIT	APPLICATION
IAT-4301	Nash (6)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking su -parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAU-4016UT DISTRIBUTOR PARTS LIST

IAU-4016UT
(Issued 1-11-56)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
CY-4002	1	Ignition Coil	IGH-28	1	Wick, Felt, Cam Sleeve
GT-97	1	Wick, Felt	IGP-3028FS	1	CONTACT SET, BREAKER
IAU-6	2	Clamp, Lead	IGS-19S	1	Collar, Shaft
IAU-24	1	Lead Assy. , Breaker Spring Clamp	IGS-99	1	Spacer, Cam
IAU-29	1	Spring, Dist. Cap Contact	IGS-1100RAQ1	1	Cam & Stop Plate, 6 Cyl. R. H.
IAU-39	2	Holder, Breaker Plate	SW-213	1	Rivet, Collar
IAU-52	6	Washer, Cap Sealing	12X-194	1	Lockwasher, Breaker Spring Clamp Sc. , #6
IAU-54	1	Plug, Cap Cover	12X-196	2	Lockwasher, Coil Terminal, #10
IAU-62	1	Seal, Receptacle	X-865A	1	Plug, Pipe, 1/8
IAU-1004	1	Plate, Breaker	X-1270	6	Washer, Cover Sc. , Skpf. #10
IAU-1066	1	ROTOR	8X-1372	2	Nut, Coil Terminal, Hex. #10-32
IAU-1071	1	Capacitor, Dist. Primary	X-2878	2	Screw, Breaker Plate Mtg. , Fill. Hd. #10-32x5/16
IAU-3076L	1	CONDENSER	X-3028	2	Screw, Coil Brkt. , Fill. Hd. #10-32x7/16
IBC-34	1	Cover, Dist. Cap	X-3030	1	Screw, Condenser Mtg. , Fill. Hd. #6-32x3/16
IBC-1027R	1	Shaft, Drive	X-3031	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16
IBC-1035	1	CAP ASSY. , DIST.	X-3032	3	Screw, Cap & Cover Attaching, Fill. Hd. #8-32x1
IBC-2001B	1	Base Assy. , Dist.	X-3123	4	Screw, Receptacle Mtg. , Fill. Hd. #6-32x15/32
IAH-13	1	Washer, Thrust, Adaptor	X-3194	6	Screw, Cover Mtg. , Hex. Socket Hd. #10-32x 5/8
IAU-10	1	Washer, Drive Shaft Seal	XA-744G	1	Seal, "O" Ring, Cover, 4 1/2" O. D.
IAU-12	1	Washer, Adaptor Lock Sc. , Skpf. 1/4	XA-744P	2	Seal, "O" Ring, Cover Plug & Receptacle Mtg. , 3/4" O. D.
IAU-41	1	Plug, Drain			
IAU-42	1	Washer, Plug, Drain			
IBC-1007	1	Adaptor			
IG-579A	2	BEARING, ABS. BRONZE			
19X-464	1	Screw, Adaptor Lock, Hex. Hd. 1/4-20x3/4			
XA-751	1	Seal, Shaft			
IBF-9	1	Receptacle			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-313	1	Washer, Thrust, Drive Shaft, Upper			
IG-676	1	Clip, Breaker Arm Spring			
IG-680	1	Snap Ring, Cam Retaining			
IGB-292SS	1	SPRING SET, GOV. WEIGHT			
IGC-175	1	Screw, Brkr. Spring Clamp, Hex. Hd. #6-32x5/16			
IGC-2168R	2	Weight, Governor			
IGE-15	1	Washer, Plain, Brkr. Spring Clamp Sc. , #6			

UNIT	APPLICATION
IAU-4016UT	Chrysler Industrial

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAX-4001-1M DISTRIBUTOR PARTS LIST

IAX-4001-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner Drive Shaft, Upper	IGB-199	1	Collar, Shaft, Dist.
IAO-11	1	Washer, Thrust, Outer Drive Shaft, Upper	IGC-200S	1	Spring Set, Gov. Weight
IAO-17M	1	Cover, Terminal Slot	IGH-28	1	Wick, Felt, Cam Sleeve
IAR-1003	1	CAP ASSY., DIST.	IGP-1016B	1	ROTOR
IAO-7	1	Contact, Plunger	IGS-99	1	Spacer, Cam
IAO-20	1	Spring, Contact	IGS-114	1	Arm, Advance
IAX-2001M	1	Base Assy., Dist.	IGS-115M	1	Pointer, Advance Arm
IAD-14A	1	Bracket, Cap Spring	IGT-70	1	Spring, Anti-Rattle
IAO-9M	2	Spring, Clamp Cap	IGT-1021RB-1	1	Cam & Stop Plate, 8 Cyl. R.H.
IAO-14M	1	Bracket, Cap Spring & Locating	IGT-1072RF	1	Shaft, Drive
IAR-9M	2	Bracket, Breaker Plate Mtg.	SW-213	1	Rivet, Collar
IG-579A	2	Bearing, Abs. Bronze	SW-634B	1	Washer, Plain, Advance, Arm Mtg.
IGT-117	1	Wick, Felt	12X-199	1	Lockwasher, Advance Arm, 1/4
X-1590	1	Oiler	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
X-2872	4	Rivet, Tubular	X-2862	1	Screw, Advance Arm Mtg. Hex. Hd. 1/4-20x5/8
IAX-2046M	1	Plate Assy., Breaker	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IAX-1046M	1	Plate, Breaker			
IG-3927E	1	CONDENSER			
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGP-60	1	Clip, Spring, Contact Arm			
IGP-3028WS	1	CONTACT SET, BREAKER			
19X-59	1	Screw, Lock, Breaker Contact, #8-32x3/16			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
19X-350	1	Washer, Plain, Contact Lock Screw, #8			
19X-353	1	Washer, Plain, Clamp Screw, #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

UNIT	APPLICATION
IAX-4001-1M	Chrysler (Marine)

(Issued 9-14-50)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAX-4002-1M DISTRIBUTOR PARTS LIST

IAX-4002-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGB-199	1	Collar, Shaft, Dist.
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGC-200S	1	Spring Set, Gov. Weight
IAO-17M	1	Cover, Terminal Slot	IGH-28	1	Wick, Felt, Cam Sleeve
IAR-1003	1	CAP ASSY., DIST.	IGP-1016B	1	ROTOR
IAO-7	1	Contact, Plunger	IGS-148	1	Shaft, Drive, Tachometer
IAO-20	1	Spring, Contact	IGS-38	1	Cover, Housing, Tach. Shaft
IAX-2012M	1	Base Assy., Dist.	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IAD-14A	1	Bracket, Cap Spring	IGS-99	1	Spacer, Cam
IAO-9M	2	Spring, Clamp, Cap	IGS-114	1	Arm, Advance
IAO-14M	1	Bracket, Cap Spring & Locating	IGS-115M	1	Pointer, Advance Arm
IAR-9M	2	Bracket, Breaker Plate Mtg.	IGT-70	1	Spring, Anti-Rattle
IG-579A	2	Bearing, Abs. Bronze	IGT-1021RB-1	1	Cam & Stop Plate, 8 Cyl. R.H.
X-382A	1	Cup, Grease	IGT-1025RD	1	Shaft, Drive
X-2943	4	Rivet, Tubular	SW-213	2	Rivet, Gear & Collar
IAX-2046M	1	Plate Assy., Breaker	SW-634B	1	Washer, Plain, Advance Arm Mtg.
IAX-1046M	1	Plate, Breaker	12X-199	1	Lockwasher, Advance Arm, 1/4
IG-3927E	1	CONDENSER	X-294	1	Bearing, Ball, S.A.E. #202
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IGP-60	1	Clip, Spring, Contact Arm	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
IGP-3028WS	1	CONTACT SET, BREAKER	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-59	1	Screw, Lock, Breaker Contact, #8-32x3/16			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
19X-350	1	Washer, Plain, Contact Lock Screw, #8			
19X-353	1	Washer, Plain, Clamp Screw, #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IG-90	2	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			

UNIT	APPLICATION
IAX-4002-1M	Chrysler (Marine)

(Issued 9-19-50)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAX-4003-1M DISTRIBUTOR PARTS LIST

IAX-4003-1M
(Issued 5-7-51)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGT-70	1	Spring, Anti-Rattle
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGT-1021RB-1	1	Cam & Stop Plate, 8 Cyl. R.H.
IAO-17M	1	Cover, Terminal Slot	IGT-1025RD	1	Shaft, Drive
IAR-1003	1	CAP ASSY., DIST.	SW-213	2	Rivet, Gear & Collar
IAO-7	1	Spring, Contact	SW-634B	1	Washer, Plain, Advance Arm Mtg.
IAO-20	1	Spring, Contact	12X-199	1	Lockwasher, Advance Arm, 1/4
IAX-2013M	1	Base Assy., Dist.	X-294	1	Bearing, Ball, S. A. E. #202
IAD-14A	1	Bracket, Cap Spring	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
IAO-9M	2	Spring, Clamp, Cap	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
IAO-14M	1	Bracket, Cap Spring & Locating	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IAR-9M	2	Bracket, Breaker Plate Mtg.			
IG-579A	2	Bearing, Abs. Bronze			
X-382A	1	Cup, Grease			
X-2872	4	Rivet, Tubular			
IAX-2046M	1	Plate Assy., Breaker			
IAX-1046M	1	Plate, Breaker			
IG-3927E	1	CONDENSER			
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGP-60	1	Clip, Spring, Contact Arm			
IGP-3028WS	1	CONTACT SET, BREAKER			
19X-59	1	Screw, Lock, Breaker Contact, #8-32x3/16			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
19X-350	1	Washer, Plain, Contact Lock Screw, #8			
19X-353	1	Washer, Plain, Clamp Screw, #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IG-90	2	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IG-1456	2	Weight, Governor			
IGB-199	1	Collar, Shaft, Dist.			
IGC-200S	1	Spring Set, Gov. Weight			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGP-1016B	1	ROTOR			
IGS-38	1	Cover, Housing, Tach. Shaft.			
IGS-39	1	Washer, Thrust, Tach. Drive Shaft			
IGS-99	1	Spacer, Cam			
IGS-114	1	Arm, Advance			
IGS-115M	1	Pointer, Advance Arm			
IGS-148	1	Shaft, Drive, Tachometer			

UNIT	APPLICATION
IAX-4003-1M	Chrysler (Marine)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAX-4004-1M DISTRIBUTOR PARTS LIST

IAX-4004-1M
(Issued 1-30-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
GE-47	1	GEAR, TACHOMETER, DRIVER	IGB-199	1	Collar, Shaft, Dist.
GE-48	1	GEAR, TACHOMETER, FOLLOWER	IGC-200S	1	Spring Set, Gov. Weight
IAO-17M	1	Cover, Terminal Slot	IGC-2168R	2	Weight, Governor
IAR-1003	1	CAP ASSY., DIST.	IGH-28	1	Wick, Felt, Cam Sleeve
IAO-7	1	Contact, Plunger	IGP-1016B	1	ROTOR
IAO-20	1	Spring, Contact	IGS-38	1	Cover, Housing, Tach. Shaft
IAX-2013M	1	Base Assy., Dist.	IGS-39	1	Washer, Thrust, Tach. Drive Shaft
IAD-1014M	1	Spring & Hinge, Clamp, Cap	IGS-99	1	Spacer, Cam
IAO-1014M	1	Spring & Hinge, Clamp, Cap Locating	IGS-114	1	Arm, Advance
IAR-9M	2	Bracket, Breaker Plate Mtg.	IGS-115M	1	Pointer, Advance Arm
IG-579A	2	Bearing, Abs. Bronze	IGS-148	1	Shaft, Drive, Tachometer
X-382A	1	Cup, Grease	IGT-70	1	Spring, Anti-Rattle
X-2872	4	Rivet, Tubular	IGT-1021RB-1	1	Cam & Stop Plate, 8 Cyl. R. H.
IAX-2046M	1	Plate Assy., Breaker	IGT-1025RE	1	Shaft, Drive
IAX-1046M	1	Plate, Breaker	SW-213	2	Rivet, Gear & Collar
IG-3927E	1	CONDENSER	SW-634B	1	Washer, Plain, Advance Arm, Mtg.
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	12X-199	1	Lockwasher, Advance Arm, 1/4
IGP-60	1	Clamp, Spring, Contact Arm	X-294	1	Bearing, Ball, S. A. E. #202
IGP-3028WS	1	CONTACT SET, BREAKER	X-1270	2	Washer, Breaker Plate Mtg. Sc., Skpf. #10
19X-59	1	Screw, Lock, Breaker Contact, #8-32x3/16	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-350	1	Washer, Plain, Contact Lock Screw, #8			
19X-353	1	Washer, Plain, Clamp Screw, #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IG-90	2	Washer, Thrust, Drive Shaft			
IG-680	1	Snap Ring, Cam Retaining			

UNIT	APPLICATION
IAX-4004-1M	Chrysler Industrial, Chrysler Marine

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAX-4005-1M DISTRIBUTOR PARTS LIST

IAX-4005-1M
(Issued 4-11-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGP-1016B	1	ROTOR
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAO-17M	1	Cover, Terminal Slot	IGS-114A	1	Arm, Advance
IAR-1003	1	CAP ASSY., DIST.	IGS-115M	1	Pointer, Advance Arm
IAO-7	1	Contact, Plunger	IGT-70	1	Spring, Anti-Rattle
IAO-20	1	Spring, Contact	IGT-1021RB-1	1	Cam & Stop Plate, 8 Cyl. R. H.
IAX-2001M	1	Base Assy., Dist.	IGT-1072RH	1	Shaft, Drive
IAD-1014M	1	Spring & Hinge, Clamp, Cap	SW-213	1	Rivet, Collar
IAO-1014M	1	Spring & Hinge, Clamp, Cap Locating	SW-634B	1	Washer, Plain, Advance Arm Mtg.
IAR-9M	2	Bracket, Breaker Plate Mtg.	12X-199	1	Lockwasher, Advance Arm, 1/4
IG-579A	2	Bearing, Abs. Bronze	X-1270	2	Washer, Breaker Plate Mtg., Sc., Skpf. #10
IGT-117	1	Wick, Felt	X-2862	1	Screw, Advance Arm Mtg., Hex. Hd. 1/4-20x5/8
X-1590	1	Oiler	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
X-2872	4	Rivet, Tubular			
IAX-2046M	1	Plate Assy., Breaker			
IAX-1046M	1	Plate, Breaker			
IG-3927E	1	CONDENSER			
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16			
IGP-60	1	Clamp, Spring, Contact Arm			
IGP-3028WS	1	CONTACT SET, BREAKER			
19X-59	1	Screw, Lock, Breaker Contact, #8-32x3/16			
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6			
19X-350	1	Washer, Plain, Contact Lock Screw, #8			
19X-353	1	Washer, Plain, Clamp Screw, #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IG-90	1	Washer, Thrust, Drive Shaft, Lower			
IG-680	1	Snap Ring, Cam Retaining			
IGB-199	1	Collar, Shaft, Dist.			
IGC-200S	1	Spring Set, Gov. Weight			
IGC-2168R	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			

UNIT	APPLICATION
IAX-4005-1M	Chrysler (Marine), Chrysler (Industrial)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAY-4000 }
IAY-6000 } SERIES DISTRIBUTOR PARTS LIST

IAY-4000 Series
IAY-6000 Series
(Issued 3-7-56)

Model No.	No. Cyl.	CUSTOMER
IAY-4001-1	6	Chrysler Ind. , Dodge Truck
IAY-4001A-1	6	Dodge Truck (Canada)
IAY-4002-1	6	Dodge Truck
IAY-4003-1	6	Dodge Truck
IAY-4003-1F	6	Dodge Truck
IAY-4003A-1	6	Dodge Truck
IAY-4003B-1	6	Dodge Truck
IAY-4004-1	6	Dodge Truck
IAY-4004-1F	6	Dodge Truck
IAY-4004A-1	6	Dodge Truck
IAY-4004B-1	6	Dodge Truck
IAY-4004C-1	6	Dodge Truck
IAY-4005A-1	4	Towmotor
IAY-4006-1	6	Dodge Truck
IAY-4007A-1	6	Towmotor
IAY-4008-1	6	Dodge Truck (Canada)
IAY-4009	6	Chris Craft
IAY-4009-1	6	Universal
IAY-4009-1A	6	Universal
IAY-4009A	6	Owens Yacht
IAY-4009B	6	Palmer Marine
IAY-4010	4	Chris Craft
IAY-4010A	4	Lathrop Marine
IAY-4012	4	Willys Truck
IAY-6001	6	Gray Marine
IAY-6003	4	Gray Marine

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

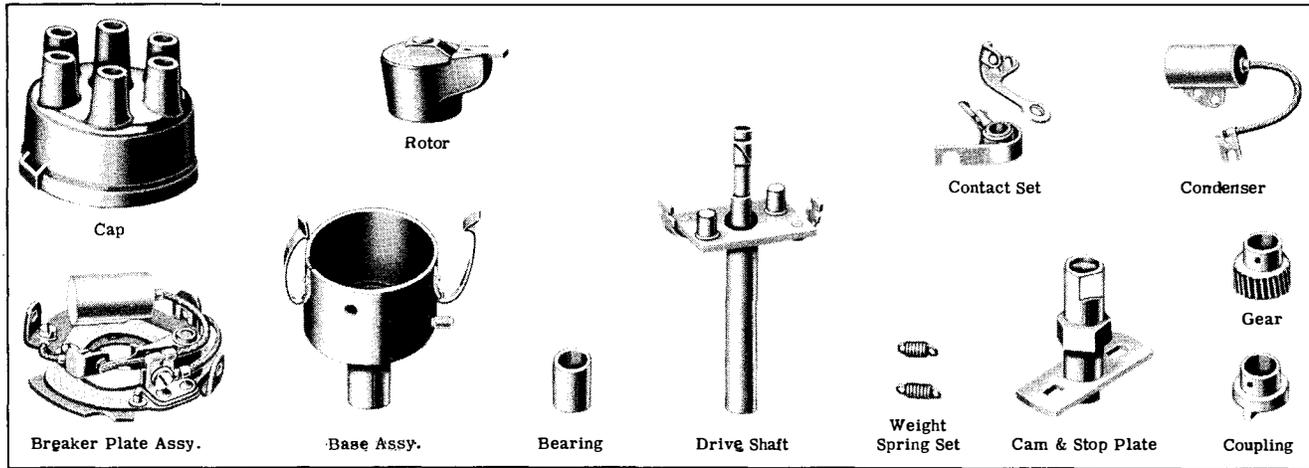






ILLUSTRATION SHOWS TYPICAL PARTS ONLY

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IAY-4001-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1112RA	IG-636QS	IGS-1100RA	- - -
IAY-4001A-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1112RA	IGB-292SS	IGS-1100RA	- - -
IAY-4002-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1113RA	IG-636HS	IGS-1100RX	- - -
IAY-4003-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1113RE	IGB-353BS	IGS-1100RX	- - -
IAY-4003-1F	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012S	IG-579A	IGS-1113RE	IGB-353BS	IGS-1100RX	- - -
IAY-4003A-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1113RE	IG-636HS	IGS-1100RX	- - -
IAY-4003B-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1113RE	IGB-329S	IGS-1100RN	- - -
IAY-4004-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IG-636QS	IGS-1100RA-5	- - -
IAY-4004-1F	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012S	IG-579A	IGS-1112RE	IG-636QS	IGS-1100RA-5	- - -
IAY-4004A-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IGB-292SS	IGS-1100RA-5	- - -
IAY-4004B-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IGB-353BS	IGS-1100R-5	- - -
IAY-4004C-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IGB-292SS	IGS-1100R-5	- - -
IAY-4005A-1	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2013	IG-579A	IGS-1053RE	IGE-29S	IGC-1132RG	IA-113
IAY-4006-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1113RG	IG-636HS	IGS-1100RX	- - -
IAY-4007A-1	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2013	IG-579A	IGS-1053RE	IGB-358AS	IGS-1100RAF	IA-113
IAY-4008-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1112RF	IG-636QS	IGS-1100RA	- - -
IAY-4009	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IG-863S	IGS-1100RN	- - -
IAY-4009-1	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGB-312S	IGS-1100RAF	- - -
IAY-4009-1A	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGB-312S	IGS-1100RAF	- - -
IAY-4009A	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGE-24S	IGS-1100RAE	- - -
IAY-4009B	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGE-29S	IGS-1100RAZ	- - -
IAY-4010	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IG-863S	IGC-1132RM	- - -
IAY-4010A	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGE-29S	IGC-1132RN	- - -
IAY-4012	IAT-1041	IAT-1016	IGW-3028DS	IAT-2015LA	IAY-1004	IAY-2013B	IG-579A	IGS-1134LE	IG-884S	IGC-1132LB	- - -
IAY-6001	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014A	IG-579A	IGS-1180R	IGE-29S	IGS-1100RP	- - -
IAY-6003	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014A	IG-579A	IGS-1180R	IGC-207S	IGC-1132RF	- - -

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
 ARM, Advance	IAT-44 IGS-114	1 1	IAY-4005A-1, IAY-4007A-1, IAY-4012 IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4006-1, IAY-4008-1
 COLLAR, Shaft	IGS-198 IGB-199	1 1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4006-1, IAY-4008-1 IAY-4012
 CONTACT, Plunger	IAO-7	1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4006-1, IAY-4008-1
 INSULATION, Bushing	IAY-7	1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4005A-1, IAY-4006-1, IAY-4007A-1, IAY-4008-1, IAY-4009-1, -1A, IAY-4009, A, B, IAY-4010, A, IAY-4012, IAY-6001, IAY-6003
 INSULATION, Terminal	IAY-8	1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4005A-1, IAY-4006-1, IAY-4007A-1, IAY-4008-1, IAY-4009-1, -1A, IAY-4009, A, B, IAY-4010, A, IAY-4012, IAY-6001, IAY-6003
 LOCKWASHERS (A) Advance Arm, 1/4 (B) Breaker Plate Sc. #8 (C) Condenser Mtg. Sc. #6 (D) Terminal Stud #10	12X-199 12X-195 12X-194 12X-196	1 2 1 2	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4005A-1, IAY-4006-1, IAY-4007A-1, IAY-4008-1, IAY-4012 All All All
 NUT, Term. Stud, Hex. #10-32	8X-173	2	All
 OILER	X-1590	1	All
 POINTER, Advance Arm	IGS-115	1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4006-1, IAY-4008-1
 RIVET Collar	SW-213	1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4006-1, IAY-4008-1, IAY-4012
 RIVET Gear	SW-213	1	IAY-4005A-1, IAY-4007A-1, IAY-4009-1, -1A
 SCREWS (A) Advance Arm, Hex. Hd. 1/4-20x5/8 (B) Breaker Contact, Fill Hd. #8-32x3/16 (C) Breaker Plate Mtg., Rd. Hd. #8-32x5/16 (B) Condenser Mtg., Fill. Hd. #6-32x5/32	8X-86 8X-884 8X-304 8X-1546	1 1 2 1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4005A-1, IAY-4006-1, IAY-4007A-1, IAY-4008-1, IAY-4012 All All All
 SEAL, "O"RING, Dist. Base	XA-744W	1	IAY-4012, IAY-6001, IAY-6003
 SNAP RING, Cam Retaining	IG-680	1	All
 SPACERS (A) Cam (B) Terminal	IGS-99 IAY-9	1 1	All All
 SPRINGS (A) Anti-Rattle (B) Cap Clamp Spring & Hinge (C) Contact (A) Anti-Rattle (D) Friction	IGT-70 IGB-1007 IAO-20 IGT-69 IAT-55	1 2 1 1 1	IAY-4004C-1, IAY-4005A-1, IAY-4007A-1, IAY-6001, IAY-6003 All IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4006-1, IAY-4008-1 IAY-4012 IAY-4012
 STUD, Terminal, Primary	X-931	1	All
 WASHERS (A) Advance Arm Mtg. Sc., Plain (B) Breaker Contact, Plain #8 (C) Insulated, Terminal Stud, Outer (D) Terminal Stud, Plain #10 (E) Thrust, Drive Shaft, Lower (F) Thrust, Drive Shaft, Upper (Inner) (F) Thrust, Drive Shaft, Upper (Outer)	SW-634 8X-350 IGL-9A 8X-183A IG-90 IAO-10 IAO-11	1 1 1 1 1 1 1	IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1 IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4005A-1, IAY-4006-1, IAY-4007A-1, IAY-4008-1, IAY-4012 All All All All All All
 WEIGHT, Governor	IG-1456 IGC-2168L IGC-2168R	2 2 2	IAY-4001-1, A-1, IAY-4002-1 IAY-4012 IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1 IAY-4005A-1, IAY-4006-1, IAY-4007A-1, IAY-4008-1, IAY-4009, -1-1A, A, B, IAY-4010, A, IAY-6001, IAY-6003

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
 A	WICHS	IGH-28	1 All
 B	(B) Felt, Cam Sleeve	IGS-117	1 IAY-4005A-1, IAY-4007A-1, IAY-4009-1, -1A, IAY-4009, A, B, IAY-4010, A, IAY-4012, IAY-6001, IAY-6003
(A) Felt, Dist. Oiler	(A) Felt, Dist. Oiler	IGT-117	1 IAY-4001-1, A-1, IAY-4002-1, IAY-4003-1, 1F, A-1, B-1, IAY-4004-1, 1F, A-1, B-1, C-1, IAY-4006-1, IAY-4008-1

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IAY-4000 }
IAY-6000 } SERIES DISTRIBUTOR PARTS LIST

IAY-4000 Series
IAY-6000 Series
(Issued 12-12-56)

Model No.	No. Cyl.	CUSTOMER
IAY-4001-1	6	Chrysler Ind. Dodge Truck
IAY-4001A-1	6	Dodge Truck (Canada)
IAY-4002-1	6	Dodge Truck
IAY-4003-1	6	Dodge Truck
IAY-4003-1F	6	Dodge Truck
IAY-4003A-1	6	Dodge Truck
IAY-4003B-1	6	Dodge Truck
IAY-4004-1	6	Dodge Truck
IAY-4004-1F	6	Dodge Truck
IAY-4004A-1	6	Dodge Truck
IAY-4004B-1	6	Dodge Truck
IAY-4004C-1	6	Dodge Truck
IAY-4005A-1	4	Towmotor
IAY-4006-1	6	Dodge Truck
IAY-4007A-1	6	Towmotor
IAY-4008-1	6	Dodge Truck (Canada)
IAY-4009	6	Chris Craft
IAY-4009-1	6	Universal
IAY-4009-1A	6	Universal
IAY-4009A	6	Owens Yacht
IAY-4009B	6	Palmer Marine
IAY-4010	4	Chris Craft
IAY-4010A	4	Lathrop Marine
IAY-4011	6	Towmotor
IAY-4012	4	Willys Truck
IAY-4013	6	Gray Marine
IAY-4013A	6	Gray Marine
IAY-4014	4	Gray Marine
IAY-4015A-1	4	Towmotor
IAY-6001	6	Gray Marine
IAY-6003	4	Gray Marine

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

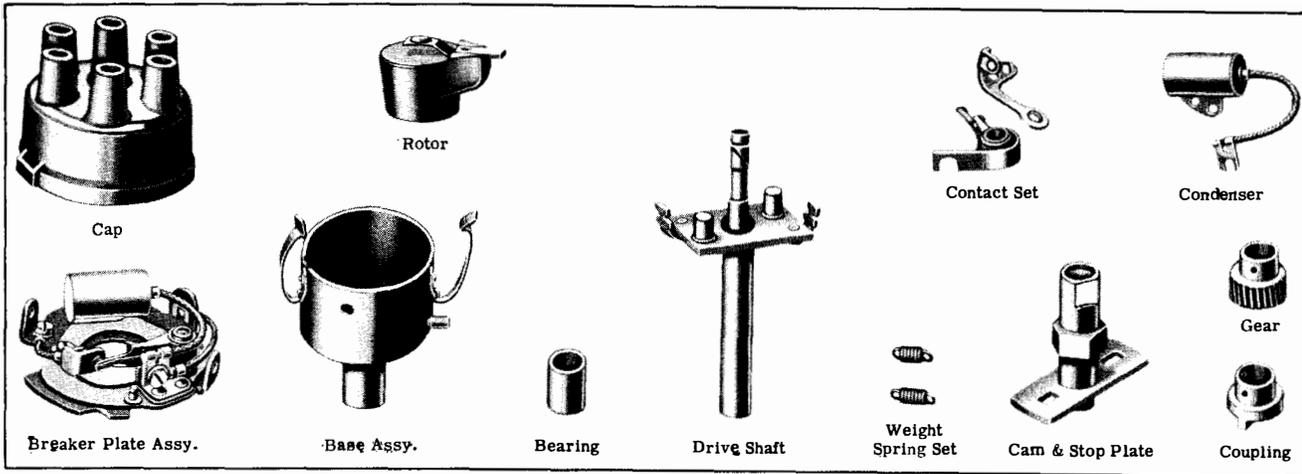


ILLUSTRATION SHOWS TYPICAL PARTS ONLY

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IAY-4001-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1112RA	IG-636QS	IGS-1100RA	- - - -
IAY-4001A-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1112RA	IGB-292SS	IGS-1100RA	- - - -
IAY-4002-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1113RA	IG-636HS	IGS-1100RX	- - - -
IAY-4003-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1113RE	IGB-353BS	IGS-1100RX	- - - -
IAY-4003-1F	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012S	IG-579A	IGS-1113RE	IGB-353BS	IGS-1100RX	- - - -
IAY-4003A-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1113RE	IG-636HS	IGS-1100RX	- - - -
IAY-4003B-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1113RE	IGB-329S	IGS-1100RN	- - - -
IAY-4004-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IG-636QS	IGS-1100RA-5	- - - -
IAY-4004-1F	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012S	IG-579A	IGS-1112RE	IG-636QS	IGS-1100RA-5	- - - -
IAY-4004A-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IGB-292SS	IGS-1100RA-5	- - - -
IAY-4004B-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IGB-353BS	IGS-1100R-5	- - - -
IAY-4004C-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2012	IG-579A	IGS-1112RE	IGB-292SS	IGS-1100R-5	- - - -
IAY-4005A-1	IAT-1041	IAU-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2013	IG-579A	IGS-1053RE	IGE-29S	IGC-1132RG	IA-113
IAY-4006-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1113RG	IG-636HS	IGS-1100RX	- - - -
IAY-4007A-1	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2013	IG-579A	IGS-1053RE	IGB-358AS	IGS-1100RAF	IA-113
IAY-4008-1	IAT-1033	IAU-1016A	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2001	IG-579A	IGS-1112RF	IG-636QS	IGS-1100RA	- - - -
IAY-4009	IAT-1003	IAT-1016	IGW-3028ES	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IG-863S	IGS-1100RN	- - - -
IAY-4009-1	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGB-312S	IGS-1100RAF	- - - -
IAY-4009-1A	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGB-312S	IGS-1100RAF	- - - -
IAY-4009A	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGE-24S	IGS-1100RAE	- - - -
IAY-4009B	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGE-29S	IGS-1100RAZ	- - - -
IAY-4010	IAT-1041	IAT-1016	IGW-3028ES	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IG-863S	IGC-1132RM	- - - -
IAY-4010A	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014	IG-579A	IGS-1216R	IGE-29S	IGC-1132RN	- - - -
IAY-4011	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2013	IG-579A	IGS-1053LE	IGB-358AS	IGS-1100LC	IG-644A
IAY-4012	IAT-1041	IAT-1016	IGW-3028DS	IAT-2015LA	IAY-1004	IAY-2013B	IG-579A	IGS-1134LE	IG-884S	IGC-1132LB	- - - -
IAY-4013	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014A	IG-579A	IGS-1180R	IGE-29S	IGS-1100RP	GE-88
IAY-4013A	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014A	IG-579A	IGS-1180R	IGE-29S	IGS-1100RP	GE-89
IAY-4014	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014A	IG-579A	IGS-1180R	IGC-207S	IGC-1132RF	GE-89
IAY-4015A-1	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2013	IG-579A	IGS-1053LE	IGE-29S	IGC-1132LF	IG-644A
IAY-6001	IAT-1003	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014A	IG-579A	IGS-1180R	IGE-29S	IGS-1100RP	- - - -
IAY-6003	IAT-1041	IAT-1016	IGW-3028DS	IAT-3076LA	IAY-1004	IAY-2014A	IG-579A	IGS-1180R	IGC-207S	IGC-1132RF	- - - -

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
 WEIGHT, Governor	IG-1456	2	LAY-4001-1, A-1, LAY-4002-1
	IGC-2168L	2	LAY-4012, LAY-4015A-1
	IGC-2168R	2	LAY-4003-1, 1F, A-1, B-1, LAY-4004-1, 1F, A-1, B-1, C-1
			LAY-4005A-1, LAY-4006-1, LAY-4007A-1, LAY-4008-1, LAY-4009-1, 1A, A, B, LAY-4010, A, 4013, A, 4014, LAY-6001, LAY-6003
WICKS (B) Felt, Cam Sleeve (A) Felt, Dist. Oiler	IGH-28	1	All
	IGS-117	1	LAY-4005A-1, LAY-4007A-1, LAY-4009-1, 1A, LAY-4009, A, LAY-4009B, LAY-4010, 4010A, LAY-4012, 4013, A, 4014, LAY-4015A-1, LAY-6001, 6003
 (A) Felt, Dist. Oiler	IGT-117	1	LAY-4001-1, A-1, LAY-4002-1, LAY-4003-1, 1F, A-1, B-1, LAY-4004-1, 1F, A-1, B-1, C-1, LAY-4006-1, LAY-4008-1