

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4000 SERIES DISTRIBUTOR PARTS LIST

IGC-4000 Series


(Issued 6-4-51)

Model No.	No. Cyl.	CUSTOMER
IGC-4005B	6	Hercules, Le Blond Schacht
IGC-4007	4	Acadia
IGC-4031	6	Peter Pirsch
IGC-4032C	4	Hercules, Waukesha
IGC-4032E	4	Palmer Bros., Whitcomb
IGC-4033A	4	Continental, Towmotor
IGC-4033B	4	Continental, Williamette
IGC-4040B	6	Universal
IGC-4040C	6	Universal
IGC-4048C	4	Palmer Bros.
IGC-4054B	6	Continental
IGC-4054D	6	Ward LaFrance
IGC-4060A	4	Continental
IGC-4060B	4	Continental
IGC-4060C	4	Continental
IGC-4061A	6	Continental
IGC-4061B	6	Continental
IGC-4062	6	Reo Truck
IGC-4062A	6	Reo Truck
IGC-4063	6	Reo Truck
IGC-4064	6	Hercules, Le Blond Schacht
IGC-4065	6	Diamond T
IGC-4067	6	Peter Pirsch

File in
Equipment & Parts List Binder

Printed in U. S. A.





ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

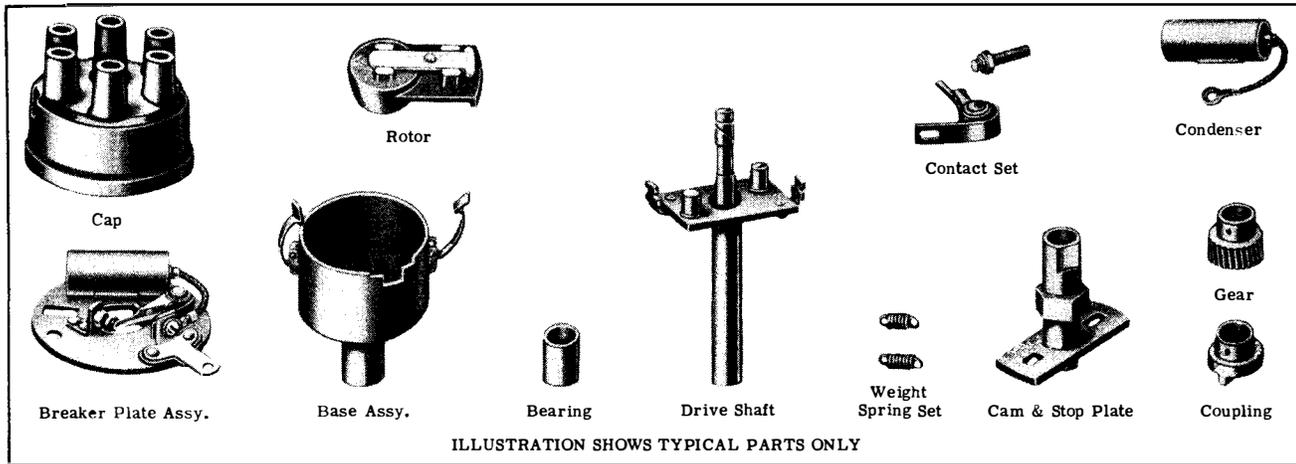

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-4005B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IA-77S	IGC-1143RC	---
IGC-4007	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2074	IG-579A	IGC-1011L	IG-636S	IGC-1459L	---
IGC-4031	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-2028R	---	---	IG-644
IGC-4032C	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-1034R	---	---	IG-261
IGC-4032E	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-1034R	---	---	GE-6
IGC-4033A	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1011R	IGC-42S	IGC-1459R	IG-261
IGC-4033B	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1011R	IG-775S	IGC-1143RH	GK-36
IGC-4040B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2051	IG-579	IGC-1050L	IG-775S	IGC-1143L	GAF-72
IGC-4040C	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2051	IG-579	IGC-1050L	IG-775S	IGC-1143L	GAF-73
IGC-4048C	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1072R	IG-636S	IGC-1067RJ	IG-454
IGC-4054B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IG-636S	IGC-1067LH	IG-644
IGC-4054D	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IG-636LS	IGC-1067LA	IG-644
IGC-4060A	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RB	IGC-42S	IGC-1067RC	GK-36
IGC-4060B	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RB	IG-776S	IGC-1067RX	GK-36
IGC-4060C	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RB	IGE-30BS	IGC-1067RZ	GK-36
IGC-4061A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1072R	IG-817S	IGC-1067RP	GG-9A
IGC-4061B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1072R	IGE-30AS	IGC-1067RV	GG-9A
IGC-4062	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RA	IGB-284BS	IGC-1067RY	IGL-44
IGC-4062A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RA	IGB-208S	IGC-1144RM	IGL-44
IGC-4063	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RA	IGB-284BS	IGC-1067RY	IGL-44
IGC-4064	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2140	IG-579A	IGC-2141R	---	---	---
IGC-4065	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGB-130S	IGC-1067RL	---
IGC-4067	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2140	IG-579A	IGC-2141RA	---	---	IGC-133

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On	
	ARM, ADVANCE			
	IG-1860A	1	IGC-4060A B, C, IGC-4061A, B	
	IG-2806	1	IGC-4032C, D	
	IG-2860A-2	1	IGC-4033A, B, IGC-4048C	
	IG-2902	1	IGC-4005B	
	IGB-2171E-5	1	IGC-4063	
	IGC-2024A-3	1	IGC-4031	
	IGC-2024AJ-14	1	IGC-4065	
	IGC-2052	1	IGC-4054D	
	IGC-2052-1	1	IGC-4054B	
	IGC-2086	1	IGC-4064, IGC-4067	
IGS-1020	1	IGC-4062, A		
	CLIP, Contact Arm Spring	IG-676	1	All
	CONTACT, Dist. Cap Plunger	IG-514	1	All
	LOCKWASHERS			
	(A) Breaker Plate Mtg. Sc. #10	12X-196	2	All
	(B) Condenser & Clamp Sc. #6	X-194	2	All
	(A) Terminal Sc. #10	12X-196	1	All
	NUT, Breaker Contact Lock	IB-23	1	All
	OILER, Dist. Base	X-490A	1	All
	PLATE, Breaker	IGC-2012	1	All
	POINTER, Advance Arm	IGS-21	1	IGC-4062, A
	RIVETS			
	(A) Coupling	SW-213	1	IGC-4031, IGC-4054B, D, IGC-4062A, IGC-4063, IGC-4067
	(A) Gear	SW-213	1	IGC-4032C, E, IGC-4033A, B, IGC-4048C, IGC-4060A, B, C, IGC-4061A, B
	(A) Gear	IG-86	1	IGC-4040B, C
	(B) Tubular, Cap Spring	IG-326	2	IGC-4031, IGC-4032C, E, IGC-4064, IGC-4067
	(C) Tubular, Cap Spring	X-7448	2	IGC-4005B, IGC-4007, IGC-4033A, B, IGC-4040B, C, IGC-4048C, IGC-4054B, D, IGC-4060A, B, C, IGC-4061A, B, IGC-4062, A, IGC-4063, IGC-4065
	SCREWS			
	(A) Breaker Plate Mtg. Fill. Hd. #10-32x5/16	8X-870	2	IGC-4005B, IGC-4007, IGC-4033A, B, IGC-4040B, C, IGC-4048C, IGC-4054B, D, IGC-4060A, B, C, IGC-4061A, B, IGC-4062, A, IGC-4063, IGC-4065
	(A) Breaker Plate Mtg. Fill. Hd. #10-32x3/8	8X-902	2	IGC-4031, IGC-4032C, E, IGC-4064, IGC-4067
	(B) Clamp Spring Rd. Hd. #6-32x1/4	8X-302	1	All
	(A) Condenser Mtg. Fill. Hd. #6-32x5/32	8X-1546	1	All
	(A) Terminal Fill. Hd. #10-32x1/4	8X-872	1	All
	SPACER, Cam	IGS-99	1	IGC-4048C, IGC-4054B, D, IGC-4060A, B, C, IGC-4061A, B, IGC-4062, A, IGC-4063, IGC-4065
	SPRINGS			
	(C) Anti-Rattle	IGE-35	1	IGC-4060C, IGC-4061A, B, IGC-4062, A, IGC-4063
	(C) Anti-Rattle	IGE-36	1	IGC-4054B
	(B) Cap Clamp	IG-694	2	All
	(A) Contact, Dist. Cap	IG-515A	1	All
	WASHERS			
	(A) Thrust, Advance Arm	IG-816	1	IGC-4005B, IGC-4032C, E, IGC-4033A, B, IGC-4048C, IGC-4054B, D, IGC-4060A, B, C, IGC-4061A, B
	(A) Thrust, Advance Arm	IG-816A	1	IGC-4031, IGC-4062, A, IGC-4063, IGC-4065
	(B) Thrust, Drive Shaft (Lower)	IG-90	1	All
	(B) Thrust, Drive Shaft (Upper)	IG-90	1	IGC-4005B, IGC-4007, IGC-4031, IGC-4032C, E, IGC-4033A, B, IGC-4040B, C, IGC-4064, IGC-4067
	(C) Thrust, Drive Shaft (Upper)	IGS-104	1	IGC-4054B, D, IGC-4060A, B, C, IGC-4062, A, IGC-4063, IGC-4065
	(D) Thrust, Drive Shaft (Upper)	IGW-46	1	IGC-4048C, IGC-4061A, B

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4000 SERIES DISTRIBUTOR PARTS LIST

IGC-4000 Series

(Issued 6-4-51)

Model No.	No. Cyl.	CUSTOMER
IGC-4005B	6	Hercules, Le Blond Schacht
IGC-4007	4	Acadia
IGC-4031	6	Peter Pirsch
IGC-4032C	4	Hercules, Waukesha
IGC-4032E	4	Palmer Bros., Whitcomb
IGC-4033A	4	Continental, Towmotor
IGC-4033B	4	Continental, Williamette
IGC-4040B	6	Universal
IGC-4040C	6	Universal
IGC-4048C	4	Palmer Bros.
IGC-4054B	6	Continental
IGC-4054D	6	Ward LaFrance
IGC-4060A	4	Continental
IGC-4060B	4	Continental
IGC-4060C	4	Continental
IGC-4061A	6	Continental
IGC-4061B	6	Continental
IGC-4062	6	Reo Truck
IGC-4062A	6	Reo Truck
IGC-4063	6	Reo Truck
IGC-4064	6	Hercules, Le Blond Schacht
IGC-4065	6	Diamond T
IGC-4067	6	Peter Pirsch

File in
Equipment & Parts List Binder


ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4200 SERIES DISTRIBUTOR PARTS LISTS

IGC-4200 Series
(Issued 12-3-53)

Model No.	No. Cyl.	CUSTOMER
IGC-4205	6	Buda, Hercules, Waukesha
IGC-4209B	4	Elwell Parker, Hercules
IGC-4210A	6	Ahrens Fox, Biederman, Maxim Motors
IGC-4214A	6	Brockway
IGC-4214B	6	Brockway
IGC-4216B	6	Bay City, Duplex, Peter Pirsch, Waukesha
IGC-4220A	6	Continental, Peter Pirsch
IGC-4225B	6	Buda, Dart Tr., Duplex Tr.
IGC-4225D	6	Bay City, Hercules
IGC-4225F	6	Buda, Hanson, Insley Mfg.
IGC-4227A	6	Climax, Sterling
IGC-4227B	6	Crown Body, Hercules, U.S. Motors
IGC-4227C	6	Four Wheel Drive, Hercules, U.S. Motors
IGC-4227E	6	Bay City, Hercules, Ross Carrier
IGC-4227F	6	Kermath
IGC-4228A	6	Climax, Fate Root Heath
IGC-4236A	6	Hanson Clutch, Sterling, Waukesha
IGC-4236B	6	Brockway, Continental
IGC-4236C	6	Continental, Massey Harris
IGC-4238	6	Hercules, Peter Pirsch
IGC-4240B	6	Hercules, Peter Pirsch
IGC-4241A	6	Continental
IGC-4246	6	Gray Marine
IGC-4246B	6	Hercules, U.S. Motors
IGC-4247	6	Duplex Tr.
IGC-4251	6	Hercules, Linn Mfg.
IGC-4251B	6	Galion, Hercules
IGC-4253A	6	Hercules, Hyster, Le Blond Schacht, Ross Carrier
IGC-4253B	6	Bay City, Hercules, Moreland
IGC-4259	6	Hercules, Kermath
IGC-4262	6	Hercules, Moreland
IGC-4264	4	Buda, Duplex
IGC-4272	6	Garford, White
IGC-4272A	6	Garford
IGC-4272A-1	6	Diamond T
IGC-4274	6	Diamond T
IGC-4274A	6	Diamond T
IGC-4275	6	Brockway
IGC-4276	6	Nash 6
IGC-4277	6	Hupp 6
IGC-4279	6	Chris Craft
IGC-4279-1	6	Kermath
IGC-4279A	6	Universal
IGC-4280A	6	Climax
IGC-4281	6	Hercules
IGC-4281A	6	Hercules
IGC-4281B	6	Young Engine
IGC-4284A	6	Southern Coach, Sterling, Harnischfeger
IGC-4285	6	Duplex
IGC-4285A	6	White
IGC-4285B	6	Lincoln Electric
IGC-4286	6	Diamond T
IGC-4287A	6	Universal
IGC-4287B	6	Universal
IGC-4288	6	Continental
IGC-4294	6	Lathrop Engine
IGC-4296	4	Lathrop Engine

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

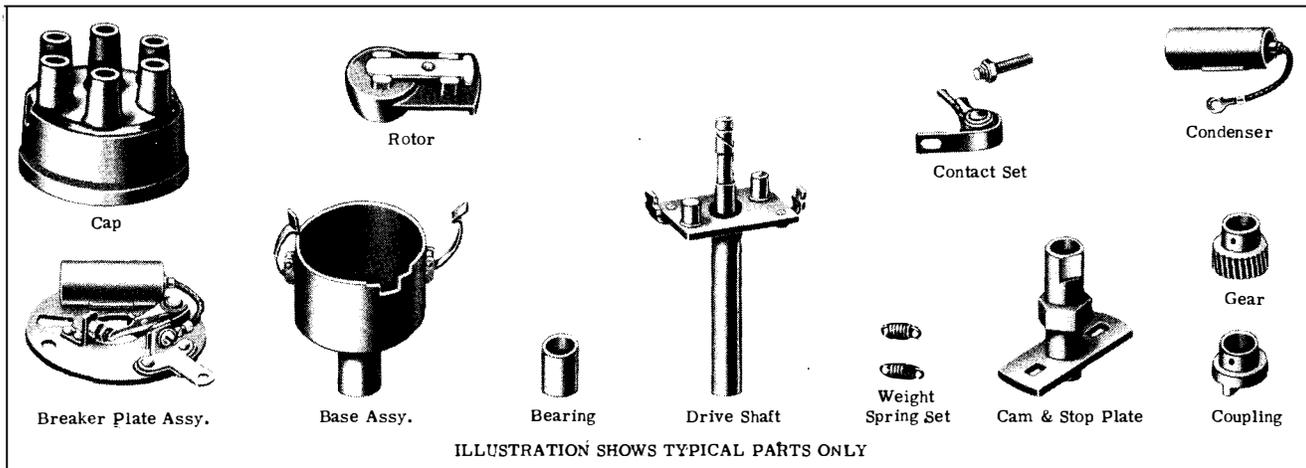

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-4205	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-2031R	- - -	- - -	- - -
IGC-4209B	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IG-776S	IGC-1459RA	- - -
IGC-4210A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-2031R	- - -	- - -	- - -
IGC-4214A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IGE-29S	IGC-1067LP	IG-644
IGC-4214R	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IG-784S	IGC-1067LQ	IG-644
IGC-4216B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IG-776S	IGC-1144RF	- - -
IGC-4220A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IG-784S	IGC-1144L	IG-644
IGC-4225B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IG-784S	IGC-1144R	- - -
IGC-4225D	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1065RA	IGE-29S	IGC-1067RL	- - -
IGC-4225F	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGB-208S	IGC-1067RAC	- - -
IGC-4227A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IG-776S	IGC-1144RF	- - -
IGC-4227B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGB-130S	IGC-1067RU	- - -
IGC-4227C	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1065RA	IGE-29S	IGC-1067RL	- - -
IGC-4227E	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1065RA	IGB-130S	IGC-1067RL	- - -
IGC-4227F	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1065RA	IG-775S	IGC-1067RT	- - -
IGC-4228A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2172	IG-579A	IGC-2031R	- - -	- - -	- - -
IGC-4236A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IGC-42BS	IGC-1067LQ	IG-644
IGC-4236B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IGB-284S	IGC-1144LC	IG-644
IGC-4236C	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IGE-29S	IGC-1067LT	IG-644
IGC-4238	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-2028R	- - -	- - -	IG-644
IGC-4240B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2090	IG-579A	IGC-1085R	IG-776S	IGC-1144RK	- - -
IGC-4241A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1072R	IGB-146S	IGC-1144RC	GE-20
IGC-4246	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RA	IA-77S	IGC-1067RL	IG-644
IGC-4245B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064RA	IGE-29S	IGC-1067RL	IG-644
IGC-4247	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IG-784S	IGC-1144R	- - -
IGC-4251	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IA-77S	IGC-1067RL	- - -
IGC-4251B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGB-130S	IGC-1067RL	- - -
IGC-4253A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGB-130S	IGC-1067RL	- - -
IGC-4253B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGE-29S	IGC-1067RL	- - -
IGC-4259	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1065LA	IGB-130S	IGC-1067LD	- - -
IGC-4262	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-2031R	- - -	- - -	- - -
IGC-4264	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGE-29S	IGC-1144RD	- - -
IGC-4272	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IA-77S	IGC-1067RL	- - -
IGC-4272A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGE-29S	IGC-1067RL	- - -
IGC-4272A-1	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGE-29S	IGC-1067RL	- - -
IGC-4274	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IG-457S	IGC-1067RL	- - -
IGC-4274A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGB-130S	IGC-1067RL	- - -
IGC-4275	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IGE-29S	IGC-1067LP	IG-644
IGC-4276	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2137	IG-579A	IGC-1138R	IG-8178S	IGC-1067RAD	- - -
IGC-4277	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2139	IG-579A	IGC-1105L	IGE-24S	IGC-1067LR	- - -
IGC-4279	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1150R	IGB-130S	IGC-1067RL	- - -
IGC-4279-1	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1150R	IGB-130S	IGC-1067RL	- - -
IGC-4279A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1150R	IGB-312S	IGC-1067RAN	- - -
IGC-4280A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2071	IG-579A	IGC-1064R	IGB-252S	IGC-1067RU	- - -
IGC-4281	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2090	IG-579A	IGC-1085R	IGB-222S	IGC-1144RO	- - -
IGC-4281A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2090	IG-579A	IGC-1085R	IG-775S	IGC-1144RP	- - -
IGC-4281B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2090	IG-579A	IGC-1085R	IGE-30HS	IGC-1067RT	- - -
IGC-4284A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGB-178S	IGC-1144RG	GG-9A
IGC-4285	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGC-42FS	IGC-1067RAD	- - -
IGC-4285A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGE-29S	IGC-1067RL	- - -
IGC-4285B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGE-30HS	IGC-1067RT	GE-87
IGC-4286	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064R	IGE-29S	IGC-1067RL	IG-644A
IGC-4287A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1072L	IGB-349S	IGC-1067LU	IG-261
IGC-4287B	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1072L	IGB-349S	IGC-1067LU	GK-36
IGC-4288	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064L	IG-636MS	IGC-1144LE	IG-644
IGC-4294	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-2028R	- - -	- - -	IG-644
IGC-4296	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2029	IG-579	IGC-1028R	- - -	- - -	IG-644


ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
	IG-2806	1	IGC-4294
	IG-2806J	1	IGC-4296
	IG-2860A	1	IGC-4288
	IG-2860A-1	1	IGC-4241A, IGC-4284A, IGC-4287A, B
	IG-2902	1	IGC-4253A, B
	IG-2902C-2	1	IGC-4275
	IG-2902D	1	IGC-4210A, IGC-4238
	IG-2902E-3	1	IGC-4251, B
	IG-2902F-4	1	IGC-4272, A, IGC-4286
	IGB-1271	1	IGC-4276
	IGB-2154A-1	1	IGC-4277
	IGB-2171A-4	1	IGC-4216B
	IGC-1024AG-2	1	IGC-4279, A
	IGC-1024AL	1	IGC-4280A
	IGC-1024N-6	1	IGC-4209B
	IGC-1024Z-6	1	IGC-4228A
	IGC-2024A-3	1	IGC-4205
	IGC-2024AC-16	1	IGC-4214B
	IGC-2024F-3	1	IGC-4225B, D, F
	IGC-2024F-4	1	IGC-4220A
	IGC-2024G-15	1	IGC-4272A-1
	IGC-2024N-2	1	IGC-4227A, B, C, E, F, IGC-4236A, B, C, IGC-4246, B, IGC-4259, IGC-4262
	IGC-2024N-17	1	IGC-4279-1
	IGC-2084	1	IGC-4247
	IGC-2086A	1	IGC-4240B
	IGC-2155	1	IGC-4281, A, B
	IGC-3024E	1	IGC-4264
	IGC-3024E-1	1	IGC-4214A
	IGH-2062	1	IGC-4274, A
	IGS-2020-1	1	IGC-4285, A, B
	CLIP, Contact Arm Spring	IG-676	1 All
	COLLAR, Shaft	IG-489	1 IGC-4277
	CONTACT, Dist. Cap Plunger	IG-514	1 All
	LOCKWASHERS		
	(A) Breaker Plate Mtg. Sc. #10	12X-196	2 All
	(B) Condenser & Clamp Sc. #6	X-194	2 All
(A) Terminal Sc. #10	12X-196	1 All	
	NUT, Breaker Contact Lock	IB-23	1 All
	OILER, Dist. Base	X-490A	1 All
	PLATE, Breaker	IGC-2012	1 All
	RIVETS		
	(A) Coupling	SW-213	1 IGC-4214A, B, IGC-4220A, IGC-4236A, B, C, IGC-4238, IGC-4246, B, IGC-4275, IGC-4277, IGC-4286, IGC-4288, IGC-4294, IGC-4296
	(A) Gear	GJ-236	1 IGC-4285B
	(A) Gear	SW-213	1 IGC-4241A, IGC-4284A, IGC-4287A, B
	(A) Sleeve	SW-213	1 IGC-4276
	(B) Tubular, Cap Spring	IG-326	2 IGC-4205, IGC-4210A, IGC-4228A, IGC-4238, IGC-4262, IGC-4294, IGC-4296
	(C) Tubular, Cap Spring	X-1448	2 IGC-4209B, IGC-4214A, B, IGC-4216B, IGC-4220A, IGC-4225B, D, F, IGC-4227A, B, C, E, F, IGC-4236A, B, C, IGC-4240B, IGC-4241A, IGC-4246, B, IGC-4247, IGC-4251, B, IGC-4253A, B, IGC-4259, IGC-4264, IGC-4272, A, A-1, IGC-4274, A, IGC-4275, IGC-4276, IGC-4277, IGC-4279, -1, A, IGC-4280A, IGC-4281, A, B, IGC-4284A, IGC-4285, A, B, IGC-4286, IGC-4287A, B, IGC-4288
	(B) Breaker Plate Mtg. Fill. Hd. #10-32x5/16	8X-870	2 IGC-4209B, IGC-4214A, B, IGC-4216B, IGC-4220A, IGC-4225B, D, F, IGC-4227A, B, C, E, F, IGC-4236A, B, C, IGC-4240B, IGC-4241A, IGC-4246, B, IGC-4247, IGC-4251, B, IGC-4253A, B, IGC-4259, IGC-4264, IGC-4272, A, A-1, IGC-4274, A, IGC-4275, IGC-4276, IGC-4277, IGC-4279, -1, A, IGC-4280A, IGC-4281, A, B, IGC-4284A, IGC-4285, A, B, IGC-4286, IGC-4287A, B, IGC-4288
	(B) Breaker Plate Mtg. Fill. Hd. #10-32x3/8	8X-902	2 IGC-4205, IGC-4210A, IGC-4228A, IGC-4238, IGC-4262, IGC-4294, IGC-4296
	(A) Clamp Spring Rd. Hd. #6-32x1/4	8X-302	1 All
(B) Condenser Mtg. Fill. Hd. #6-32x5/32	8X-1546	1 All	
(B) Terminal Fill. Hd. #10-32x1/4	8X-872	1 All	
	SLEEVE, Dist. Drive	IG-447	1 IGC-4276

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Cont.)

Name	Part No.	No. Used	Used On
 SPACER, Cam	IGS-99	1	IGC-4214A, B, IGC-4216B, IGC-4220A, IGC-4225B, D, F, IGC-4227A, B, C, E, F, IGC-4236A, B, C, IGC-4240B, IGC-4241A, IGC-4246B, IGC-4247, IGC-4251, B, IGC-4253A, B, IGC-4259, IGC-4264, IGC-4272, A, A-1, IGC-4274, A, IGC-4275, IGC-4276, IGC-4277, IGC-4279, -1, A, IGC-4280A, IGC-4281, A, B, IGC-4284A, IGC-4285, A, B, IGC-4286, IGC-4287A, B, IGC-4288
SPRINGS			
 (C) Anti-Rattle	IGE-35	1	IGC-4225F, IGC-4227B, IGC-4241A, IGC-4264, IGC-4276, IGC-4280A, IGC-4281, A, B, IGC-4284A, IGC-4285
(C) Anti-Rattle	IGE-36	1	IGC-4214A, B, IGC-4220A, IGC-4236A, B, C, IGC-4275, IGC-4288
(B) Cap Clamp	IG-694	2	All
(A) Contact, Dist. Cap	IG-515A	1	All
WASHERS			
 (A) Thrust, Advance Arm	IG-816	1	IGC-4210A, IGC-4238, IGC-4241A, IGC-4247, IGC-4251, B, IGC-4253A, B, IGC-4262, IGC-4272, A, A-1, IGC-4274, A, IGC-4275, IGC-4284A, IGC-4286, IGC-4287A, B, IGC-4288, IGC-4294, IGC-4296
 (A) Thrust, Advance Arm	IG-816A	1	IGC-4205, IGC-4209B, IGC-4214A, B, IGC-4216B, IGC-4220A, IGC-4225, B, D, F, IGC-4227A, B, C, E, F, IGC-4228A, IGC-4236A, B, C, IGC-4246, B, IGC-4259, IGC-4264, IGC-4279, -1, A, IGC-4280A, IGC-4285, A, B, All
 (B) Thrust, Drive Shaft (Lower)	IG-90	1	All
 (B) Thrust, Drive Shaft (Upper)	IG-90	1	IGC-4205, IGC-4209B, IGC-4210A, IGC-4228A, IGC-4238, IGC-4262, IGC-4294, IGC-4296
(C) Thrust, Drive Shaft (Upper)	IGS-104	1	IGC-4214A, B, IGC-4216B, IGC-4220A, IGC-4225B, D, F, IGC-4227A, B, C, E, F, IGC-4236A, B, C, IGC-4240B, IGC-4246, B, IGC-4247, IGC-4251, B, IGC-4253A, B, IGC-4264, IGC-4272, A, A-1, IGC-4274, A, IGC-4275, IGC-4280A, IGC-4281, A, B, IGC-4284A, IGC-4285, A, B, IGC-4286, IGC-4287A, B, IGC-4288
(D) Thrust, Drive Shaft (Upper)	IGW-46	1	IGC-4241A, IGC-4259, IGC-4276, IGC-4277, IGC-4279, -1, A
WEIGHTS			
 Governor	IG-1322	2	IGC-4216B, IGC-4225D, IGC-4227A, C, E, F, IGC-4246B, IGC-4251, B, IGC-4253A, B, IGC-4272, A, A-1, IGC-4274, A, IGC-4279, -1, IGC-4285A, IGC-4286
Governor	IG-1456	2	IGC-4209B, IGC-4225B, F, IGC-4227B, IGC-4240B, IGC-4241A, IGC-4247, IGC-4264, IGC-4276, IGC-4279A, IGC-4280A, IGC-4281, A, B, IGC-4284A, IGC-4285, B
Governor	IG-2456	2	IGC-4214A, B, IGC-4220A, IGC-4236A, B, C, IGC-4275, IGC-4277, IGC-4287A, B, IGC-4288
Governor	IG-2322	2	IGC-4259
WICKS			
 (A) Felt, Cam Sleeve	IG-495	1	IGC-4209B, IGC-4214A, B, IGC-4216B, IGC-4220A, IGC-4225B, D, F, IGC-4227A, B, C, E, F, IGC-4236A, B, C, IGC-4240B, IGC-4241A, IGC-4246, B, IGC-4247, IGC-4251, B, IGC-4253A, B, IGC-4259, IGC-4264, IGC-4272, A, A-1, IGC-4274, A, IGC-4275, IGC-4276, IGC-4277, IGC-4279, -1, A, IGC-4280A, IGC-4281, A, B, IGC-4284A, IGC-4285, A, B, IGC-4286, IGC-4287A, B, IGC-4288
 (B) Felt, Oiler	IGS-117	1	IGC-4205, IGC-4209B, IGC-4210A, IGC-4225B, IGC-4227A, B, C, E, F, IGC-4228A, IGC-4238, IGC-4240B, IGC-4262, IGC-4264, IGC-4274, A, IGC-4276, IGC-4277, IGC-4279, -1, A, IGC-4280A, IGC-4281, A, B, IGC-4285, A, B, IGC-4287A, B, IGC-4288, IGC-4294, IGC-4296


ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4400 SERIES DISTRIBUTOR PARTS LISTS

IGC-4400 Series
(Issued 8-20-51)

Model No.	No. Cyl.	CUSTOMER
IGC-4401, -1	6	Dodge Truck
IGC-4401A, -1	6	Chrysler Marine
IGC-4401C, -1	6	Chrysler Marine
IGC-4402, -1	6	Chrysler Industrial, Dodge Truck
IGC-4402A, -1	6	Dodge Truck
IGC-4403, -1	6	Dodge Truck
IGC-4403A, -1	6	Chrysler Marine
IGC-4404A, -1	6	Dodge Truck
IGC-4406, -1	6	Dodge Truck
IGC-4406A, -2	6	Chrysler Marine
IGC-4007, -1	6	Chrysler Industrial, Dodge Truck
IGC-4407A, -1	6	Dodge Truck
IGC-4407B, -1	6	Dodge Truck
IGC-4407C, -1	6	Chrysler Industrial, Chrysler Marine
IGC-4407D, -1	6	Chrysler Industrial, Dodge Truck
IGC-4407E, -1	6	Chrysler Industrial
IGC-4408, -1	6	Dodge Truck
IGC-4409A	6	Reo Truck
IGC-4410	6	Gray Marine
IGC-4411	6	Gray Marine
IGC-4413	6	White Motor
IGC-4414, -1	6	Dodge Truck
IGC-4415	6	Nash 6
IGC-4417	6	Checker Cab

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS


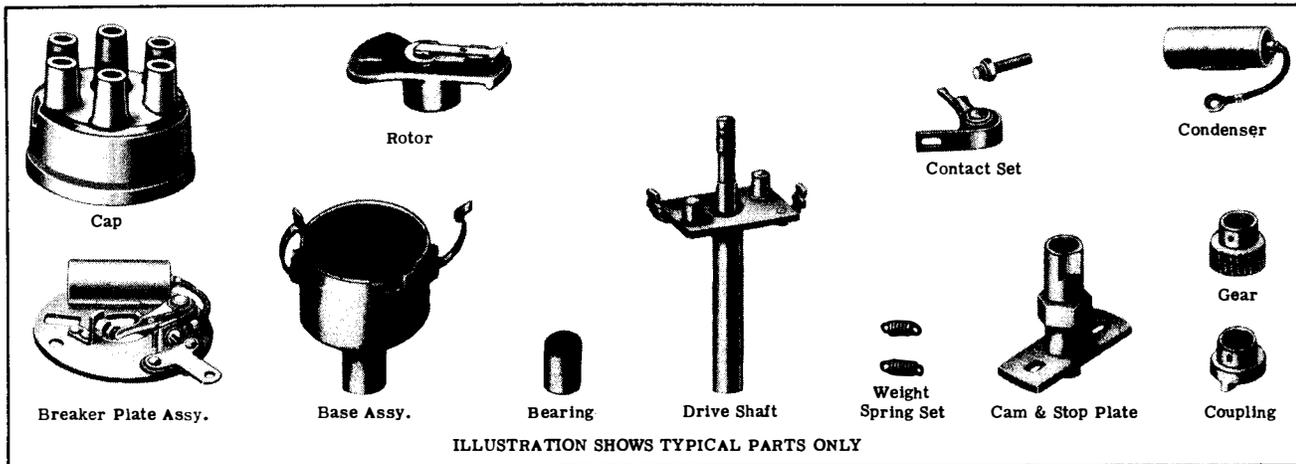


Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam Stop Plate	Gear or Coupling
IGC-4401, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2001A	IG-579A	IGS-1024RA	IGC-42ES	IGS-1100RH	---
IGC-4401A, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2001A	IG-579A	IGS-1024RA	IG-775S	IGS-1100RN	---
IGC-4401C, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2001A	IG-579A	IGS-1024RA	IG-636DS	IGS-1100RH	---
IGC-4402, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2001A	IG-579A	IGS-1025RD	IG-636DS	IGS-1100RC	---
IGC-4402A, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2001A	IG-579A	IGS-1025RA	IG-636SS	IGS-1100RO	---
IGC-4403, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1002R	IGC-119S	IGS-1100RH	---
IGC-4403A, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1002RA	IG-775S	IGS-1100RN	---
IGC-4404A, -1	IGC-1123B*	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2001A	IG-579A	IGS-1040RA	IGC-120S	IGS-1100RAC	IGL-44
IGC-4406, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1042R	IGC-119S	IGS-1100RH	---
IGC-4406A, -2	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1042RA	IG-775S	IGS-1100RN	---
IGC-4407, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1054RB	IGB-208S	IGS-1100RO	---
IGC-4407A, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1054RB	IGC-118S	IGS-1100RH	---
IGC-4407B, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1054RB	IGC-119S	IGS-1100RH	---
IGC-4407C, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1054RA	IG-636DS	IGS-1100RH	---
IGC-4407D, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1054RB	IGB-208S	IGS-1100RD	---
IGC-4407E, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2028A	IG-579A	IGS-1054RF	IG-636NS	IGS-1100R	---
IGC-4408, -1	IGC-1107S	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2061	IG-579A	IGS-1060R	IG-636FS	IGS-1100RD	IGC-133
IGC-4409A	IGC-1123B*	IGS-1016B	IGP-3028A	IG-2671	IGC-3012	IGS-2062B	IG-579A	IGS-1053RC	IG-784S	IGS-1100RL	---
IGC-4410	IGC-1123L**	IGS-1016B	IGP-3028A	IG-2671	IGC-3012	IGS-2064	IG-579A	IGS-1065L	IGB-293S	IGS-1100L	---
IGC-4411	IGC-1123B*	IGS-1016B	IGP-3028A	IG-2671	IGC-3012	IGS-2066	IG-579A	IGS-1063R	IGB-284S	IGS-1100RM	---
IGC-4413	IGC-1107S	IGS-1016B	IGP-3028A	IG-2671	IGC-3012	IGS-2068	IG-579A	IGS-1053R	IG-884S	IGS-1100RJ	IGC-136
IGC-4414, -1	IGC-1123B*	IGS-1016B	IGP-3028A	IG-3927C	IGC-3012C	IGS-2061	IG-579A	IGS-1060R	IG-636FS	IGS-1100RE	IGC-133
IGC-4415	IGC-1123B*	IGS-1016B	IGP-3028A	IG-2671	IGC-3012	IGS-2071	IG-579A	IGS-1070R	IG-817SS	IGS-1022RQ	---
IGC-4417	IGC-1107S	IGS-1016B	IGP-3028A	IG-2671	IGC-3012	IGS-2041A	IG-579A	IGS-1053RA	IGC-42CS	IGS-1100RH	IG-644

* IGC-1124 Dist. Cap Cover.



** IGC-1124L Dist. Cap Cover.

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS				
Name	Part No.	No. Used	Used On	
	ARM, Advance	IG-2860A-3	1	IGC-4410, IGC-4411
		IGB-1271	1	IGC-4415
		IGC-1134	1	IGC-4408-1, IGC-4414-1
		IGC-2024AF-13	1	IGC-4409A
		IGS-1020	1	IGC-4417
		IGS-1020S	1	IGC-4404A-1, IGC-4406-1
		IGS-1027S	1	IGC-4401-1, A-1, C-1, IGC-4402-1, A-1, IGC-4403-1, A-1, IGC-4406A-2, IGC-4407-1, A-1, B-1, C-1, D-1, E-1
	CLIP, Contact Arm Spring	IG-676	1	All
	COLLARS (A) Shaft (B) Shaft	IGB-199	1	IGC-4410, IGC-4411
		IGS-198	1	IGC-4401, -1, A, A-1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, A, A-1, IGC-4406, -1, A, A-2, IGC-4407, -1, A, A-1, B, B-1, C, C-1, D, D-1, E, E-1
	CONTACT, Dist. Cap Plunger	IG-514	1	All
	COVER, Terminal Slot	IGC-117	1	All
	COVERS Dist. Cap	IGC-1124	1	IGC-4404A, A-1, IGC-4409A, IGC-4411, IGC-4414, -1, IGC-4415
	Dist. Cap	IGC-1124L	1	IGC-4410
	CUP, Grease	X-382	1	IGC-4401, -1, A, A-1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, A, A-1, IGC-4404A, A-1, IGC-4406, -1, A-2, IGC-4407, -1, A, A-1, B, B-1, C, C-1, D, D-1, E, E-1, IGC-4408, -1, IGC-4413, IGC-4414, -1, IGC-4417
	GASKET, Dist. Cap Cover	IGB-230	3	IGC-4404A, -1, IGC-4409A, IGC-4410, IGC-4411, IGC-4414, -1, IGC-4415
	LOCKWASHERS (A) Condenser & Clamp Sc. #6 (B) Terminal Screw #10	X-194	2	All
		X-196	1	IGC-4409A, IGC-4410, IGC-4411, IGC-4413, IGC-4415, IGC-4417
	NUT, Breaker Contact Lock	IB-23	1	All
	OILER, Dist. Base	X-490A	1	IGC-4409A, IGC-4410, IGC-4411, IGC-4415
	PLATE, Breaker	IGC-2012	1	All
	PLUG, Rubber Dist. Cap Vent. Hole	IGS-32	1	IGC-4401, -1, A, A-1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, A, A-1, IGC-4406, -1, A, A-2, IGC-4407, IGC-4407-1, A, A-1, B, B-1, C, C-1, D, D-1, E, E-1, IGC-4408, -1, IGC-4413, IGC-4417
	POINTERS Advance Arm Advance Arm	IGC-135	1	IGC-4408-1, IGC-4414-1
		IGS-21	1	IGC-4403-1, IGC-4404A-1, IGC-4406-1, A-2, IGC-4417
	RIVETS (A) Collar, Coupling or Sleeve (B) Tubular, Cap Spring	SW-213	1	All
		X-1448	2	All
	SCREWS (A) Breaker Plate Mtg. Fill. Hd. #10-32x5/16 (B) Clamp Spring Rd. Hd. #6-32x1/4 (A) Condenser Mtg. Fill. Hd. #6-32x5/32 (C) Dist. Cap Cover, Ctsk. Hd. #8-32x3/4 (A) Terminal, Fill. Hd. #10-32x1/4	8X-870	2	All
		8X-302	1	All
		8X-1546	1	All
		8X-1340	3	IGC-4404A, -1, IGC-4409A, IGC-4410, IGC-4411, IGC-4414, -1, IGC-4415
		8X-872	1	IGC-4409A, IGC-4410, IGC-4413, IGC-4415, IGC-4417
	SLEEVE, Dist. Drive	IG-447	1	IGC-4415
	SNAP RING, Cam Retaining	IG-680	1	All
	SPACER, Cam	IGS-99	1	All
	SPRINGS (A) Anti-Rattle (A) Anti-Rattle (B) Cap Clamp (C) Contact, Dist. Cap	IGT-69	1	IGC-4410
		IGT-70	1	IGC-4401, -1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, IGC-4404A, -1, IGC-4406, -1, IGC-4407, -1, A, A-1, B, B-1, C, C-1, D, D-1, E, E-1, IGC-4408, -1, IGC-4409A, IGC-4411, IGC-4413, IGC-4414, -1, IGC-4415, IGC-4417
		IG-694	2	All
		IG-515A	1	All

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Continued)

	Name	Part No.	No. Used	Used On
	WASHERS			
	(A) Breaker Plate Mtg. Skpf. #10	X-1270	2	All
	(B) Thrust, Advance Arm	IG-816	1	IGC-4410, IGC-4411
	(B) Thrust, Advance Arm	IG-816A	1	IGC-4409A, IGC-4417
	(C) Thrust, Drive Shaft (Lower)	IG-90	1	IGC-4401, -1, A, A-1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, A, A-1, IGC-4404A, A-1, IGC-4406, -1, A, A-2, IGC-4407, -1, A, A-1, B, B-1, C, C-1, D, D-1, E, E-1, IGC-4409A, IGC-4410, IGC-4411, IGC-4413, IGC-4415, IGC-4417
	(C) Thrust, Drive Shaft (Lower)	IG-90A	1	IGC-4408, -1, IGC-4414, -1
(D) Thrust, Drive Shaft (Upper)	IGS-104	1	IGC-4401, -1, A, A-1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, A, A-1, IGC-4404A, A-1, IGC-4406, -1, A, A-2, IGC-4407, -1, A, A-1, B, B-1, C, C-1, D, D-1, E, E-1, IGC-4408, -1, IGC-4409A, IGC-4410, IGC-4411, IGC-4413, IGC-4415, IGC-4417	
(E) Thrust, Drive Shaft (Upper)	IGW-46	1	IGC-4415	
	WEIGHTS			
	Governor	IG-1322	2	IGC-4401A, A-1, IGC-4403A, A-1, IGC-4406A, A-2
	Governor	IG-1456	2	IGC-4401, -1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, IGC-4404A, A-1, IGC-4406, -1, IGC-4407, -1, A, A-1, B, B-1, IGC-4407C, C-1, D, D-1, E, E-1, IGC-4408, -1, IGC-4409A, IGC-4411, IGC-4413, IGC-4414, -1, IGC-4415, IGC-4417
	Governor	IG-2456	2	IGC-4410
	WICKS			
	(A) Felt, Cam Sleeve	IGH-28	1	All
	(B) Felt, Oiler	IGS-117	1	IGC-4410, IGC-4411, IGC-4415
	(B) Felt, Grease Cup	IGS-117A	1	IGC-4401, -1, A, A-1, C, C-1, IGC-4402, -1, A, A-1, IGC-4403, -1, A, A-1, IGC-4404A, A-1, IGC-4406, -1, A, A-2, IGC-4407, -1, A, A-1, B, B-1, C, C-1, D, D-1, E, E-1, IGC-4408, -1, IGC-4413, IGC-4414, -1


ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4500 SERIES DISTRIBUTOR PARTS LIST

IGC-4500 SERIES
(Issued 10-24-55)

Model No.	No. Cyl.	CUSTOMER
IGC-4501, -1	6	Dodge Truck, Chrysler Industrial
IGC-4501-2	6	Dodge Truck
IGC-4502-1	6	Dodge Truck
IGC-4502A-1	6	Dodge Truck
IGC-4503	6	Packard
IGC-4505	6	Packard
IGC-4506, -1	6	Chrysler Industrial
IGC-4508-1	6	Dodge Truck
IGC-4508A-1	6	Dodge Truck, Chrysler Industrial
IGC-4508B-1	6	Dodge Truck, Chrysler Industrial
IGC-4510-1M	6	Chrysler Marine
IGC-4511-1M	6	Chrysler Marine
IGC-4512	6	Nash 6
IGC-4513	6	Willys 6
IGC-4514	6	Willys 6
IGC-4515-1	6	Dodge Truck
IGC-4515A-1	6	Dodge Truck
IGC-4516-1	6	Dodge Truck
IGC-4517-1	6	Dodge Truck
IGC-4517A-1	6	Dodge Truck
IGC-4518-1	6	Dodge Truck
IGC-4518A-1	6	Dodge Truck



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

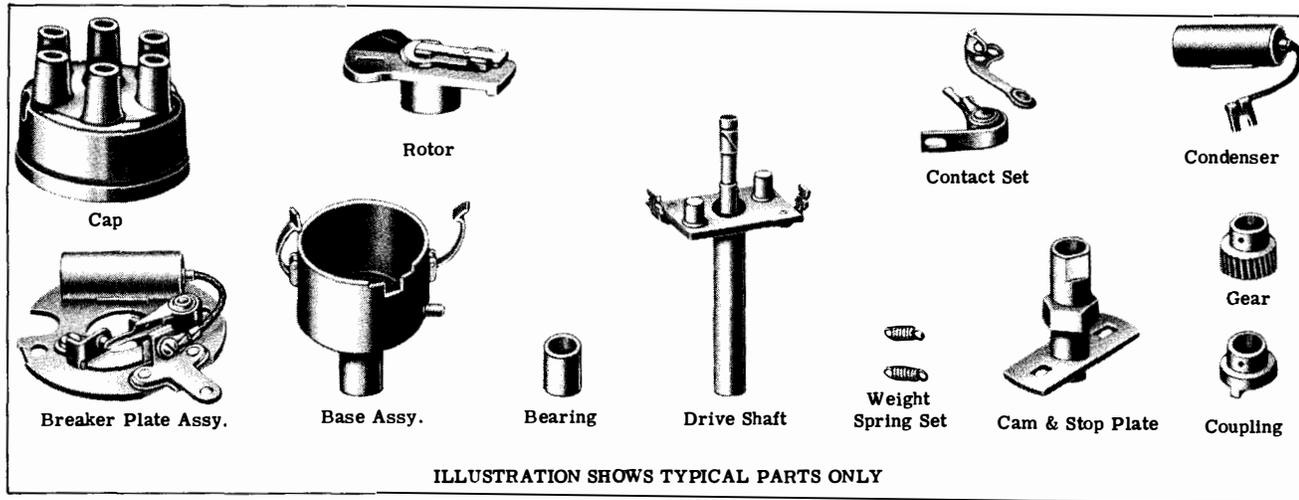

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-4501,-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2028A	IG-579A	IGS-1081RB	IG-636HS	IGS-1100RA	- - -
IGC-4501-2	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2028A	IG-579A	IGS-1081RB	IG-636HS	IGS-1100RA	- - -
IGC-4502-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2061	IG-579A	IGS-1060R	IG-636FS	IGS-1100RD	IGC-133
IGC-4502A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2061	IG-579A	IGS-1060R	IG-636AS	IGS-1100RC	IGC-133
IGC-4503	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3128	IGC-2148	IGS-2109'	IG-579A	IGT-1020LB	IGB-293S	IGS-1100LA	- - -
IGC-4505	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3128	IGC-2148	IGC-2160	IG-579A	IGT-1020LB	IGB-293S	IGS-1100LA	- - -
IGC-4506,-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2028A	IG-579A	IGS-1024RC	IG-636HS	IGS-1100RB	- - -
IGC-4508-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2120	IG-579A	IGS-1060R	IG-636AS	IGS-1100RC	IGC-133
IGC-4508A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2120	IG-579A	IGS-1060R	IG-636HS	IGS-1100R	IGC-133
IGC-4508B-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2120	IG-579A	IGS-1060R	IG-636HS	IGS-1100RW	IGC-133
IGC-4510-1M	IGC-1123C*	IGS-1016B	IGP-3028VS	IG-3927K	IGC-2148G	IGS-2028B	IG-579A	IGS-1054RJ	IG-636NS	IGS-1100RA-3	- - -
IGC-4511-1M	IGC-1123C*	IGS-1016B	IGP-3028VS	IG-3927K	IGC-2148G	IGS-2028B	IG-579A	IGS-1154RA	IGB-292SS	IGS-1100RAD	- - -
IGC-4512	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2188	IG-579A	IGS-1187L	IGB-327FS	IGS-1100LV	- - -
IGC-4513	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2190	IG-579A	IGS-1189L	IGB-336AS	IGS-1100LM	- - -
IGC-4514	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2192	IG-579A	IGS-1189L	IGB-336AS	IGS-1100LM	- - -
IGC-4515-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2200	**IG-579A	IGS-1199R	IG-636HS	IGS-1100RW	†IGC-133
IGC-4515A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2200	**IG-579A	IGS-1199R	IG-636HS	IGS-1100R	†IGC-133
IGC-4516-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2144	**IG-579A	IGS-1124RA	IG-636QS	IGS-1100RA	↑
IGC-4517-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2200	**IG-579A	IGS-1199RA	IG-636HS	IGS-1100RW	†IGC-133
IGC-4517A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2200	**IG-579A	IGS-1199RA	IG-636HS	IGS-1100R	†IGC-133
IGC-4518-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2144	**IG-579A	IGS-1124RB	IG-636QS	IGS-1100RA	↑
IGC-4518A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2144	**IG-579A	IGS-1124RB	IGB-292SS	IGS-1100RX	↑



† See Miscellaneous Parts Section For Tachometer Drive Gears.
 ** See Miscellaneous Parts Section For Other Bearings.
 * IGC-1124B Dist. Cap Cover.

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
 ARM, Advance	IGC-1134	1	IGC-4502-1, A-1, IGC-4508-1, A-1, B-1, IGC-4515-1, A-1, IGC-4517-1, A-1
	IGS-1020	1	IGC-4501-1, IGC-4506-1, IGC-4516-1, IGC-4518-1, A-1
	IGS-1020-2	1	IGC-4510-1M, IGC-4511-1M
	IGT-1044 IGT-2087	1 1	IGC-4503 IGC-4501-2
 BEARING, Ball S. A. E. 202 Tach. Drive	X-294	1	IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1
 BRACKETS (A) Vacuum Control (B) Vacuum Chamber (B) Vacuum Chamber	IGC-161	1	IGC-4505, IGC-4513, IGC-4514
	VC-107	1	IGC-4505
	VC-151	1	IGC-4513, IGC-4514
 CLAMPS (A) Plunger Link Screw (B) Vacuum Chamber Bracket (B) Vacuum Chamber Bracket	IGW-122	1	IGC-4505, IGC-4513, IGC-4514
	VC-106	1	IGC-4505
	VC-152	1	IGC-4513, IGC-4514
 CLIPS (A) Contact Arm Spring (B) Vacuum Control Link	IG-676	1	All
	IGW-118	1	IGC-4505, IGC-4513, IGC-4514
 COLLARS (A) Dist. Shaft (B) Dist. Shaft	IGB-199	1	IGC-4513, IGC-4514
	IGS-198	1	IGC-4501,-1,-2, IGC-4506,-1, IGC-4510-1M, IGC-4511-1M, IGC-4512, IGC-4516-1, IGC-4518-1, A-1
CONTACT, Dist. Cap Plunger	IG-514	1	All

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Continued)

Name	Part No.	No. Used	Used On	
 COVERS (A) Dist. Cap (B) Terminal Slot (C) Tachometer Shaft Housing	IGC-1124B	1	IGC-4510-1M, IGC-4511-1M	
	IGC-117	1	All	
	IGS-38	1	IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
 CUP, Grease	X-382	1	IGC-4501, -1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4516-1, IGC-4518-1, A-1	
X-382A	1	IGC-4510-1M, IGC-4511-1M		
 GASKETS (A) Dist. Cap Cover (B) Vacuum Chamber Plug	IGB-230	3	IGC-4510-1M, IGC-4511-1M	
	VC-14	1	IGC-4505, IGC-4513, IGC-4514	
 GEARS (A) Tachometer Drive (B) Tachometer Follower	GE-47	1	IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
	GE-48	1	IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
 LEAD, Ground	DG-107	1	IGC-4505, IGC-4513, IGC-4514	
 LOCKWASHERS (A) Condenser & Clamp Sc. #6 (B) Terminal Sc. #10 (B) Vacuum Bracket Clamp Sc. #10 (B) Vacuum Chamber Mtg. #10 (B) Vacuum Control Bracket to Base #10 (A) Vacuum Control Link Sc. #8	12X-194	2	All	
	12X-196	1	IGC-4503, IGC-4505, IGC-4512, IGC-4513, IGC-4514	
	12X-196	1	IGC-4505	
	12X-196	2	IGC-4505, IGC-4513, IGC-4514	
	12X-196	2	IGC-4505, IGC-4513, IGC-4514	
	12X-195	1	IGC-4505, IGC-4513, IGC-4514	
 NUT; Vacuum Chamber Mtg. Hex. #10-32	8X-173	2	IGC-4505, IGC-4513, IGC-4514	
 OILERS (A) Elbow Oiler (B) Sleeve Oiler (A) Elbow Oiler	X-488	1	IGC-4508-1, A-1, B-1	
	X-490A	1	IGC-4512, IGC-4513, IGC-4514	
	X-1590	1	IGC-4515-1, A-1, IGC-4517-1, A-1	
 PLATE, Breaker	IGC-1148	1	IGC-4501, -1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4508-1, A-1, B-1, IGC-4512, IGC-4513, IGC-4514, IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
	IGC-1148B	1	IGC-4510-1M, IGC-4511-1M	
 PLUGS (A) Rubber Vent. Hole (B) Vacuum Chamber	IGS-32	1	IGC-4501, -1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4508-1, A-1, B-1, IGC-4512, IGC-4513, IGC-4514, IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1	
	VC-15	1	IGC-4505, IGC-4513, IGC-4514	
 POINTER, Advance Arm	IGC-135	1	IGC-4502-1, A-1, IGC-4508-1, A-1, B-1, IGC-4515-1, A-1	
	IGS-21	1	IGC-4516-1, IGC-4518-1, A-1	
 RIVETS (A) Collar (A) Coupling (A) Extension Shaft (A) Gear, Tachometer Driver (A) Sleeve (B) Tubular, Cap Spring (B) Tubular, Cap Spring	SW-213	1	IGC-4501, -1, -2, IGC-4506, -1, IGC-4510-1M, IGC-4511-1M, IGC-4512, IGC-4513, IGC-4514, IGC-4516-1, IGC-4518-1, A-1	
	SW-213	1	IGC-4502-1, A-1, IGC-4508-1, A-1, B-1, IGC-4515-1, A-1, IGC-4517-1, A-1	
	IGH-55	1	IGC-4503, IGC-4505	
	SW-213	1	IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
	SW-213	1	IGC-4503, IGC-4505	
	X-1448	2	IGC-4501, -1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4508-1, A-1, B-1, IGC-4512, IGC-4513, IGC-4514, IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
	8X-2893	2	IGC-4510-1M, IGC-4511-1M	
	 SCREWS (A) Breaker Contact Lock Fill. Hd. #8-32x3/16 (A) Breaker Contact Lock Fill. Hd. #8-32x3/16 (A) Breaker Plate Mtg. Fill. Hd. #10-32x5/16 (A) Breaker Plate Mtg. Fill. Hd. #10-32x5/16 (B) Clamp Spring Hex. Hd. #6-32x5/16 (C) Clamp Spring Rd. Hd. #6-32x1/4 (A) Condenser Mtg. Fill. Hd. #6-32x5/32 (A) Condenser Mtg. Fill. Hd. #6-32x5/32 (D) Dist. Cap Cover Ctsk. Hd. #8-32x3/4 (A) Terminal Fill. Hd. #10-32x1/4	8X-884	1	IGC-4501-1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4508-1, A-1, B-1, IGC-4512, IGC-4513, IGC-4514, IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1
		19X-884	1	IGC-4510-1M, IGC-4511-1M
		8X-870	2	IGC-4501, -1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4508-1, A-1, B-1, IGC-4512, IGC-4513, IGC-4514, IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1
19X-870		2	IGC-4510-1M, IGC-4511-1M	
IGC-175		1	IGC-4510-1M, IGC-4511-1M	
8X-302		1	IGC-4501, -1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4508-1, A-1, B-1, IGC-4512, IGC-4513, IGC-4514, IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
8X-1546		1	IGC-4501, -1, -2, IGC-4502-1, A-1, IGC-4503, IGC-4505, IGC-4506, -1, IGC-4508-1, A-1, B-1, IGC-4512, IGC-4513, IGC-4514, IGC-4515-1, A-1, IGC-4516-1, IGC-4517-1, A-1, IGC-4518-1, A-1	
19X-1546		1	IGC-4510-1M, IGC-4511-1M	
X-2932		3	IGC-4510-1M, IGC-4511-1M	
8X-872		1	IGC-4503, IGC-4505, IGC-4512, IGC-4513, IGC-4514	

Screw Data Continued on Next Page

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4500 SERIES DISTRIBUTOR PARTS LIST

IGC-4500 SERIES
(Issued 10-24-55)


Model No.	No. Cyl.	CUSTOMER
IGC-4501, -1	6	Dodge Truck, Chrysler Industrial
IGC-4501-2	6	Dodge Truck
IGC-4502-1	6	Dodge Truck
IGC-4502A-1	6	Dodge Truck
IGC-4503	6	Packard
IGC-4505	6	Packard
IGC-4506, -1	6	Chrysler Industrial
IGC-4508-1	6	Dodge Truck
IGC-4508A-1	6	Dodge Truck, Chrysler Industrial
IGC-4508B-1	6	Dodge Truck, Chrysler Industrial
IGC-4510-1M	6	Chrysler Marine
IGC-4511-1M	6	Chrysler Marine
IGC-4512	6	Nash 6
IGC-4513	6	Willys 6
IGC-4514	6	Willys 6
IGC-4515-1	6	Dodge Truck
IGC-4515A-1	6	Dodge Truck
IGC-4516-1	6	Dodge Truck
IGC-4517-1	6	Dodge Truck
IGC-4517A-1	6	Dodge Truck
IGC-4518-1	6	Dodge Truck
IGC-4518A-1	6	Dodge Truck

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4600 SERIES DISTRIBUTOR PARTS LISTS

IGC-4600 Series
(Issued 1-25-52)

Model No.	No. Cyl.	CUSTOMER
IGC-4601	6	Brockway, Continental
IGC-4601-1	6	Brockway
IGC-4601-2	6	Brockway
IGC-4601A-1	6	Brockway
IGC-4601A-2	6	Brockway
IGC-4602	6	Brockway
IGC-4604	4	White Motor
IGC-4605	4	White Motor
IGC-4606	6	Ward La France
IGC-4606A	6	Ward La France
IGC-4607	6	International Harvester
IGC-4608	6	International Harvester

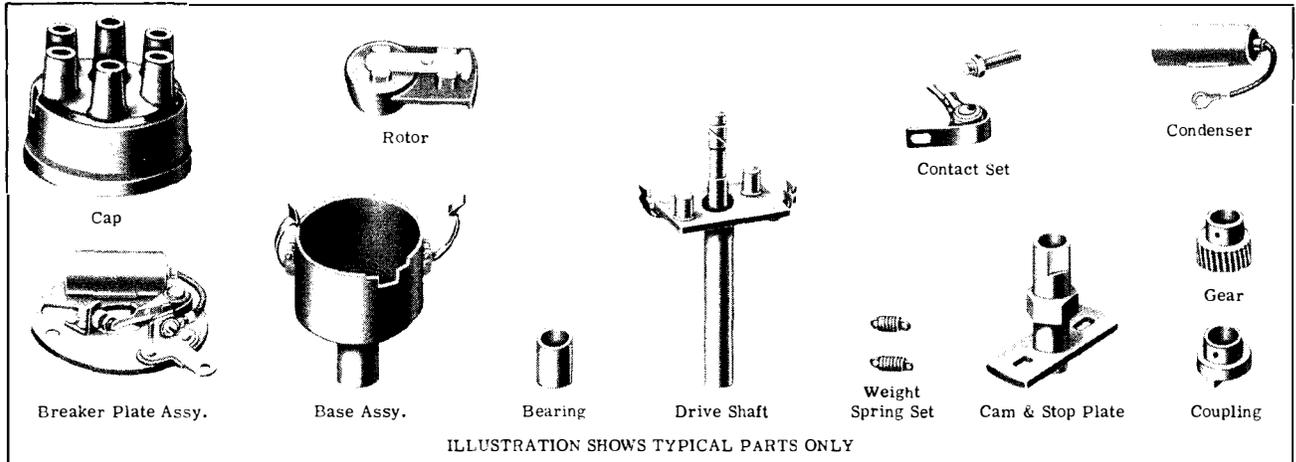

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-4601	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064LE	IGB-284S	IGC-1144LC	IG-644
IGC-4601-1	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064LE	IGB-284S	IGC-1144LC	IG-644
IGC-4601-2	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064LE	IGB-284S	IGC-1144LC	IG-644
IGC-4601A-1	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064LF	IGB-222S	IGC-1067LW	IG-644
IGC-4601A-2	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064LF	IGB-222S	IGC-1067LW	IG-644
IGC-4602	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1064LE	IGB-284S	IGC-1144LC	IG-644
IGC-4604	IG-1324	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2169	IG-579A	IGC-1170R	IGB-165S	IGC-1067RAE	---
IGC-4605	IG-1324A	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2174	IG-579A	IGC-1173L	IGB-165S	IGC-1067LV	---
IGC-4606	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1186L	IG-817AS	IGC-1067LQ	IGC-1180
IGC-4606A	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2063	IG-579A	IGC-1186L	IG-636QS	IGC-1067LX	IGC-1180
IGC-4507	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2193	IG-579A	IGC-1194R	IG-913SS	IGC-1067RAL	---
IGC-4608	IG-1323	IG-1320	IGP-3028A	IG-2671	IGC-3012	IGC-2196	IG-579A	IGC-1072LA	IG-796AS	IGC-1067LG	---

(See Reverse Side for Miscellaneous Parts.)




File in
Equipment & Parts List Binder

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4600 SERIES DISTRIBUTOR PARTS LISTS

IGC-4600 Series
(Issued 1-25-52)

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
	ARM, Advance	IGB-1154A	1 IGC-4605
		IGC-1024N-6	1 IGC-4604
		IGC-2049A-1	1 IGC-4601-1, A-1
		IGC-2068A-1	1 IGC-4601
		IGC-2068B	1 IGC-4602
		IGC-2084A	1 IGC-4606, A
		IGH-2062C	1 IGC-4601-2, A-2
	CLIP, Contact Arm Spring	IG-676	1 All
	COLLARS	IGB-199	1 IGC-4604, IGC-4605
	(A) Shaft	IGC-192	1 IGC-4607
	(B) Shaft	IGC-195	1 IGC-4608
	(C) Shaft		
	CONTACT, Dist. Cap Plunger	IG-514	1 All
	LOCKWASHERS		
	(A) Breaker Plate Mtg. #10	12X-196	2 All
	(B) Condenser & Clamp Sc. #6	X-194	2 All
	(A) Terminal Screw #10	12X-196	1 All
	NUT, Breaker Contact Lock	IB-23	1 All
	OILERS		
	(A) Elbow, Dist. Base	X-488	1 IGC-4604
	(B) Sleeve, Dist. Base	X-490A	1 IGC-4601, -1, -2, A-1, A-2, IGC-4602, IGC-4605, IGC-4606, A, IGC-4607, IGC-4608
	PLATE, Breaker	IGC-2012	1 All
	RIVETS		
	(A) Collar, Shaft	SW-213	1 IGC-4604, IGC-4605, IGC-4607
	(A) Coupling, Shaft	GJ-236	1 IGC-4608
	(A) Coupling, Shaft	SW-213	1 IGC-4601, -1, -2, A-1, A-2, IGC-4602, IGC-4606, A
	(B) Tubular, Cap Spring	X-1448	2 All
	SCREWS		
	(B) Breaker Plate Mtg. Fill. Hd. #10-32x5/16	8X-870	2 All
	(A) Clamp Spring Rd. Hd. #6-32x1/4	8X-302	1 All
	(B) Condenser Mtg. Fill. Hd. #6-32x5/32	8X-1546	1 All
	(3) Terminal, Fill. Hd. #10-32x1/4	8X-872	1 All
	SPACER, Cam	IGS-99	1 All
	SPRINGS		
	(A) Anti-Rattle	IGE-35	1 IGC-4607
	(A) Anti-Rattle	IGE-36	1 IGC-4601, -1, -2, A-1, A-2, IGC-4602, IGC-4606, A
	(B) Cap Clamp	IG-694	2 All
	(C) Contact, Dist. Cap	IG-515A	1 All
	WASHERS		
	(A) Thrust, Advance Arm	IG-816	1 IGC-4601, -1, -2, A-1, A-2, IGC-4602, IGC-4604, IGC-4605, IGC-4606, A
	(B) Thrust, Drive Shaft (Lower)	IG-90	1 All
	(C) Thrust, Drive Shaft (Upper)	IGS-104	1 All
	WEIGHTS		
	Governor	IGC-2168L	2 IGC-4601, -1, -2, A-1, A-2, IGC-4602, IGC-4605, IGC-4606, A, IGC-4608
	Governor	IGC-2168R	2 IGC-4604, IGC-4607
	WICKS		
	(A) Felt, Cam Sleeve	IG-495	1 All
	(B) Felt, Oiler	IGS-117	1 IGC-4604, IGC-4605, IGC-4606, A, IGC-4607, IGC-4608

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4700 SERIES DISTRIBUTOR PARTS LISTS

IGC-4700 SERIES


(Issued 2-1-52)

Model No.	No. Cyl.	CUSTOMER
IGC-4702A	6	Buffalo Springfield Roller
IGC-4703A	6	Dodge Truck
IGC-4703A-1	6	Chrysler Industrial, Dodge Truck
IGC-4705	4	Willys (U.S. Gov. Jeep)
IGC-4710-1	6	Continental
IGC-4710-2	6	Four Wheel Drive, Harnischfeger
IGC-4710A-1	6	Continental, Onan
IGC-4711	4	Willys, Valentine Welder
IGC-4713A	6	Continental
IGC-4721	6	Chrysler Industrial
IGC-4721-1	6	Chrysler Industrial
IGC-4723M	6	Chrysler Industrial, Chrysler Marine
IGC-4723-1M	6	Chrysler Industrial, Chrysler Marine
IGC-4724M	6	Chrysler Marine
IGC-4724-1M	6	Chrysler Marine
IGC-4725-1M	6	Chrysler Marine

File in
Equipment & Parts List Binder

Printed in U. S. A.

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

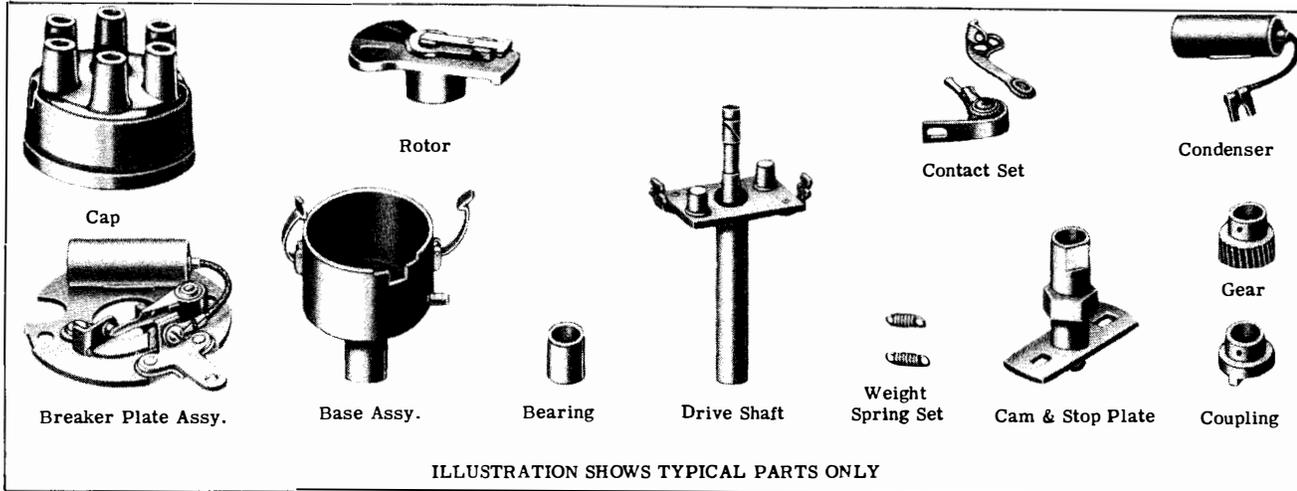

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-4702A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053RC	IGE-29S	IGS-1100RW	- - -
IGC-4703A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2127A	IG-579A	IGS-1113R	IGB-292SS	IGS-1100RA	- - -
IGC-4703A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2127A	IG-579A	IGS-1113R	IGB-292SS	IGS-1100RA	- - -
IGC-4705	IG-1324	IG-1657R	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2135	IG-579A	IGS-1134L	IGB-202S	IGC-1132LB	- - -
IGC-4710-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053LB	IG-636PS	IGS-1100LG	IG-644A
IGC-4710-2	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053LB	IGC-42BS	IGS-1100LN	IG-644A
IGC-4710A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053LB	IGC-42CS	IGS-1100LH	IG-644A
IGC-4711	IG-1324	IG-1657R	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2142	IG-579A†	IGS-1141L	IGB-202S	IGC-1132LB	†
IGC-4713A	IGC-1123L*	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053LB	IG-775S	IGS-1100LJ	IG-644A
IGC-4721	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2127A	IG-579A	IGS-1112R	IG-636NS	IGS-1100R	- - -
IGC-4721-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2127A	IG-579A	IGS-1112R	IG-636NS	IGS-1100R	- - -
IGC-4723M	IGC-1107S	IGS-1016B	IGP-3028VS	IGW-3139	IGC-2148F	IGS-2028B	IG-579A	IGS-1054RG	IG-636NS	IGS-1100R	- - -
IGC-4723-1M	IGC-1107S	IGS-1016B	IGP-3028VS	IGW-3139	IGC-2148F	IGS-2028B	IG-579A	IGS-1054RG	IG-636NS	IGS-1100R	- - -
IGC-4724M	IGC-1107S	IGS-1016B	IGP-3028VS	IGW-3139	IGC-2148F	IGS-2028B	IG-579A	IGS-1154R	IG-636HS	IGS-1100RX	- - -
IGC-4724-1M	IGC-1107S	IGS-1016B	IGP-3028VS	IGW-3139	IGC-2148F	IGS-2028B	IG-579A	IGS-1154R	IG-636HS	IGS-1100RX	- - -
IGC-4725-1M	IGC-1123B**	IGS-1016B	IGP-3028VS	IGW-3139	IGC-2148F	IGS-2028B	IG-579A	IGS-1054RH	IG-636NS	IGS-1100RL	- - -



* IGC-1124L Dist. Cap Cover.

** IGC-1124 Dist. Cap Cover.

† See Miscellaneous Parts Section for Other Bearings.

‡ See Miscellaneous Parts Section for Other Gears.

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS				
Name	Part No.	No. Used	Used On	
 ARM, Advance	IG-2860A IGC-2024N-2 IGS-114 IGS-1020 IGS-1020-2 IGS-1080	1 1 1 1 1 1	IGC-4710-1, A-1 IGC-4710-2, IGC-4713A IGC-4703A-1, IGC-4721-1 IGC-4702A IGC-4723-1M, IGC-4724-1M, IGC-4725-1M IGC-4705, IGC-4711	
 BEARING, Ball, S. A. E. #202 Tach. Drive	X-294	1	IGC-4711	
 Clip, Contact Arm Spring	IG-676	1	All	
 COLLARS (A) Shaft (B) Shaft	IGB-199 IGS-19S	1 1	IGC-4705, IGC-4711 IGC-4703A, A-1, IGC-4721, -1, IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M	
 CONTACT, Dist. Cap Plunger	IG-514	1	All	
 COVERS (A) Terminal Slot (B) Dist. Cap (B) Dist. Cap (C) Tachometer Shaft Housing	IGC-117 IGC-1124 IGC-1124L IGS-38	1 1 1 1	All IGC-4725-1M IGC-4713A IGC-4711	
 CUP, Grease	X-382 X-382A	1 1	IGC-4711 IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M	
 GASKET, Dist. Cap Cover	IGB-230	3	IGC-4713A, IGC-4725-1M	
 GEARS (A) Tachometer Drive (B) Tachometer Follower	GE-47 GE-48	1 1	IGC-4711 IGC-4711	
 LOCKWASHERS (A) Advance Arm Mtg. 1/4 (A) Advance Arm Mtg. Skpf. 1/4 (B) Breaker Plate Mtg. Skpf. #10 (C) Condenser & Clamp Sc. #6 (D) Terminal Screw #10	12X-199 X-1711 X-1270 12X-194 X-196	1 1 2 2 1	IGC-4721-1 IGC-4703A-1 All All IGC-4702A, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A	
 OILERS (A) Elbow Dist. Base (B) Sleeve Dist. Base	X-1590 X-490A	1 1	IGC-4703A, A-1, IGC-4721, -1 IGC-4702A, IGC-4705, IGC-4710-1, -2, A-1, IGC-4713A	
 PLATES, Breaker	IGC-1148 IGC-1148B	1 1	IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A, IGC-4721, -1 IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M	
 PLUG, Rubber Dist. Cap Vent Hole	IGS-32	1	IGC-4702A, IGC-4703A, A-1, IGC-4710-1, -2, A-1, IGC-4721, -1, IGC-4723M, -1M, IGC-4724M, -1M	
 POINTER, Advance Arm	IGS-21	1	IGC-4702A	
 RIVETS (A) Collar, Shaft (A) Coupling, Shaft (A) Gear (B) Tubular, Cap Spring (B) Tubular, Cap Spring	SW-213 SW-213 GJ-236 X-1448 8X-2893	1 1 1 2 2	IGC-4703A, A-1, IGC-4705, IGC-4711, IGC-4721, -1, IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M IGC-4710-1, -2, A-1, IGC-4713A IGC-4702A, IGC-4711 IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A, IGC-4721, -1 IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M	
 SCREWS (B) Advance Arm Hex. 1/4-20x1/2 (B) Advance Arm Hex. 1/4-20x5/8 (D) Breaker Contact Lock, Fill. Hd. #8-32x3/16 (D) Breaker Contact Lock, Fill. Hd. #8-32x3/16 (A) Clamp Spring, Hex. Hd. #6-32x5/16 (D) Condenser Mtg. Fill. Hd. #6-32x5/32 (D) Condenser Mtg. Fill. Hd. #6-32x5/32 (C) Dist. Cap Cover, Ctsk. Hd. #8-32x3/4 (C) Dist. Cap Cover, Ctsk. Hd. #8-32x3/4 (D) Terminal, Fill. Hd. #10-32x1/4	8X-85 8X-86 8X-884 19X-884 IGC-175 8X-1546 19X-1546 8X-1340 X-2932 8X-872	1 1 1 1 1 1 1 3 3 1	IGC-4703A-1 IGC-4721-1 IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A, IGC-4721, -1 IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M All IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A, IGC-4721, -1 IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M IGC-4713A IGC-4725-1M IGC-4702A, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A	
 SHAFT, Drive, Tachometer	IGS-37	1	IGC-4711	
 SNAP RING, Cam Retaining	IG-680	1	All	
 SPACER, Cam	IGS-99	1	All	

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Con't.)


Name	Part No.	No. Used	Used On
SPRINGS			
(A) Anti-Rattle	IGT-69	1	IGC-4705, IGC-4710-2, IGC-4711
(B) Cap Clamp	IG-694	2	IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A, IGC-4721, -1
(B) Cap Clamp	IG-694A	2	IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M
(C) Contact, Dist. Cap	IG-515A	1	All
WASHERS			
(B) Advance Arm Mtg. Sc.	SW-634	1	IGC-4721-1
(D) Clamp Sc. (Plain) #6	8X-353	1	IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A, IGC-4721, -1
(D) Clamp Sc. (Plain) #6	19X-353	1	IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M
(D) Contact Lock Sc. (Plain) #8	8X-350	1	IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A, IGC-4721, -1
(D) Contact Lock Sc. (Plain) #8	19X-350	1	IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M
(C) Thrust, Advance Arm	IG-816	1	IGC-4705, IGC-4710-1, A-1, IGC-4711, IGC-4723-1M, IGC-4724-1M, IGC-4725-1M
(C) Thrust, Advance Arm	IG-816A	1	IGC, 4702A, IGC-4710-2, IGC-4713A
(F) Thrust, Drive Shaft, Lower	IG-90	1	All
(F) Thrust, Drive Shaft, Upper	IG-90	1	IGC-4711
(A) Thrust, Drive Shaft, Upper	IGS-104	1	IGC-4702A, IGC-4703A, A-1, IGC-4705, IGC-4710-1, -2, A-1, IGC-4713A, IGC-4721, -1, IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M, IGC-4711
(E) Thrust, Tachometer Shaft	IGS-39	1	IGC-4711
WEIGHTS			
Governor	IG-1322	2	IGC-4702A
Governor	IG-1456	2	IGC-4703A, A-1, IGC-4721, -1, IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M
Governor	IG-2456	2	IGC-4705, IGC-4710-1, -2, A-1, IGC-4711, IGC-4713A
WICKS			
(A) Felt, Cam Sleeve	IGH-28	1	All
(B) Felt, Oiler	IGS-117	1	IGC-4703A, A-1, IGC-4705, IGC-4713A, IGC-4721, -1
(B) Felt, Grease Cup	IGS-117A	1	IGC-4723M, -1M, IGC-4724M, -1M, IGC-4725-1M

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4800 SERIES DISTRIBUTOR PARTS LIST

IGC-4800 Series
(Issued 1-11-52)

Model No.	No. Cyl.	CUSTOMER
IGC-4801	6	Studebaker
IGC-4802	6	Studebaker
IGC-4805	6	Studebaker
IGC-4806	6	White Motor
IGC-4807A	6	Continental
IGC-4808A	6	Diamond T.
IGC-4810	6	Owens Yacht

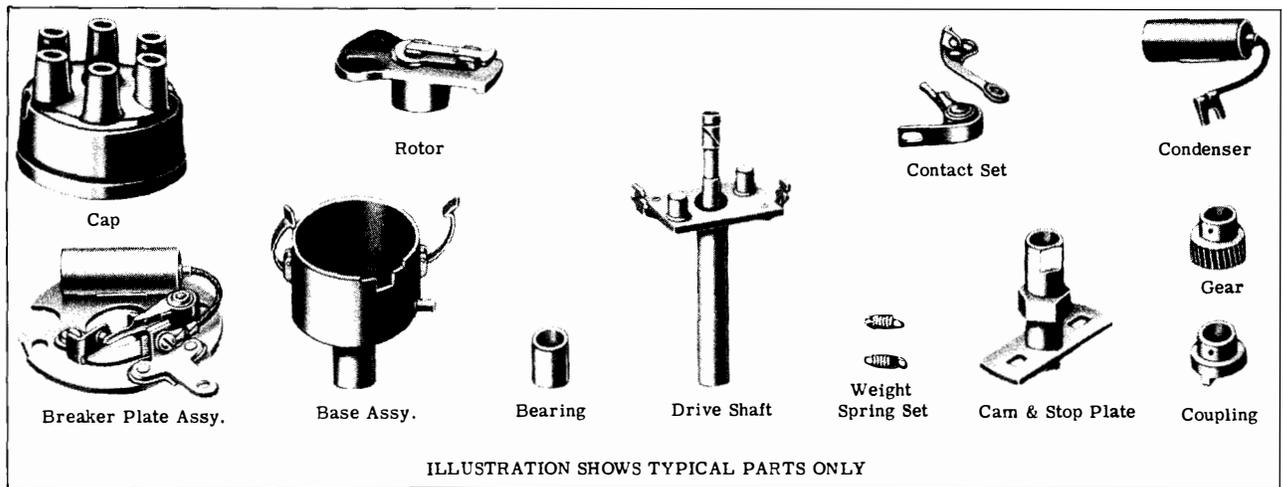

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-4801	IGC-1107S	IGS-1016	IGP-3028FS	IG-2671	IGC-2148D	IGS-2128A	IG-579A	IGS-1129L	IGB-337S	IGS-1100LE	----
IGC-4802	IGC-1107S	IGS-1016	IGP-3028FS	IG-2671	IGC-2148D	IGS-2128	IG-579A	IGS-1130L	IGB-338S	IGS-1100LA	----
IGC-4805	IGC-1107S	IGS-1016	IGP-3028FS	IG-2671	IGC-2148D	IGS-2128A	IG-579A	IGS-1159L	IGB-337S	IGS-1100LE	----
IGC-4806	IGC-1123B*	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2173	IG-579A	IGS-1172R	IGB-350S	IGS-1100RK	IGC-136
IGC-4807A	IGC-1123B*	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2160	IG-579A	IGS-1151RE	IGB-328GS	IGS-1100RE	GG-9A
IGC-4808A	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2144A	IG-579A†	IGS-1174R	IGE-29S	IGS-1100RX	GE-41†
IGC-4810	IGC-1123B*	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2194	IG-579A†	IGS-1195R	IG-884S	IGS-1100RAH	----

* IGC-1124 Dist. Cap Cover.

† See Miscellaneous Parts Section for other Drive Gears.

‡ See Miscellaneous Parts Section for other bearings.

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
 ARM, Advance	IG-2860A IGB-2296A	1 1	IGC-4807A IGC-4808A
 BEARING, Ball S.A.E. #202 Tach. Drive	X-294	1	IGC-4808A, IGC-4810
 CLIP, Contact Arm Spring	IG-676	1	All

File in
Equipment & Parts List Binder

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Continued)


	Name	Part No.	No. Used	Used On
	COLLAR, Shaft	IGB-199	1	IGC-4801, IGC-4802, IGC-4805, IGC-4810
	CONTACT, Dist. Cap Plunger	IG-514	1	All
 A	COVERS (A) Terminal Slot (B) Dist. Cap (C) Tachometer Shaft Housing	IGC-117	1	All
 B		IGC-1124	1	IGC-4806, IGC-4807A, IGC-4810
 C		IGS-38	1	IGC-4808A, IGC-4810
	CUP, Grease	X-382	1	IGC-4801, IGC-4802, IGC-4805, IGC-4806, IGC-4808A, IGC-4810
	GASKET, Dist. Cap Cover	IGB-230	3	IGC-4806, IGC-4807A, IGC-4810
 A	GEARS (A) Tachometer Drive (B) Tachometer Follower	GE-47	1	IGC-4808A, IGC-4810
 B		GE-48	1	IGC-4808A, IGC-4810
 B	LOCKWASHERS (A) Condenser & Clamp Screw #6 (B) Terminal Screw #10	X-194	2	All
 A		12X-196	1	IGC-4801, IGC-4802, IGC-4805, IGC-4806, IGC-4807A, IGC-4808A
	OILER, Dist. Base	X-490A	1	IGC-4807A
	PLATE, Breaker	IGC-1148	1	All
 A	RIVETS (A) Collar, Shaft (A) Coupling, Shaft (A) Gear (A) Gear (B) Tubular, Cap Spring	SW-213	1	IGC-4801, IGC-4802, IGC-4805, IGC-4810
 A		SW-213	1	IGC-4806
 A		SW-213	1	IGC-4807A, IGC-4808A, IGC-4810
 A		GJ-236	1	IGC-4808A
 B		X-1448	2	All
 C	SCREWS (A) Breaker Contact Lock, Fill. Hd. #8-32x3/16 (A) Breaker Plate Mtg. Fill. Hd. #10-32x5/16 (B) Clamp Spring, Rd. Hd. #6-32x1/4 (A) Condenser Mtg. Fill. Hd. #6-32x5/32 (C) Dist. Cap Cover Ctsk. Hd. #8-32x3/4 (A) Terminal, Fill. Hd. #10-32x1/4	8X-884	1	All
 B		8X-870	2	All
 A		8X-302	1	All
		8X-1546	1	All
		8X-1340	3	IGC-4806, IGC-4807A, IGC-4810
		8X-872	1	IGC-4801, IGC-4802, IGC-4805, IGC-4806, IGC-4807A, IGC-4808A
	SHAFT, Drive, Tachometer	IGS-148	1	IGC-4808A, IGC-4810
	SNAP RING, Cam Retaining	IG-680	1	All
	SPACER, Cam	IGS-99	1	All
 B	SPRINGS (A) Anti-Rattle (A) Anti-Rattle (B) Cap Clamp (C) Contact, Dist. Cap	IGT-69	1	IGC-4801, IGC-4802, IGC-4805
 A		IGT-70	1	IGC-4806, IGC-4807A, IGC-4810
 C		IG-694	2	All
		IG-515A	1	All
 C	WASHERS (A) Breaker Plate Mtg. Skpf. #10 (B) Contact Lock Sc. (Plain) #8 (C) Thrust, Advance Arm (D) Thrust, Drive Shaft, Lower (D) Thrust, Drive Shaft, Upper (E) Thrust, Drive Shaft, Upper (F) Thrust, Tachometer Shaft	X-1270	2	All
 B		8X-350	1	All
 C		IG-816	1	IGC-4807A, IGC-4808A, IGC-4810
 D		IG-90	1	All
 E		IG-90	1	IGC-4808A, IGC-4810
 E		IGS-104	1	IGC-4801, IGC-4802, IGC-4805, IGC-4806, IGC-4807A
 F		IGS-39	1	IGC-4808A, IGC-4810
 Governor	WEIGHTS Governor Governor	IGC-2168L	2	IGC-4801, IGC-4802, IGC-4805
 Governor		IGC-2168R	2	IGC-4806, IGC-4807A, IGC-4808A, IGC-4810
 A	WICKS (A) Felt, Cam Sleeve (B) Felt, Grease Cup	IGH-28	1	All
 B		IGS-117A	1	IGC-4801, IGC-4802, IGC-4805, IGC-4806

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-4900 SERIES DISTRIBUTOR PARTS LISTS

IGC-4900 Series
(Issued 1-10-52)

Model No.	No. Cyl.	CUSTOMER	Model No.	No. Cyl.	CUSTOMER
IGC-4904	6	Harnischfeger, Available Tr.	IGC-4909A-1	6	Brockway
IGC-4905	6	Continental	IGC-4913	6	Ward LaFrance
IGC-4905A	6	Continental	IGC-4914	6	Aktiebolaget Volvo (Export)
IGC-4907	6	Continental	IGC-4914A	6	Aktiebolaget Volvo (Export)
IGC-4908	6	Brockway	IGC-4914B	6	Aktiebolaget Volvo (Export)
IGC-4908A	6	Brockway			

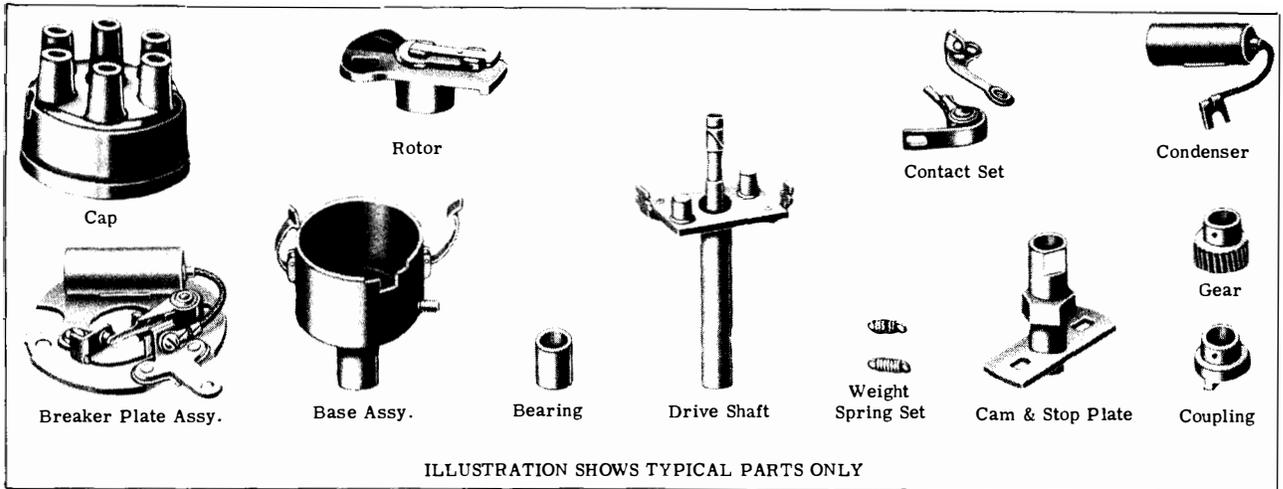

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-4904	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053RD	IG-775S	IGS-1100RD	IG-644A
IGC-4905	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053LC	IGC-42MS	IGS-1100LO	IG-644A
IGC-4905A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1053LC	IG-636US	IGS-1100LT	IG-644A
IGC-4907	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-1062B	IG-579A	IGS-1171L	IGB-337S	IGS-1100LC	IG-644
IGC-4908	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2149	IG-579A	IGS-1150L	IGC-42JS	IGS-1100LP	IGC-1180
IGC-4908A	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2149	IG-579A	IGS-1150L	IG-817AS	IGS-1100LN	IGC-1180
IGC-4909A-1	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2062B	IG-579A	IGS-1171LB	IGB-344S	IGS-1100LS	IG-644
IGC-4913	IGC-1107S	IGS-1016B	IGP-3028FS	IGW-3139	IGC-2148C	IGS-2142	IG-579A†	IGS-1155L	IGB-337S	IGS-1100LC	IG-644*
IGC-4914	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2182	IG-579A	IGS-1180RB	IGE-30KS	IGS-1100RP	----
IGC-4914A	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2182	IG-579A	IGS-1180RB	IGB-327ES	IGS-1100RAB	----
IGC-4914B	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2182	IG-579A	IGS-1180RB	IGC-200S	IGS-1100RV	----

* See Miscellaneous Parts Section for other Drive Gears.
† See Miscellaneous Parts Section for other Bearings.




MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used On
 ARM, Advance	IG-2860A	1	IGC-4905, A
	IGC-2024AT-15	1	IGC-4913
	IGC-2024N-2	1	IGC-4904
	IGC-2049A-1	1	IGC-4907
	IGC-2049A-2	1	IGC-4909A-1
	IGS-1020	1	IGC-4908, A

File in
Equipment & Parts List Binder

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Continued)

Name	Part No.	No. Used	Used On
 BEARING, Ball S. A. E. #202 Tach. Drive	X-294	1	IGC-4913
 CLIP, Contact Arm Spring	IG-676	1	All
 CONTACT, Dist. Cap Plunger	IG-514	1	All
 COVERS (A) Terminal Slot (B) Tachometer Shaft Housing	IGC-117 IGS-38	1 1	All IGC-4913
 CUP, Grease	X-382	1	IGC-4913
 GEARS (A) Tachometer Drive (B) Tachometer Follower	GE-47 GE-48	1 1	IGC-4913 IGC-4913
 LOCKWASHERS (A) Condenser & Clamp Screw #6 (B) Terminal Screw #10	X-194 12X-196	2 1	All All
 OILER, Dist. Base	X-490A	1	IGC-4904, IGC-4905, A, IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4914, A, B
 PLATE, Breaker	IGC-1148	1	All
 PLUG, Rubber, Dist. Cap Vent. Hole	IGS-32	1	All
 POINTER, Advance Arm	IGS-21	1	IGC-4908, A
 RIVETS (A) Coupling, Shaft (A) Gear (B) Tubular, Cap Spring	SW-213 SW-213 X-1448	1 1 2	IGC-4904, IGC-4905, A, IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4913 All
 SCREWS (A) Breaker Contact Lock, Fill Hd. #8-32x3/16 (A) Breaker Plate Mtg., Fill. Hd. #10-32x5/16 (B) Clamp, Spring, Hex. Hd. #6-32x5/16 (C) Clamp, Spring, Rd. Hd. #6-32x1/4 (A) Condenser Mtg., Fill. Hd. #6-32x5/32 (A) Terminal, Fill. Hd. #10-32x1/4	8X-884 8X-870 IGC-175 8X-302 8X-1546 8X-872	1 2 1 1 1 1	All All IGC-4904, IGC-4905, A, IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4913 IGC-4914, A, B All All
 SHAFT, Drive Tachometer	IGS-148	1	IGC-4913
 SNAP RING, Cam Retaining	IG-680	1	All
 SPACER, Cam	IGS-99	1	All
 SPRINGS (A) Anti-Rattle (A) Anti-Rattle (B) Cap Clamp (C) Contact, Dist. Cap	IGT-69 IGT-70 IG-694 IG-515A	1 1 2 1	IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4913 IGC-4904, IGC-4914, A, B All All
 WASHERS (A) Breaker Plate Mtg. Skpf. #10 (B) Clamp Screw (Plain) #6 (B) Contact Lock Sc. (Plain) #8 (C) Thrust, Advance Arm (C) Thrust, Advance Arm (D) Thrust, Drive Shaft Lower (D) Thrust, Drive Shaft Upper (E) Thrust, Drive Shaft Upper (F) Thrust, Tachometer Shaft	X-1270 8X-353 8X-350 IG-816 IG-816A IG-90 IG-90 IGS-104 IGS-39	2 1 1 1 1 1 1 1	All IGC-4904, IGC-4905, A, IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4913 All IGC-4905, A, IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4913 IGC-4904 All IGC-4913 IGC-4904, IGC-4905, A, IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4914, A, B IGC-4913
 WEIGHTS Governor Governor	IGC-2168L IGC-2168R	2 2	IGC-4905, A, IGC-4907, IGC-4908, A, IGC-4909A-1, IGC-4913 IGC-4904, IGC-4914, A, B
 WICKS (A) Felt, Cam Sleeve (B) Felt, Oiler	IGH-28 IGS-117	1 1	All IGC-4907, IGC-4908, A, IGC-4914, A, B

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-5001, A, B, C, D DISTRIBUTOR PARTS LIST

IGC-5001, A, B, C, D
(Issued 11-9-55)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner, Drive Shaft, Upper	IGS-99	1	Spacer, Cam
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	IGS-117	1	Wick, Felt
IG-90	1	Washer, Thrust, Drive Shaft, Lower	IGS-1016B	1	ROTOR
IG-94	7	Terminal, H. T. Wire	IGS-1020	1	Arm, Advance
IG-680	1	Snap Ring, Cam Retaining	**	1	Cam & Stop Plate, 6 Cyl. L. H.
IG-816A	1	Washer, Thrust, Advance Arm	IGS-1150L	1	SHAFT, DRIVE
**	1	SPRING SET, GOV. WEIGHT	IGS-2062B	1	Base Assy., Distributor
IGC-117	1	Cover, Terminal Slot	IG-579A	2	Bearing, Abs. Bronze
IGC-1107S	1	CAP ASSY., DISTRIBUTOR	IG-694	2	Spring, Clamp, Cap
IG-514	1	Contact, Plunger	X-1448	2	Pin, Hinge, Cap Spring
IG-515A	1	Spring, Contact	IGT-69	1	Spring, Anti-Rattle
IGC-1180	1	Coupling, Drive, Distributor	SW-213	1	Rivet, Coupling
IGC-2148K	1	Plate Assy., Breaker	X-490A	1	Oiler
IAD-3128S	1	CONTACT SET, BREAKER	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IG-676	1	Clip, Spring, Contact Arm	8X-872	1	Screw, Terminal, Fill. Hd. #10-32x1/4
IG-3927C	1	CONDENSER	X-1270	3	Washer, Breaker Plate Mtg. & Terminal Sc., Skpf. #10
IGC-1148	1	Plate, Breaker	** See table following parts list for part number applying to assembly wanted.		
12X-194	2	Lockwasher, Condenser & Clamp Screw, #6	Assembly No.	Spring Set, Gov. Weight	Cam & Stop Plate
8X-302	1	Screw, Spring Clamp, Rd. Hd. #6-32x1/4	IGC-5001	IGC-42JS	IGS-1100LP
8X-350	1	Washer, Plain, Contact Lock Screw, #8	IGC-5001A	IG-817AS	IGS-1100LN
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16	IGC-5001B	IG-817BS	IGS-1100LR
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	IGC-5001C	IGB-327MS	IGS-1100LZ
IGC-2168L	2	Weight, Governor	IGC-5001D	IGB-327NS	IGS-1100LN
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-21	1	Pointer, Advance Arm			
IGS-32	1	Plug, Vent. Hole, Rubber			

UNIT	APPLICATION
IGC-5001	Brockway (Truck), Continental
IGC-5001, A, B, C, D	Brockway (Truck)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking su -parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-5501A DISTRIBUTOR PARTS LIST

IGC-5501A

Part No.	No. Used	Name of Part 1 2 3 4 5	Part No.	No. Used	Name of Part 1 2 3 4 5
IG-90	1	Washer, Thrust, Drive Shaft, Lower	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IG-94	7	Terminal, H.T. Wire	8X-872	1	Screw, Terminal, Fill. Hd. #10-32x1/4
IG-680	1	Snap Ring, Cam Retaining	X-1270	3	Washer, Breaker Plate Mtg. & Terminal Sc., Skpf. #10 1 2 3 4 5
IG-775S	1	Spring Set, Gov. Weight			
IGC-117	1	Cover, Terminal Slot			
IGC-1107S	1	CAP ASSY., DIST.			
IG-514	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGC-2148D	1	Plate Assy., Breaker			
IG-676	1	Clip, Spring, Contact Arm			
IG-2671	1	CONDENSER			
IGC-1148	1	Plate, Breaker			
IGP-3028FS	1	CONTACT SET, BREAKER			
8X-302	1	Screw, Spring Clamp, Rd. Hd. #6-32x1/4			
8X-350	1	Washer, Plain, Contact Lock Screw, #8			
8X-884	1	Screw, Lock, Breaker Contact, Fill. Hd. #8-32x3/16			
X-1012	2	Lockwasher, Condenser & Clamp Screw, #6			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IGC-2168R	2	Weight, Governor			
IGH-28	1	Wick, Felt, Cam Sleeve			
IGS-32	1	Plug, Rubber, Vent. Hole			
IGS-99	1	Spacer, Cam			
IGS-104	1	Washer, Thrust, Drive Shaft, Upper			
IGS-1016B	1	ROTOR			
IGS-1100RH	1	Cam & Stop Plate, 6Cyl. R.H.			
IGS-1178R	1	Shaft, Drive			
IGS-2062B	1	Base Assy., Dist.			
IG-579A	2	Bearing, Absorbent Bronze			
IG-694	2	Spring, Clamp, Cap			
X-490A	1	Oiler, Sleeve, Press in, 1/4			
X-1448	2	Pin, Hinge, Cap Spring			
IGT-70	1	Spring, Anti-Rattle 1 2 3 4 5			

UNIT	APPLICATION
IGC-5501A	Nordberg Mfg.

Printed in U. S. A.

(Issued 4-19-48)

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."




ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGC-6000 SERIES DISTRIBUTOR PARTS LIST

IGC-6000 Series
(Issued 2-28-55)

Model No.	No. Cyl.	CUSTOMER
IGC-6001-1A	6	Ward LaFrance
IGC-6001-1F	6	International Harvester
IGC-6001-1L	6	Available
IGC-6001-1P	6	Hercules
IGC-6001-2D	6	Lincoln Electric
IGC-6001-2F	6	Harnischfeger, Sterling Truck
IGC-6001-2L	6	Maxim Motor
IGC-6001	6	Bay City Shovel, Sterling Truck
IGC-6001A	6	Buda
IGC-6001B	6	Buda
IGC-6001C	6	Bay City Shovel, Hercules, U. S. Motors
IGC-6001E	6	Hercules
IGC-6001G	6	Bay City Shovel, Crown Body, Hercules
IGC-6001H	6	Kermath
IGC-6001M-2A	6	Gray Marine
IGC-6001MA	6	Gray Marine
IGC-6001N	6	Duplex Truck
IGC-6001S	6	Harnischfeger
IGC-6001W	6	Climax
IGC-6002-1A	6	Checker Cab
IGC-6002-1AA	6	Continental
IGC-6002-1AB	6	Continental
IGC-6002-1AC	6	Checker Cab
IGC-6002-1AD	6	Checker Cab
IGC-6002-1AE	6	Brockway
IGC-6002-1AF	6	Brockway
IGC-6002-1AG	6	Brockway
IGC-6002-1AH	6	Brockway
IGC-6002-1E	6	Brockway, Continental
IGC-6002-1P	6	Continental
IGC-6002-1Q	6	Ward LaFrance
IGC-6002-1R	6	Brockway
IGC-6002-1S	6	Brockway
IGC-6002-1T	6	Four Wheel Drive
IGC-6002-1U	6	Continental, Onan
IGC-6002-1V	6	Continental, Onan
IGC-6002-2B	6	Universal
IGC-6003B	4	Climax
IGC-6003C	4	Hercules, Keller, Playboy, U. S. Motors
IGC-6004-1	4	Continental
IGC-6005-2A	6	Continental
IGC-6005-2B	6	Continental
IGC-6005B	6	Duplex Truck
IGC-6006-1	6	Continental
IGC-6010-1B	6	Brockway
IGC-6010-1C	6	Brockway
IGC-6010-1D	6	Brockway
IGC-6010-1E	6	Brockway

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

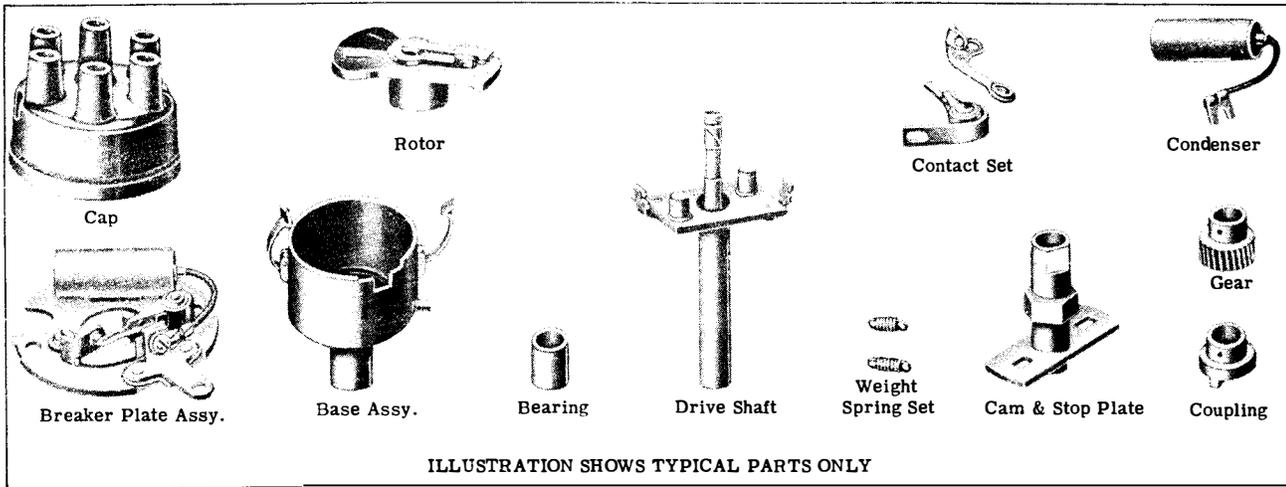

Assembly No.	Cap	Rotor	Contact Set	Condenser	Breaker Plate Assy.	Base Assy.	Bearings (2) Used	Drive Shaft	Weight Spring Set	Cam & Stop Plate	Gear or Coupling
IGC-6001-1A	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053RE	IGB-339AS	IGS-1100RH	IG-644A
IGC-6001-1F	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053RE	IGC-201S	IGS-1100RAE	IG-644A
IGC-6001-1L	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053RE	IGC-207S	IGS-1100RD	IG-644A
IGC-6001-1P	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053RE	IGB-208S	IGS-1100RO	IG-644A
IGC-6001-2D	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-317DS	IGS-1100RV	GE-87
IGC-6001-2F	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-207S	IGS-1100RD	IA-135
IGC-6001-2L	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-204S	IGS-1100RJ	IA-135
IGC-6001	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-207S	IGS-1100RD	---
IGC-6001A	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-208S	IGS-1100RV	---
IGC-6001B	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-204S	IGS-1100RP	---
IGC-6001C	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-208S	IGS-1100RAE	---
IGC-6001E	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-208S	IGS-1100RJ	---
IGC-6001G	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-201S	IGS-1100RAE	---
IGC-6001H	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-206S	IGS-1100RV	---
IGC-6001M-2A	IGC-1107S	IGS-1016B	IGP-3028VS	IG-2671	IGC-2148DM	IGS-2062BM	IG-579A	IGS-1180RM	IGC-206S	IGS-1100R-3	GE-88
IGC-6001MA	IGC-1107S	IGS-1016B	IGP-3028VS	IG-2671	IGC-2148DM	IGS-2062BM	IG-579A	IGS-1180RM	IGC-206S	IGS-1100R-3	---
IGC-6001N	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-327HS	IGS-1100RO	---
IGC-6001S	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-327DS	IGS-1100RO	---
IGC-6001W	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-214S	IGS-1100RX	---
IGC-6002-1A	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-293S	IGS-1100LQ	IG-644A
IGC-6002-1AA	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-317HS	IGS-1100LY	IG-644A
IGC-6002-1AB	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LC	IG-636US	IGS-1100LT	IG-644A
IGC-6002-1AC	IGC-1107S	IGS-1016B	IGP-3028FS	IG-3927C	IGC-2148A	IGS-2062B	IG-579A	IGS-1053LE	IGB-293S	IGS-1100LQ	IG-644A
IGC-6002-1AD	IGC-1107S	IGS-1016B	IAD-3128S	IG-3927C	IGC-2148K	IGS-2062C	IG-579A	IGS-1053LE	IGB-222S	IGS-1100LQ	IG-644A
IGC-6002-1AE	IGC-1107S	IGS-1016B	IAD-3128S	IG-3927C	IGC-2148K	IGS-2062B	IG-579A	IGS-1053LE	IGE-24S	IGS-1100LQ	IG-644A
IGC-6002-1AF	IGC-1107S	IGS-1016B	IAD-3128S	IG-3927C	IGC-2148K	IGS-2062B	IG-579A	IGS-1053LE	IGC-202S	IGS-1100LS	IG-644A
IGC-6002-1AG	IGC-1107S	IGS-1016B	IAD-3128S	IG-3927C	IGC-2148K	IGS-2062B	IG-579A	IGS-1053LE	IGC-201S	IGS-1100LC	IG-644A
IGC-6002-1AH	IGC-1107S	IGS-1016B	IAD-3128S	IG-3927C	IGC-2148K	IGS-2062B	IG-579A	IGS-1053LE	IGB-284FS	IGS-1100LD	IG-644A
IGC-6002-1E	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-24S	IGS-1100LQ	IG-644A
IGC-6002-1P	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGC-200S	IGS-1100LU	IG-644A
IGC-6002-1Q	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-317GS	IGS-1100LD	IG-644A
IGC-6002-1R	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGC-201S	IGS-1100LC	IG-644A
IGC-6002-1S	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGC-202S	IGS-1100LS	IG-644A
IGC-6002-1T	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-339AS	IGS-1100LN	IG-644A
IGC-6002-1U	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-327BS	IGS-1100LV	IG-644A
IGC-6002-1V	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-327FS	IGS-1100LA	IG-644A
IGC-6002-2B	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180L	IGE-24S	IGS-1100LQ	GE-89
IGC-6003B	IG-1324D	IG-1657R	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGC-204S	IGC-1132RD	---
IGC-6003C	IG-1324D	IG-1657R	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGE-30KS	IGC-1132RK	---
IGC-6004-1	IG-1324D	IG-1657R	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IG-727S	IGC-1132LC	IG-644A
IGC-6005-2A	IGC-1123B*	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-317HS	IGS-1100RE	IA-135
IGC-6005-2B	IGC-1123B*	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-327FS	IGS-1100RAH	IA-135
IGC-6005B	IGC-1123B*	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1180R	IGB-208S	IGS-1100RAP	---
IGC-6006-1	IGC-1123L†	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2062B	IG-579A	IGS-1053LE	IGB-208S	IGS-1100LAA	IG-644A
IGC-6010-1B	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2142	IG-579A	IGS-1145LA	IGC-202S	IGS-1100LS	IG-644A
IGC-6010-1C	IGC-1107S	IGS-1016B	IGP-3028FS	IG-2671	IGC-2148D	IGS-2142	IG-579A	IGS-1145LA	IGB-293SS	IGS-1100LZ	IG-644A
IGC-6010-1D	IGC-1107S	IGS-1016B	IAD-3128S	IG-3927C	IGC-2148K	IGS-2142	IG-579A	IGS-1145LA	IGB-293SS	IGS-1100LZ	IG-644A
IGC-6010-1E	IGC-1107S	IGS-1016B	IAD-3128S	IG-3927C	IGC-2148K	IGS-2142	IG-579A	IGS-1145LA	IG-727AS	IGS-1100LD	IG-644A

* IGC-1124 Distributor Cap Cover.
 † IGC-1124L Distributor Cap Cover.

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS

Name	Part No.	No. Used	Used on
 BEARING, Ball, S. A. E. #202, Tach. Drive	X-294	1	IGC-6010-1B, 1C, 1D, 1E
 CLIP, Contact Arm Spring	IG-676	1	All
 CONTACT, Dist. Cap Plunger	IG-514	1	All
COVERS			
 (A) Terminal Slot	IGC-117	1	All
 (B) Dist. Cap	IGC-1124	1	IGC-6005-2A, 2B, B
 (B) Dist. Cap	IGC-1124L	1	IGC-6006-1
 (C) Tachometer Shaft Housing	IGS-38	1	IGC-6010-1B, 1C, 1D, 1E
 CUP, Grease	X-382	1	IGC-6010-1B, 1C, 1D, 1E
 GASKET, Dist. Cap Cover	IGB-230	3	IGC-6005-2A, 2B, B, IGC-6006-1
GEARS			
 (A) Tachometer Drive	GE-47	1	IGC-6010-1B, 1C, 1D, 1E
 (B) Tachometer Follower	GE-48	1	IGC-6010-1B-1C-1D-1E
LOCKWASHERS			
 Condenser & Clamp Screw, #6	X-194	2	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, IGC-6002-1E, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B IGC-6003C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6010-1B, 1C IGC-6001M-2A, MA, IGC-6002-1AD, 1AE, 1AF, 1AG, 1AH, 1P IGC-6003B, IGC-6006-1, IGC-6010-1D, 1E
Condenser & Clamp Screw, #6	12X-194	2	
 OILER, Dist. Base	X-490A	1	IGC-6001-1A, 1F, 1L, 1P, 2D, 2F, 2L, IGC 6001, A, B, C, E, G, H, M-2A, MA, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, IGC-6002-1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC 6004-1, IGC-6005-2A, 2B, B, IGC-6006-1
 PLATE, Breaker	IGC-1148	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, IGC-6002-1AD, 1AE, 1AF, 1AG, 1AH, IGC-6002-1E, 1P, 1Q, 1R, 1S, 1T, IGC-6002-1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC 6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E IGC-6001M-2A, MA
IGC-1148B	1		
 PLUG, Rubber, Dist. Cap Vent. Hole	IGS-32	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6001M-2A, MA, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6010-1D, 1F
RIVETS			
 (A) Coupling, Shaft	SW-213	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, IGC-6002-1R, 1S, 1T, 1U, 1V, IGC-6004-1, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E
 (A) Gear	SW-213	1	IGC-6001-2F, 2L, IGC-6001M-2A, IGC-6002-2B, IGC-6005-2A, IGC-6005-2B, IGC-6010-1B, 1C, 1D, 1E
 (A) Gear	GJ-236	1	IGC-6001-2D
 (B) Tubular, Cap Spring	X-1448	2	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, IGC-6002-1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E IGC-6001M-2A, MA
(B) Tubular, Cap Spring	8X-2893	2	
SCREWS			
 (A) Breaker Contact Lock, Fill. Hd. #8-32x3/16	8X-884	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, IGC-6002-1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E
(A) Breaker Contact Lock, Fill. Hd. #8-32x3/16	19X-884	1	IGC-6001M-2A, MA
(A) Breaker Plate Mtg., Fill. Hd. #10-32x3/16	8X-870	2	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1 IGC-6010-1B, 1C, 1D, 1E
(A) Breaker Plate Mtg., Fill Hd. #10-32x5/16	19X-870	2	IGC-6001M-2A, MA
(B) Spring Clamp, Rd. Hd. #6-32x1/4	8X-302	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

MISCELLANEOUS PARTS (Continued)

Name	Part No.	No. Used	Used on
SCREWS (Continued)			
(B) Spring Clamp, Rd. Hd. #6-32x1/4	19X-302	1	IGC-6001M-2A, MA
(A) Condenser Mtg., Fill. Hd. #6-32x5/32	8X-1546	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B-1C-1D-1E
(A) Condenser Mtg., Fill. Hd. #6-32x5/32	19X-1546	1	IGC-6001M-2A, MA
(C) Dist. Cap Cover, Ctsk. Hd. #8-32x3/4	8X-1340	3	IGC-6005-2A, 2B, IGC-6006-1
(A) Terminal, Fill. Hd. #10-32x1/4	8X-872	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E
(A) Terminal, Fill. Hd. #10-32x1/4	19X-872	1	IGC-6001M-2A, MA
 SHAFT, Drive, Tachometer	IGS-148	1	IGC-6010-1B, 1C, 1D, 1E
 SNAP RING, Cam Retaining	IG-680	1	All
 SPACER, Cam	IGS-99	1	All
SPRINGS			
(A) Anti-Rattle	IGT-69	1	IGC-6002-1A, 1AA, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6004-1, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E
(A) Anti-Rattle	IGT-70	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6001M-2A, MA, IGC-6003B, C, IGC-6005-2A, IGC-6005-2B, B
(B) Cap Clamp	IG-694	2	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, IGC-6002-1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E
(B) Cap Clamp	IG-694A	2	IGC-6001M-2A, MA
(C) Contact, Dist. Cap	IG-515A	1	All
WASHERS			
(A) Breaker Plate Mtg., Skpf. #10	X-1270	2	All
(B) Contact Lock Sc., (Plain) #8	8X-350	1	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6003B, C, IGC-6004-1, IGC-6005-2A, 2B, B, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E
(B) Contact Lock Sc. (Plain) #8	19X-350	1	IGC-6001M-2A, MA
(A) Terminal Sc. Skpf. #10	X-1270	1	All
(C) Thrust, Drive Shaft, Lower	IG-90	1	All
(D) Thrust, Drive Shaft, Upper (Inner)	IAO-10	1	All
(D) Thrust, Drive Shaft, Upper (Outer)	IAO-11	1	All
(E) Thrust, Tachometer Shaft	IGS-39	1	IGC-6010-1B, 1C, 1D, 1E
WEIGHTS			
 Governor	IGC-2168L	2	IGC-6002-1A, 1AA, 1AB, 1AC, 1AD, 1AE, 1AF, 1AG, 1AH, 1E, 1P, 1Q, 1R, 1S, 1T, 1U, 1V, IGC-6002-2B, IGC-6004-1, IGC-6006-1, IGC-6010-1B, 1C, 1D, 1E
Governor	IGC-2168R	2	IGC-6001-1A, 1F, 1L, 1P, IGC-6001-2D, 2F, 2L, IGC-6001, A, B, C, E, G, H, N, S, W, IGC-6001M-2A, MA, IGC-6003B, C, IGC-6005-2A, 2B, B
WICKS			
(A) Felt, Cam Sleeve	IGH-28	1	All
(B) Felt, Dist. Oiler	IGS-117	1	All

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4003, A to H-1 DISTRIBUTOR PARTS LIST

IGE-4003,
A to H-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	Washer, Thrust, Drive Shaft, Lower	8X-321	2	Screw, Sub Plate Mtg., Rd. Hd., #10-32x5/16
IG-94	14	Terminal, H.T. Wire	8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd., #6-32x5/16
IG-495	1	Wick, Felt, Cam Sleeve	12X-537	2	Lockwasher, Sub Plate Mtg., #10
IG-644	1	Coupling, Drive, Dist.	12X-1012	2	Lockwasher, Condenser Mtg., #6
IG-816	1	Washer, Thrust, Advance Arm	8X-1546	3	Screw, Pri. Lead & Condenser Mtg., Fil. Hd., #6-32x5/32
IG-816A	1	Washer, Thrust, Advance Arm	*	1	Shaft & Gov. Assy.
*	1	Arm, Advance	*	1	Spring Set, Gov. Weight
IGE-36	1	Spring, Anti-Rattle, Gov.	IG-2456	2	Weight, Governor
IGE-1003L	1	CAP ASSY., DIST.	IGE-1020L	1	Shaft, Drive
IG-514	1	Contact, Plunger	IGE-2051	1	Base Assy., Dist.
IG-515A	1	Spring, Contact	IG-326	2	Pin, Hinge, Cap Spring
IGE-1016	1	ROTOR ASSY.	IG-579A	2	Bearing, Abs. Bronze
IA-218	1	Contact, Plunger	IG-694	2	Spring, Clamp, Cap
IG-515A	1	Spring, Contact	X-480	1	Oiler, Elbow, Press In, 1/4
*	1	Cam, & Stop Plate, 6 Cyl., L.H.	*	1	Spacer, Cam
IGE-2004	1	Plate Assy., Breaker	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
GK-151	2	Washer, Plain, Sub Plate Mtg., #10	SW-213	1	Rivet, Coupling, Drive Shaft
IA-131	2	Clip, Spring, Contact Arm	8X-119	2	Screw, Breaker Plate, Fil. Hd. #10-32x1/2
IB-23	2	Nut, Lock, Contact Screw	X-196	4	Washer, Lock, #10
IG-2671	2	CONDENSER	8X-872	2	Screw, Terminal, Fil. Hd. #10-32x1/4
IGE-14	1	Lead Assy., Primary			1 2 3 4 5
IGB-132	2	Terminal			
IGE-15	1	Washer, Plain, Sub Plate Mtg., #6			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub, Breaker			
IGP-3028BS	1	CONTACT SET, BREAKER			
12X-194	4	Lockwasher, Condenser & Pri. Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd., #6-32x1/4			

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Cam & Stop Plate	Shaft & Gov. Assy.	Spring Set Gov. Weight	Arm Advance	Cam Spacer
IGE-4003	IGE-1190L	IGE-2020L	IG-776S	IGC-2052-3	None
IGE-4003A	IGE-1190L	IGE-2020LA	IG-654S	IGC-2052-3	None
IGE-4003B	IGE-1143L	IGE-2020LB	IG-829S	IGC-2052-3	None
IGE-4003C	IGE-1190LB	IGE-2020LB-2	IG-829S	IGC-2052-3	None
IGE-4003D	IGE-1190LC	IGE-2020LD	IGE-30S	IGC-2052-3	None
IGE-4003E	IGE-1143LA	IGE-2020LE	IGB-210BS	IGC-2052-3	None
IGE-4003F	IGE-1190LE	IGE-2020LF	IGB-252S	IGC-2052-3	None
IGE-4003G	IGE-1067LC	IGE-2020LB-1	IG-829S	IGC-2052-3	IGS-99
IGE-4003H	IGE-1067LC	IGE-2020LB-1	IG-829S	IGC-2052-2	IGS-99
IGE-4003H-1	IGE-1067LC	IGE-2020LB-1	IG-829S	IGC-2068C-1	IGS-99

UNIT	APPLICATION
IGE-4003	Brockway
IGE-4003A,B,C,D	Continental
IGE-4003E	Brockway
IGE-4003F	Brockway, Continental
IGE-4003G,H-1	Brockway
IGE-4003H	Brockway, Continental

Printed in U. S. A.

(Issued 10-3-47)

File in
Equipment & Parts List Binder

NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed.



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4007 DISTRIBUTOR PARTS LIST
-A-B

IGE-4007
-A-B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	2	Thrust Washer	X-194	4	#6 Lock Washer
IG-94	14	H.T. Wire Terminal	8X-302	2	#6-32x1/4 Rd. Hd. Screw
IG-495	1	Cam Sleeve Felt Wick	8X-321	2	#10-32x5/16 Rd. Hd. Screw
IG-687	1	Spring Washer	8X-323	1	#6-32x5/16 Rd. Hd. Screw
IG-688	2	Advance Control Washer	X-537	2	#10 Lock Washer
IG-750	1	Advance Control Screw - 1/4-20	8X-873	3	#6-32x3/16 Fill. Hd. Sc.
			X-1012	2	#6 Lock Washer
IG-816	1	Thrust Washer	*	1	Drive Shaft & Gov. Assy.
IG-816A	1	Thrust Washer	*	2	Weight Spring
*	1	Governor Control Spring	*	2	Weight Assy.
IG-902	1	Advance Control Arm	IGE-1027R	1	Drive Shaft Assy.
IGE-1003	1	Dist. Cap Assy.	8X-119	2	#10-32x1/2 Fill. Hd. Screw
IA-213	1	Contact Spring	8X-163	1	1/4-20 Hex. Nut
IG-514	1	Contact Spring Plunger	X-196	4	#10 Lock Washer
IGE-1016	1	Rotor Assembly	8X-794	1	#10-32 Square Nut
IA-213	1	Contact Spring	8X-871	1	#10-32x1 3/8 Fill. Hd. Sc.
IA-218	1	Contact Spring Plunger	8X-872	2	#10-32x1/4 Fill. Hd. Screw
*	1	Cam & Stop Plate - 6 cyl. R.H.			1 2 3 4 5
IGE-2001	1	Dist. Base Assy.			(Issued 12-12-35)
IG-326	2	Hinge Pin			
IG-511	1	Name Plate			
IG-579	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-480	1	1/4 Oiler - Press in Elbow			
X-1042	2	#13x3/16 Escutcheon Pin			
IGE-2004	1	Breaker Plate Assy.			
GK-151	2	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-2671	2	Condenser Assy.			
IGE-14	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGE-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IB-24	1	Breaker Screw Point			
IGE-1012	1	Breaker Sub-Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IB-24	1	Breaker Screw Point			
IGP-3028	2	Breaker Arm Assy.			
IGP-30	2	Breaker Arm Spring			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Weight Assy.	Weight Spring	Cam Assembly	Control Spring
IGE-4007	IGE-2027R	IG-1322	IA-77	IGE-119ORD	None
IGE-4007A	IGE-2027RB	IG-1322	IGB-178	IGE-119ORD	IG-869
IGE-4007B	IGE-2027RD	IG-1456	IGB-208	IGE-119ORG	IGE-35


* See table following parts list for part number applying to assembly wanted.

Printed in U.S.A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGE-4007, A, B DISTRIBUTOR ILLUSTRATION

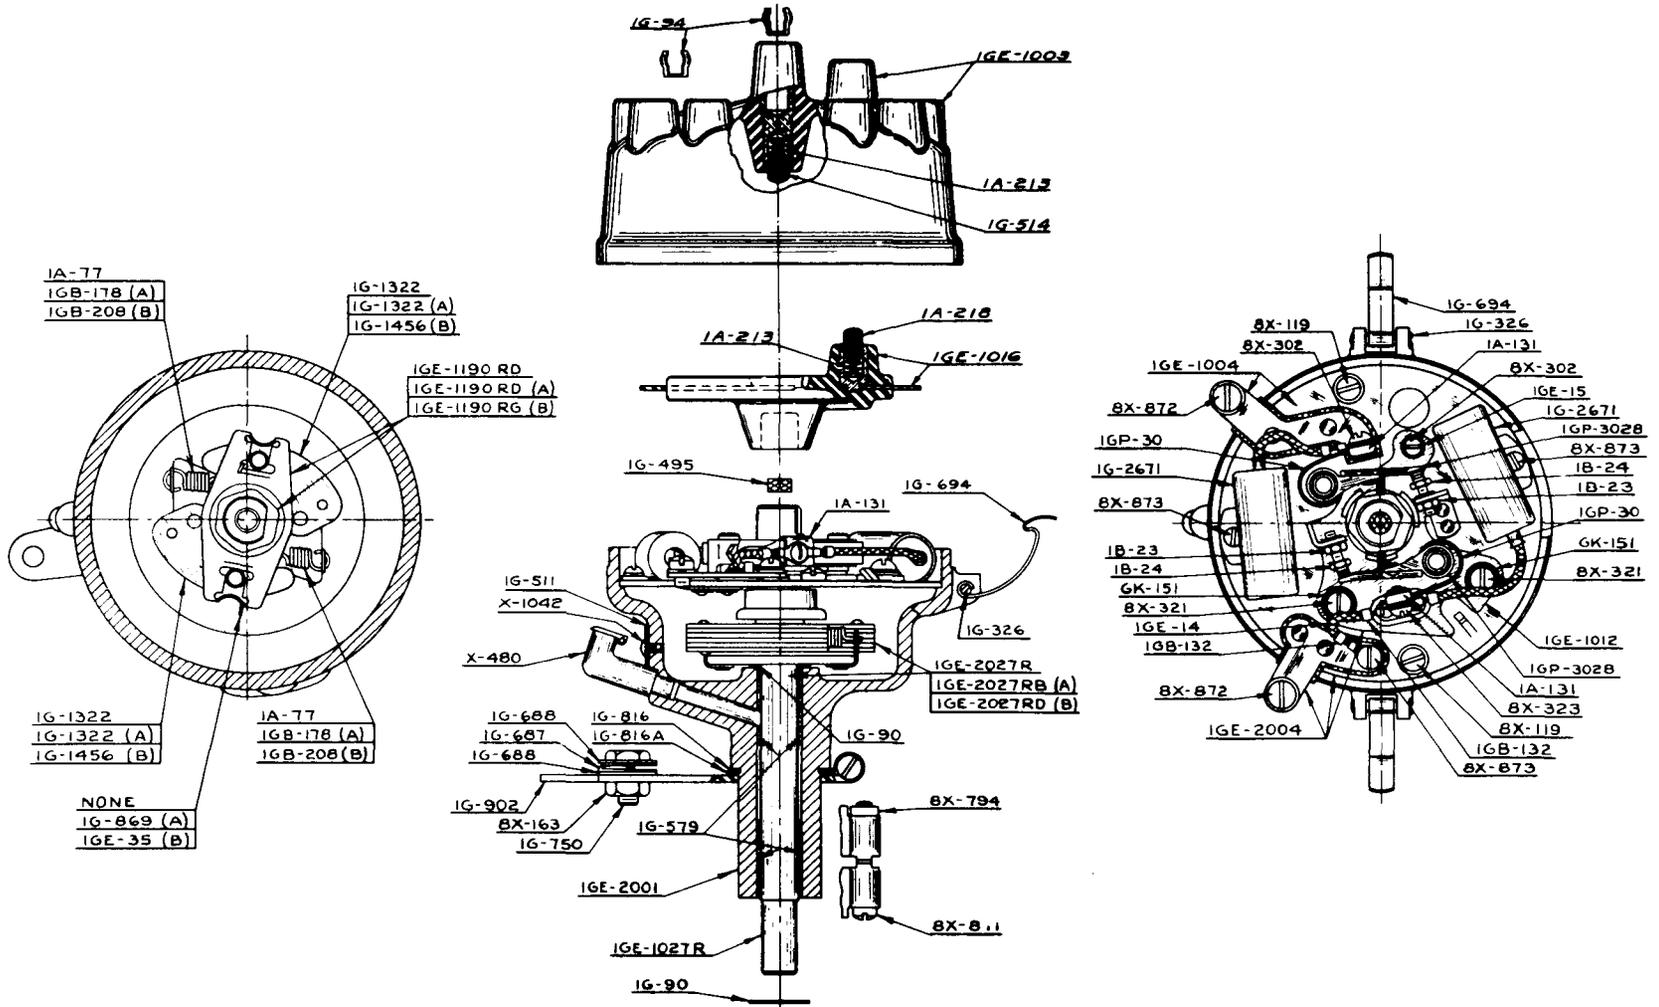

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4008,A DISTRIBUTOR PARTS LIST

IGE-4008,A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	2	Thrust Washer	X-194	4	#6 Lock Washer
IG-94	14	H.T. Wire Terminal	8X-302	2	#6-32x1/4 Rd. Hd. Sc.
IG-495	1	Cam Sleeve Felt Wick	8X-321	2	#10-32x5/16 Rd. Hd. Sc.
IG-816	1	Thrust Washer	8X-323	1	#6-32x5/16 Rd. Hd. Sc.
IGC-24N	1	Advance Control Arm	X-537	2	#10 Lock Washer
*	1	Governor Control Spring	8X-873	3	#6-32x3/16 Fill. Hd. Sc.
IGE-1003	1	Dist. Cap Assy.	X-1012	2	#6 Lock Washer
IA-213	1	Contact Spring	*	1	Drive Shaft & Gov. Assy.
IG-514	1	Contact Spring Plunger	*	2	Weight Spring
IGE-1016	1	Rotor Assy.	*	2	Weight Assy.
IA-213	1	Contact Spring	IGE-1027R	1	Drive Shaft Assy.
IA-218	1	Contact Spring Plunger	8X-86	1	1/4-20x5/8 Hex. Hd. Sc.
*	1	Cam & Stop Plate - 6 cyl. R.H.	8X-119	2	#10-32x1/2 Fill. Hd. Sc.
IGE-2001	1	Dist. Base Assembly	8X-146	1	1/4-20 Hex. Nut
IG-326	2	Hinge Pin	8X-163	1	1/4-20 Hex. Nut
IG-511	1	Name Plate	X-196	4	#10 Lock Washer
IG-579	2	Absorbent Bronze Brg.	X-199	2	1/4 Lock Washer
IG-694	2	Dist. Cap Spring	8X-707	1	1/4-20x1 7/8 Fill. Hd. Sc.
X-480	1	1/4 Oiler - Press in Elbow	8X-872	2	#10-32x1/4 Fill. Hd. Sc.
X-1042	2	#13x3/16 Escutcheon Pin			1 2 3 4 5
IGE-2004	1	Breaker Plate Assy.			(Issued 10-5-36)
GK-151	2	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-2671	2	Condenser Assembly			
IGE-14	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGE-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33	1	Breaker Screw Point			
IGE-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33	1	Breaker Screw Point			
IGP-3028	2	Breaker Arm Assy.			
IGP-30	2	Breaker Arm Spring			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Weight Spring	Weight Sp. Set	Weight Assembly	Cam Assembly	Control Spring
IGE-4008	IGE-2027R	IA-77	IA-77S	IG-1322	IGE-119ORD	None
IGE-4008A	IGE-2027RC	IGE-24	IGE-24S	IG-1456	IGE-119ORF	IGE-35

* See table following parts list for part number applying to assembly wanted.

NOTE:- Use IGP-3028BS breaker point set and * weight spring set in servicing this unit.

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4009, A DISTRIBUTOR PARTS LIST

IGE-4009, A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-9C	2	Thrust Washer	X-194	4	#6 Lock Washer
IG-F4	14	H.T. Wire Terminal	8X-302	2	#6-32x1/4 Rd. Hd. Screw
IG-495	1	Cam Sleeve Felt Wick	8X-321	2	#10-32x5/16 Rd. Hd. Sc.
IG-816	1	Thrust Washer	8X-323	1	#6-32x5/16 Rd. Hd. Sc.
IGC-24N	1	Advance Control Arm	X-537	2	#10 Lock Washer
*	1	Governor Control Spring	8X-873	3	#6-32x3/16 Fill. Hd. Sc.
IGE-1003	1	Dist. Cap Assy.	X-1012	2	#6 Lock Washer
IA-213	1	Contact Spring	*	1	Drive Shaft & Gov. Assy.
IG-514	1	Contact Spring Plunger	*	2	Weight Spring
IGE-1016	1	Rotor Assembly	*	2	Weight Assy.
IA-213	1	Contact Spring	IGE-1027L	1	Drive Shaft Assy.
IA-218	1	Contact Spring Plunger	8X-86	1	1/4-20x5/8 Hex. Hd. Sc.
*	1	Cam & Stop Plate - 6 cyl. L.H.	8X-119	2	#10-32x1/2 Fill. Hd. Sc.
IGE-2001	1	Dist. Base Assy.	8X-146	1	1/4-20 Hex. Nut
IG-326	2	Hinge Pin	8X-163	1	1/4-20 Hex. Nut
IG-511	1	Name Plate	X-196	4	#10 Lock Washer
IG-579	2	Absorbent Bronze Brg.	X-199	2	1/4 Lock Washer
IG-694	2	Dist. Cap Spring	8X-707	1	1/4-20x1 7/8 Fill. Hd. Sc.
X-480	1	1/4 Oiler - Press in Elbow	8X-872	2	#10-32x1/4 Fill. Hd. Sc.
X-1042	2	#13x3/16 Escutcheon Pin			1 2 3 4 5
IGE-2004	1	Breaker Plate Assy.			(Issued 10-5-36)
GK-151	2	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-2671	2	Condenser Assembly			
IGE-14	1	Primary Connector Assy.			
IGE-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGE-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33	1	Breaker Screw Point			
IGE-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33	1	Breaker Screw Point			
IGP-302B	2	Breaker Arm Assembly			
IGP-30	2	Breaker Arm Spring			

Assembly No.	Dr. Shaft & Gov.	Weight Spring	Weight Sp. Set	Weight Assembly	Cam Assembly	Control Spring
IGE-4009	IGE-2027L	IA-77	IA-77S	IG-2322	IGE-1190LA	None
IGE-4009A	IGE-2027LA	IGE-24	IGE-24S	IG-2456	IGE-1190LE	IGE-36

* See table following parts list for part number applying to assembly wanted.

NOTE:- Use IGP-3028BS breaker point set and # weight spring set in servicing this unit.

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4012,
A,B,C DISTRIBUTOR PARTS LIST

IGE-4012,
A,B,C

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Washer, Thrust, Drive Shaft, Lower	*	1	Base Assembly, Dist.
IG-94	14	Terminal, H.T. Wire	IG-326	2	Pin, Hinge, Cap Spring
IG-495	1	Wick, Felt, Cam Sleeve	IG-579A	2	Bearing, Absorbent Bronze
IG-816C	1	Washer, Thrust, Advance Arm	IG-694	2	Spring, Clamp, Cap
IG-853	1	Collar, Shaft, Dist.	X-480	1	Oiler, Elbow, Press in, 1/4
*	2	Spring, Anti-Rattle, Gov.	*	1	Shaft & Gov. Assembly
IGE-1003L	1	Cap Assembly, Dist.	*	1	Spring Set, Gov. Weight
IA-213	1	Spring, Contact	IG-2456	2	Weight, Governor
IG-514	1	Contact, Plunger	IGE-1033L	1	Shaft, Drive
IGE-1016	1	Rotor Assembly	IGK-26	1	Spacer, Cam
IA-213	1	Spring, Contact	IGW-46	1	Washer, Thrust
IA-218	1	Contact, Plunger	SW-213	1	Rivet, Collar, Drive Shaft
IGE-1031	1	Arm, Advance	8X-119	2	Screw, Attaching, Breaker Plate
*	1	Cam, & Stop Plate, 6 cyl., L.H.			Fil. Hd., #10-32x1/2
IGE-2004	1	Plate Assy., Breaker	X-196	4	Lock Washer, Breaker Plate & Terminal Screw, #10
GK-151	2	Washer, Plain, Sub Plate Mtg., #10	8X-872	2	Screw, Terminal, Fil. Hd., #10-32x1/4
IA-131	2	Clip, Spring, Contact Arm			1 2 3 4 5
IG-2671	2	Condenser			(Issued 5-14-45)
IGE-14	1	Lead Assy., Primary			
IGB-132	2	Terminal			
IGE-15	1	Washer, Plain, Sub Plate Mtg., #6			
IGE-1004	1	Plate Assy., Breaker, Partial			
IB-23	1	Nut, Lock, Contact Screw			
IGP-33†	1	Contact, Breaker Screw			
IGE-1012	1	Plate Assy., Sub, Breaker			
IB-23	1	Nut, Lock, Contact Screw			
IGP-33†	1	Contact, Breaker Screw			
IGP-3028†	2	Arm Assy., Breaker			
IGP-30	2	Spring			
X-194	4	Lock Washer, Condenser & Primary Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd., #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd. Hd., #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd., #6-32x5/16			
X-537	2	Lock Washer, Sub Plate Mtg., #10			
X-1012	2	Lock Washer, Condenser Mtg., #6			
8X-1546	3	Screw, Pri. Lead & Condenser Mtg., Fil. Hd., #6-32x5/32			

† Contact Set, Service IGP-3028BS.

* See table following parts list for part number applying to assembly wanted.


Assembly No.	Spring	Cam	Base Assy.	Dr. Shaft Assy.	Spring Set
IGE-4012	IGE-36	IGE-1067L	IGE-2032	IGE-2033L	IG-817S
IGE-4012A	IGE-36	IGE-1067LA	IGE-2032	IGE-2033L	IG-817S
IGE-4012B	IGE-36	IGE-1144L	IGE-2032B	IGE-2033LA	IG-913S
IGE-4012C	IGE-36B	IGE-1067LC	IGE-2032C	IGE-2033LB	IG-817SS

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGE-4012, A, B, C DISTRIBUTOR ILLUSTRATION

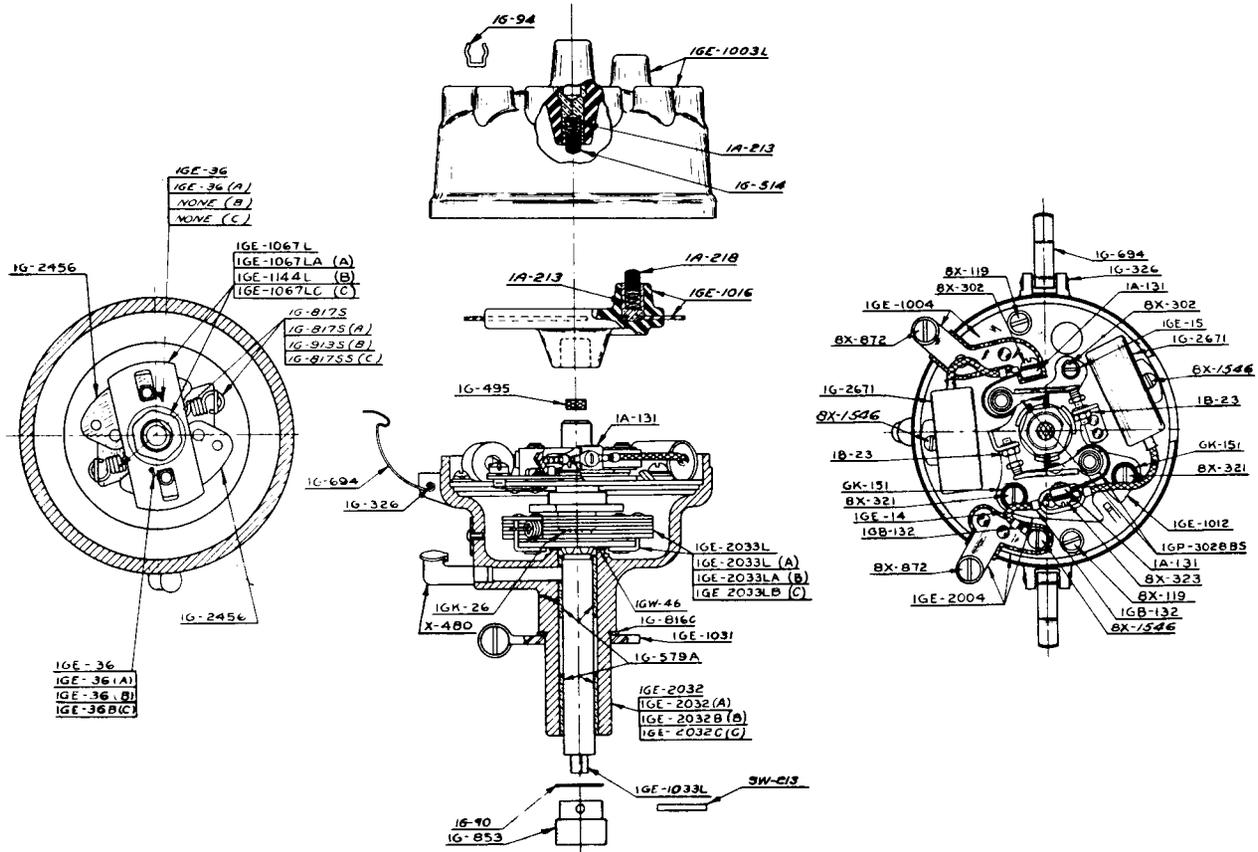

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4013 DISTRIBUTOR PARTS LIST

IGE-4013

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	2					Thrust Washer
IG-94	14					H.T. Wire Terminal
IG-495	1					Cam Sleeve Felt Wick
IG-644	1					Dist. Drive Coupling
IG-816	1					Thrust Washer
IGB-247	1					Dist. Drive Rivet
IGC-24N	1					Advance Control Arm
IGE-1003	1					Dist. Cap Assy.
IA-213	1					Contact Spring
IG-514	1					Contact Spring Plunger
IGE-1016	1					Rotor Assembly
IA-213	1					Contact Spring
IA-218	1					Contact Spring Plunger
IGE-119ORD	1					Cam & Stop Plate - 6 cyl. R.H.
IGE-2001	1					Dist. Base Assy.
IG-326	2					Hinge Pin
IG-511	1					Name Plate
IG-579	2					Absorbent Bronze Brg.
IG-694	2					Dist. Cap Spring
X-480	1					1/4 Oiler - Press in Elbow
X-1042	2					#13x3/16 Escutcheon Pin
IGE-2004	1					Breaker Plate Assy.
GK-151	2					Plain Steel Washer
IA-131	2					Breaker Arm Spring Clip
IG-2671	2					Condenser Assembly
IGE-14	1					Primary Connector Assy.
IGB-132	2					Terminal
IGE-15	1					#6 Plain Washer
IGE-1004	1					Breaker Plate Part Assy.
IB-23	1					Breaker Point Lock Nut
IGP-33	1					Breaker Screw Point
IGE-1012	1					Breaker Sub-Plate Assy.
IB-23	1					Breaker Point Lock Nut
IGP-33	1					Breaker Screw Point
IGP-3028	2					Breaker Arm Assy.
IGP-30	2					Breaker Arm Spring
X-194	4					#6 Lock Washer
8X-302	2					#6-32x1/4 Rd. Hd. Screw
8X-321	2					#10-32x5/16 Rd. Hd. Sc.
8X-323	1					#6-32x5/16 Rd. Hd. Screw
X-537	2					#10 Lock Washer
8X-873	3					#6-32x3/16 Fill. Hd. Sc.
X-1012	2					#6 Lock Washer
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGE-202ORA	1					Drive Shaft & Gov. Assy.
IA-77	2					Weight Spring
IG-1322	2					Weight Assy.
IGE-102OR	1					Drive Shaft Assy.
8X-86	1					1/4-20x5/8 Hex. Hd. Screw
8X-119	2					#10-32x1/2 Fill. Hd. Sc.
8X-146	1					1/4-20 Hex. Nut
8X-163	1					1/4-20 Hex. Nut
X-196	4					#10 Lock Washer
X-199	2					1/4 Lock Washer
8X-707	1					1/4-20x1 7/8 Fill. Hd. Sc.
8X-872	2					#10-32x1/4 Fill. Hd. Screw
		1	2	3	4	5


(Issued 3-2-36)

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assemble as needed."

IGE-4013 DISTRIBUTOR ILLUSTRATION

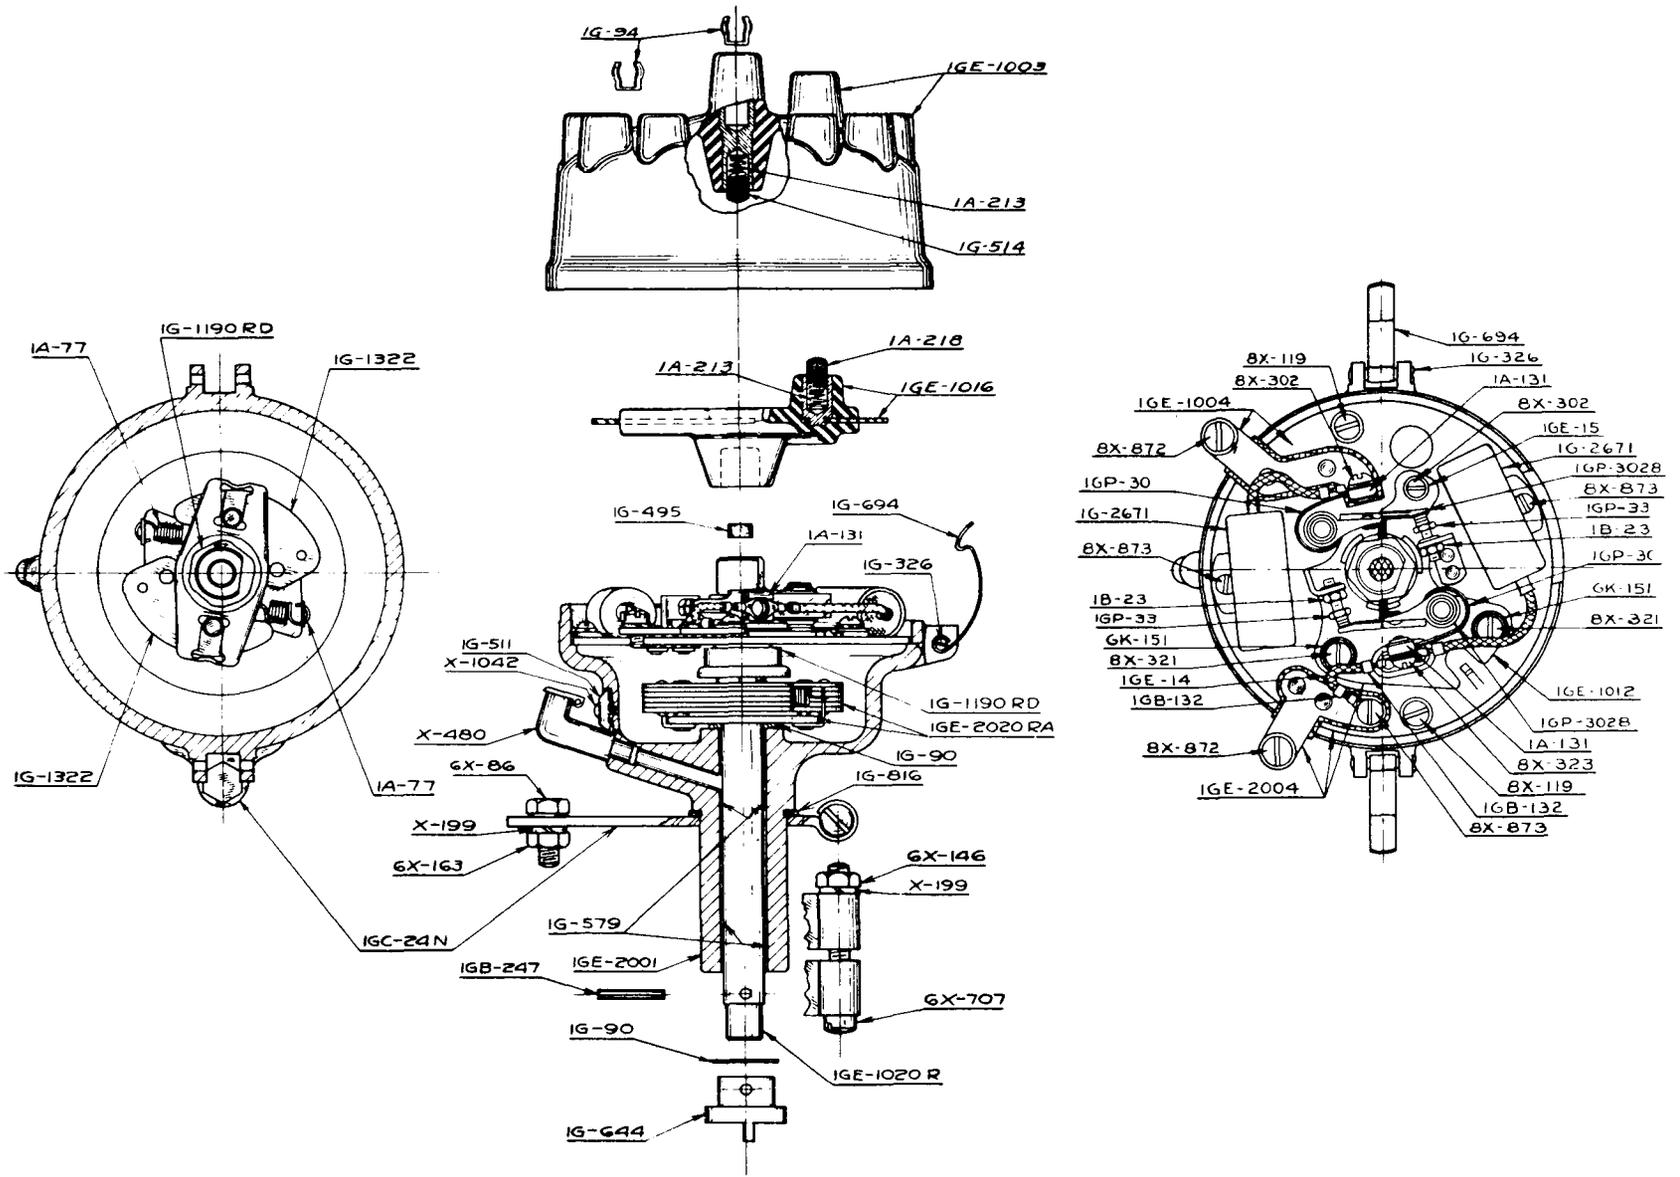

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4014A DISTRIBUTOR PARTS LIST

IGE-4014A


Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GK-36	1	Dist. Gear - Follower	IGE-2026RA	1	Drive Shaft & Gov. Assy.
IG-90	2	Thrust Washer	IA-77	2	Weight Spring
IG-94	14	H. T. Wire Terminal	IG-1322	2	Weight Assembly
IG-495	1	Cam Sleeve Felt Wick	IGE-1026R	1	Drive Shaft Assy.
IG-816	1	Thrust Washer	6X-86	1	1/4-20x5/8 Hex. Hd. Screw
IG-816A	1	Thrust Washer	6X-119	2	#10-32x1/2 Fill. Hd. Screw
IG-860A	1	Hold Down Arm	6X-163	1	1/4-20 Hex. Nut
IGB-247	1	Dist. Drive Rivet	X-196	4	#10 Lock Washer
IGE-1003	1	Dist. Cap Assembly	X-199	1	1/4 Lock Washer
IA-213	1	Contact Spring	6X-794	1	#10-32 Square Nut
IG-514	1	Contact Spring Plunger	6X-871	1	#10-32x1 3/8 Fill. Hd. Screw
IGE-1016	1	Rotor Assembly	6X-872	2	#10-32x1/4 Fill. Hd. Screw
IA-213	1	Contact Spring			1 2 3 4 5
IA-218	1	Contact Spring Plunger			
IGE-1190RD	1	Cam & Stop Plate - 6 cyl. R.H.			(Issued 10-11-34) (R-8-7-36)
IGE-2001	1	Dist. Base Assembly			
IG-326	2	Hinge Pin			
IG-511	1	Name Plate			
IG-579	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-480	1	1/4 Oiler-Press in Elbow			
X-1042	2	#13x3/16 Escutcheon Pin			
IGE-2004	1	Breaker Plate Assy.			
GK-151	2	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-2671	2	Condenser Assy.			
IGB-3664	2	Breaker Arm Assy.			
IGB-209	2	Breaker Arm Spring			
IGE-14	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGE-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IB-24	1	Breaker Point Screw			
IGE-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IB-24	1	Breaker Point Screw			
X-194	4	#6 Lock Washer			
8X-302	2	#6-32x1/4 Rd. Hd. Screw			
8X-321	2	#10-32x5/16 Rd. Hd. Screw			
8X-323	1	#6-32x5/16 Rd. Hd. Screw			
X-537	2	#10 Lock Washer			
8X-873	3	#6-32x3/16 Fill. Hd. Screw			
X-1012	2	#6 Lock Washer			
		1 2 3 4 5			

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGE-4014A DISTRIBUTOR ILLUSTRATION

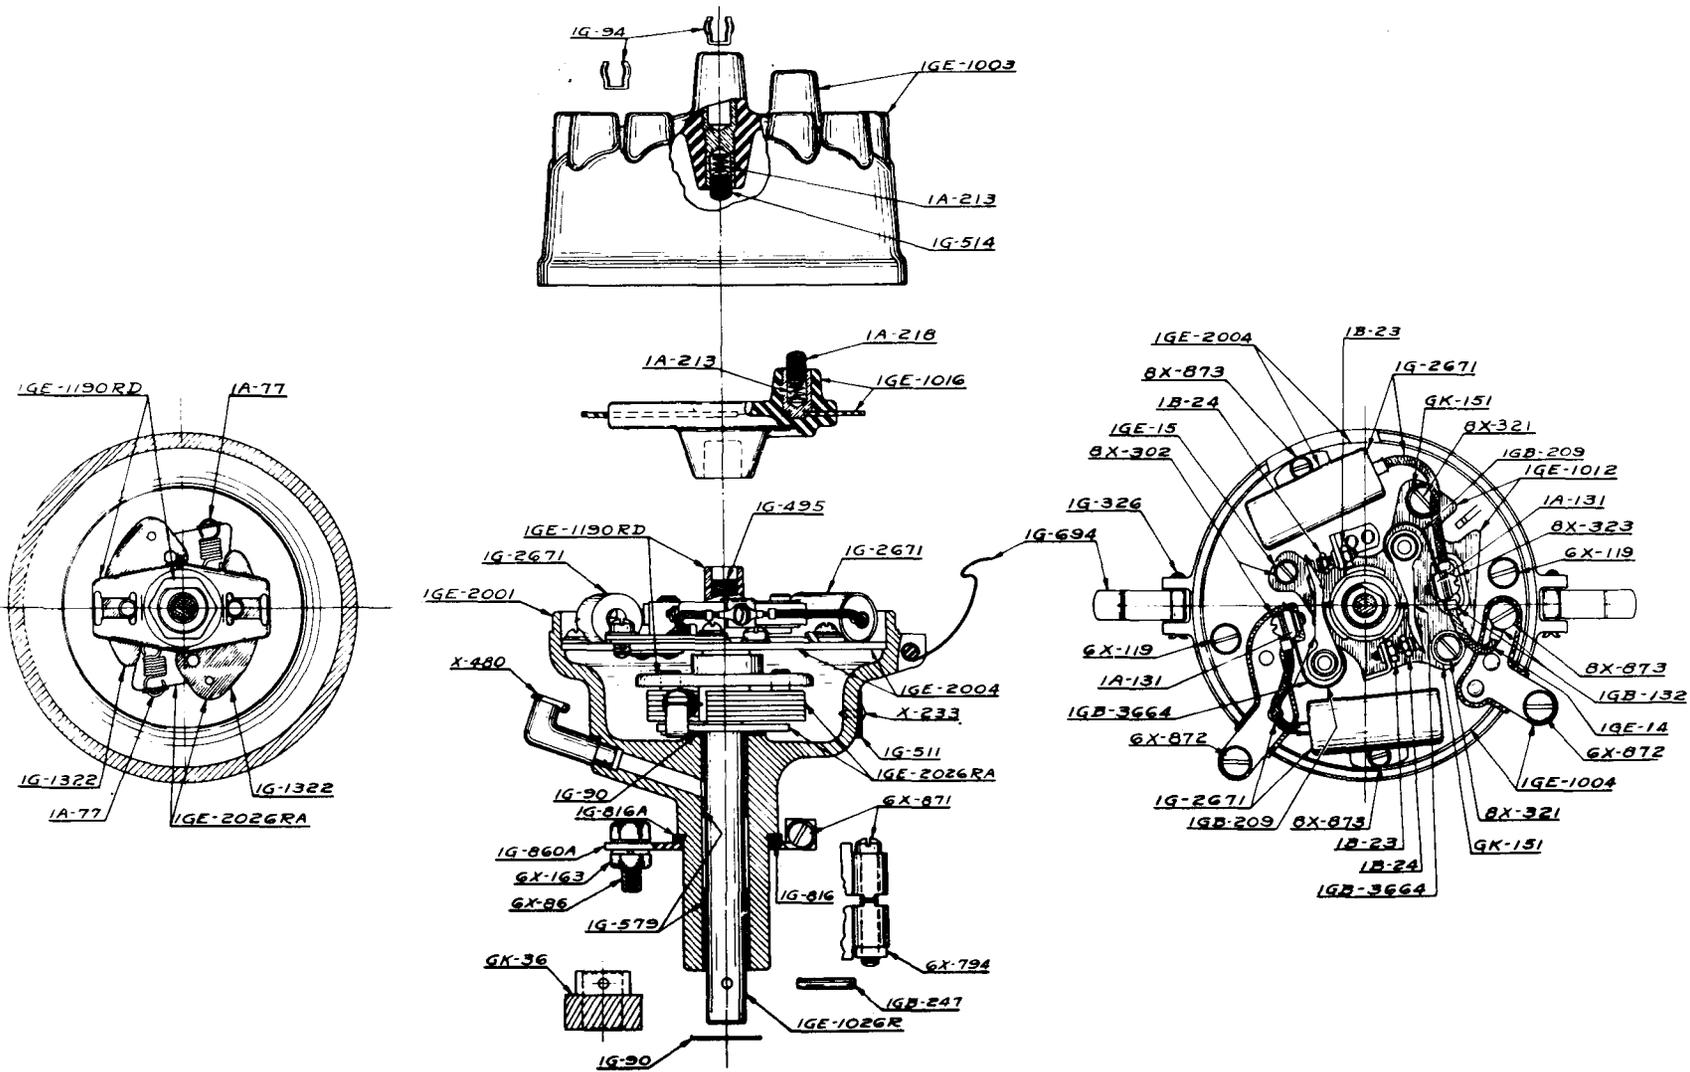

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4015 DISTRIBUTOR PARTS LIST

IGE-4015

PRELIMINARY

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	1					Thrust Washer
IG-94	14					H. T. Wire Terminal
IG-495	1					Cam Sleeve Felt Wick
IGB-162	1					Thrust Washer
IGC-2086A	1					Advance Control Arm Assy.
IGE-35	1					Anti-Rattle Spring
IGE-1003	1					DISTRIBUTOR CAP ASSEMBLY
IA-213	1					Contact Spring
IG-514	1					Contact Spring Plunger
IGE-1016	1					ROTOR ASSEMBLY
IA-213	1					Contact Spring
IA-218	1					Contact Spring Plunger
IGE-1067R	1					Cam & Stop Plate - 6 Cyl. R.H.
IGE-2004	1					Breaker Plate Assembly
GK-151	2					Plain Steel Washer
IA-131	2					Breaker Arm Spring Clip
IG-2671	2					CONDENSER ASSEMBLY
IGE-14	1					Primary Connector Assy.
IGB-132	2					Terminal
IGE-15	1					#6 Plain Washer
IGE-1004	1					Breaker Plate Part Assy
IB-23	1					Brkr. Point Lock Nut
IGP-33†	1					Breaker Screw Point
IGE-1012	1					Breaker Sub Plate Assy.
IB-23	1					Brkr. Point Lock Nut
IGP-33†	1					Breaker Screw Point
IGP-3028†	2					Breaker Arm Assembly
IGP-30	2					Breaker Arm Spring
X-194	4					#6 Lock Washer
8X-302	2					#6-32x1/4 Rd. Hd. Screw
8X-321	2					#10-32x5/16 Rd. Hd. Sc.
8X-323	1					#6-32x5/16 Rd. Hd. Sc.
X-537	2					#10 Lock Washer
X-1012	2					#6 Lock Washer
8X-1546	3					#6-32x5/32 Fill. Hd. Sc.
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGE-2042R	1					Drive Shaft & Gov. Assy.
IG-775S	1					Weight Spring Set
IG-1456	2					Weight Assembly
IGE-1042R	1					Drive Shaft Assembly
IGE-2043	1					Distributor Base Assembly
IG-326	2					Hinge Pin
IG-511	1					Name Plate
IG-579A	2					Absorbent Bronze Brg.
IG-694	2					Dist. Cap Spring
X-480	1					1/4 Oiler - Press in Elbow
X-1042	2					#13x3/16 Escutcheon Pin
IGS-99	1					Washer
8X-119	2					#10-32x1/2 Fill. Hd. Screw
X-196	4					#10 Lock Washer
8X-872	2					#10-32x1/4 Fill. Hd. Screw
		1	2	3	4	5

(Issued 10-6-41)

† SERVICE CONTACT SET IGP-3028BS.

UNIT	APPLICATION
IGE-4015	Oshkosh Truck, Biederman

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4016 DISTRIBUTOR PARTS LIST

IGE-4016

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGE-2032A	1	Dist. Base Assembly
IG-94	14	H. T. Wire Terminal	IG-326	2	Hinge Pin
IG-495	1	Cam Sleeve Felt Wick	IG-511	1	Name Plate
IG-816	1	Thrust Washer	IG-579A	2	Absorbent Bronze Brg.
IG-816A	1	Thrust Washer	IG-694	2	Dist. Cap Spring
IGB-162	1	Thrust Washer	X-480	1	1/4 Oiler - Press in Elbow
IGC-53B	1	Advance Control Arm	X-1042	2	#13x3/16 Escutcheon Pin
IGE-36	1	Governor Control Spring	IGE-2045L	1	Drive Shaft & Gov. Assy.
IGE-1003L	1	Dist. Cap Assembly	IG-2456	2	Weight Assy.
IA-213	1	Contact Spring	IGC-42†	2	Weight Spring
IG-514	1	Contact Spring Plunger	IGE-1045L	1	Drive Shaft Assy.
IGE-1016	1	Rotor Assembly	IGK-26	1	Washer - .020" Thick
IA-213	1	Contact Spring	8X-119	2	#10-32x1/2 Fill. Hd. Screw
IA-216	1	Contact Spring Plunger	X-196	4	#10 Lock Washer
IGE-1067LB	1	Cam & Stop Plate - 6 cyl. L.H.	8X-794	1	#10-32 Square Nut
IGE-2004	1	Breaker Plate Assy.	8X-871	1	#10-32x1 3/8 Fill. Hd. Sc.
GK-151	2	Plain Steel Washer	8X-872	2	#10-32x1/4 Fill. Hd. Screw
IA-131	2	Breaker Arm Spring Clip			1 2 3 4 5
IG-2671	2	Condenser Assembly			
IGE-14	1	Primary Connector Assy.			(Issued 8/12/38)
IGB-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGE-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
IGE-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
IGP-302B†	2	Breaker Arm Assy.			
IGP-30	2	Breaker Arm Spring			
X-194	4	#6 Lock Washer			
8X-302	2	#6-32x1/4 Rd. Hd. Screw			
8X-321	2	#10-32x5/16 Rd. Hd. Sc.			
8X-323	1	#6-32x5/16 Rd. Hd. Sc.			
X-537	2	#10 Lock Washer			
8X-873	3	#6-32x3/16 Fill. Hd. So.			
X-1012	2	#6 Lock Washer			
		1 2 3 4 5			

† Service Breaker Point Set IGP-302BBS & Service Weight Spring Set IGC-42S.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4017, A DISTRIBUTOR PARTS LIST

IGE-4017, A

(Issued 10-30-53)


Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	Washer, Thrust, Drive Shaft, Lower	12X-537	2	Lockwasher, Sub Plate Mounting, #10
IG-94	14	Terminal, H. T. Wire	8X-1546	3	Screw, Primary Lead & Condenser Mtg., Fill. Hd. #6-32x5/32
IG-495	1	Wick, Felt, Cam Sleeve	IGE-2032A	1	Base Assembly, Distributor
IG-816	1	Washer, Thrust, Advance Arm, .065" Thick	IG-326	2	Pin, Hinge, Cap Spring
IG-816A	1	Washer, Thrust, Advance Arm, .032" Thick	IG-579A	2	Bearing, Abs. Bronze
IG-1456	2	Weight, Governor	IG-694	2	Spring, Clamp, Cap
IGC-1053B	1	Arm, Advance	**	1	Spring Set, Gov. Weight
IGE-35	1	Spring, Anti-Rattle	IGS-99	1	Spacer, Cam
IGE-1003	1	CAP ASSY., DISTRIBUTOR	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IG-514	1	Contact, Plunger	IGT-117	1	Felt Wick
IG-515A	1	Spring, Contact	8X-119	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x1/2
IGE-1016	1	ROTOR ASSEMBLY	12X-196	4	Lockwasher, Breaker Plate & Terminal Screw, #10
IA-218	1	Contact, Plunger	X-480	1	Oiler
IG-515A	1	Spring, Contact	8X-872	2	Screw, Terminal, Fill. Hd. #10-32x1/4
IGE-1045RA	1	Shaft, Drive	** See table following parts list for part number applying to assembly wanted.		
**	1	Cam & Stop Plate, 6 Cyl. R. H.			
IGE-2004	1	Plate Assy., Breaker			
GK-151	2	Washer, Plain, Sub Plate Mounting, #10			
IA-131	2	Clip, Spring, Contact Arm			
IAT-14	1	Lead Assy., Primary			
IB-23	2	Nut, Lock, Contact Screw			
IG-2671	2	CONDENSER			
IGE-15	1	Washer, Plain, Sub Plate Mounting, #6			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub Breaker	Assembly No.	Cam & Stop Plate	Spring Set Gov. Weight
IGP-3028BS	2	Contact Set, Breaker	IGE-4017	IGE-1067RA	IGC-42S
12X-194	6	Lockwasher, Condenser Mtg. & Primary Lead Screw, #6	IGE-4017A	IGE-1067RC	IGB-328BS
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd. Hd. #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Lead, Rd. Hd. #6-32x5/16			

UNIT	APPLICATION
IGE-4017	Kermath Marine
IGE-4017A	Kermath Marine

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4019,A DISTRIBUTOR PARTS LIST

IGE-4019,A


Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			
IG-90	1	Thrust Washer	*	1	Drive Shaft & Gov. Assy.
IG-94	14	H. T. Wire Terminal	IG-817†	1	Weight Spring
IG-495	1	Cam Sleeve Felt Wick	IG-863†	1	Weight Spring
IG-816	1	Thrust Washer	IG-2456	2	Weight Assy.
IG-853	1	Dist. Drive Sleeve	IGE-1033L	1	Drive Shaft Assy.
IGB-162	1	Thrust Washer	*	1	Dist. Base Assy.
IGE-36B	1	Governor Control Spring	IG-326	2	Hinge Pin
IGE-1003L	1	Dist. Cap Assy.	*	1	Name Plate
IA-213	1	Contact Spring	IG-579A	2	Absorbent Bronze Brg.
IG-514	1	Contact Spring Plunger	IG-694	2	Dist. Cap Spring
IGE-1016	1	Rotor Assy.	X-480	1	1/4 Oiler - Press in Elbow
IA-213	1	Contact Spring	X-1042	2	#13x3/16 Escutcheon Pin
IA-218	1	Contact Spring Plunger	IGK-26	1	Washer - .020" Thick
IGE-1048	1	Hold Down Arm Assy.	SW-213	1	Dist. Drive Rivet
8X-146	1	1/4-20 Hex. Nut	8X-119	2	#10-32x1/2 Fill. Hd. Screw
X-199	1	1/4 Lock Washer	X-196	4	#10 Lock Washer
8X-707	1	1/4-20x1 7/8 Fill. Hd. So	8X-872	2	#10-32x1/4 Fill. Hd. Screw
*	1	Cam & Stop Plate- 6 Cyl.L.H.			1 2 3 4 5
IGE-2004	1	Breaker Plate Assy.			(Issued 10-18-38)
GK-151	2	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-2671	2	Condenser Assy.			
IGE-14	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGE-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
IGE-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
IGF-3028†	2	Breaker Arm Assy.			
IGP-30	2	Breaker Arm Spring			
X-194	4	#6 Lock Washer			
8X-302	2	#6-32x1/4 Rd. Hd. Screw			
8X-321	2	#10-32x5/16 Rd. Hd. Sc.			
8X-323	1	#6-32x5/16 Rd. Hd. Sc.			
X-537	2	#10 Lock Washer			
8X-873	3	#6-32x3/16 Fill. Hd. Sc.			
X-1012	2	#6 Lock Washer			
		1 2 3 4 5			

Assy. No.	Cam & Stop Plate Assy.	Dr. Shaft & Gov. Assy.	Dist. Base Assy.	Name Plate
IGE-4019	IGE-1067LC	IGE-2033LB	IGE-2050	IG-511A
IGE-4019A	IGE-1144LA	IGE-2033LB-1	IGE-2050A	IG-511

† Service Breaker Point Set IGP-3028BS, & Service Weight Spring Set IG-817SS.

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking su -parts the complete part can be assembled as needed."

IGE-4019A DISTRIBUTOR ILLUSTRATION

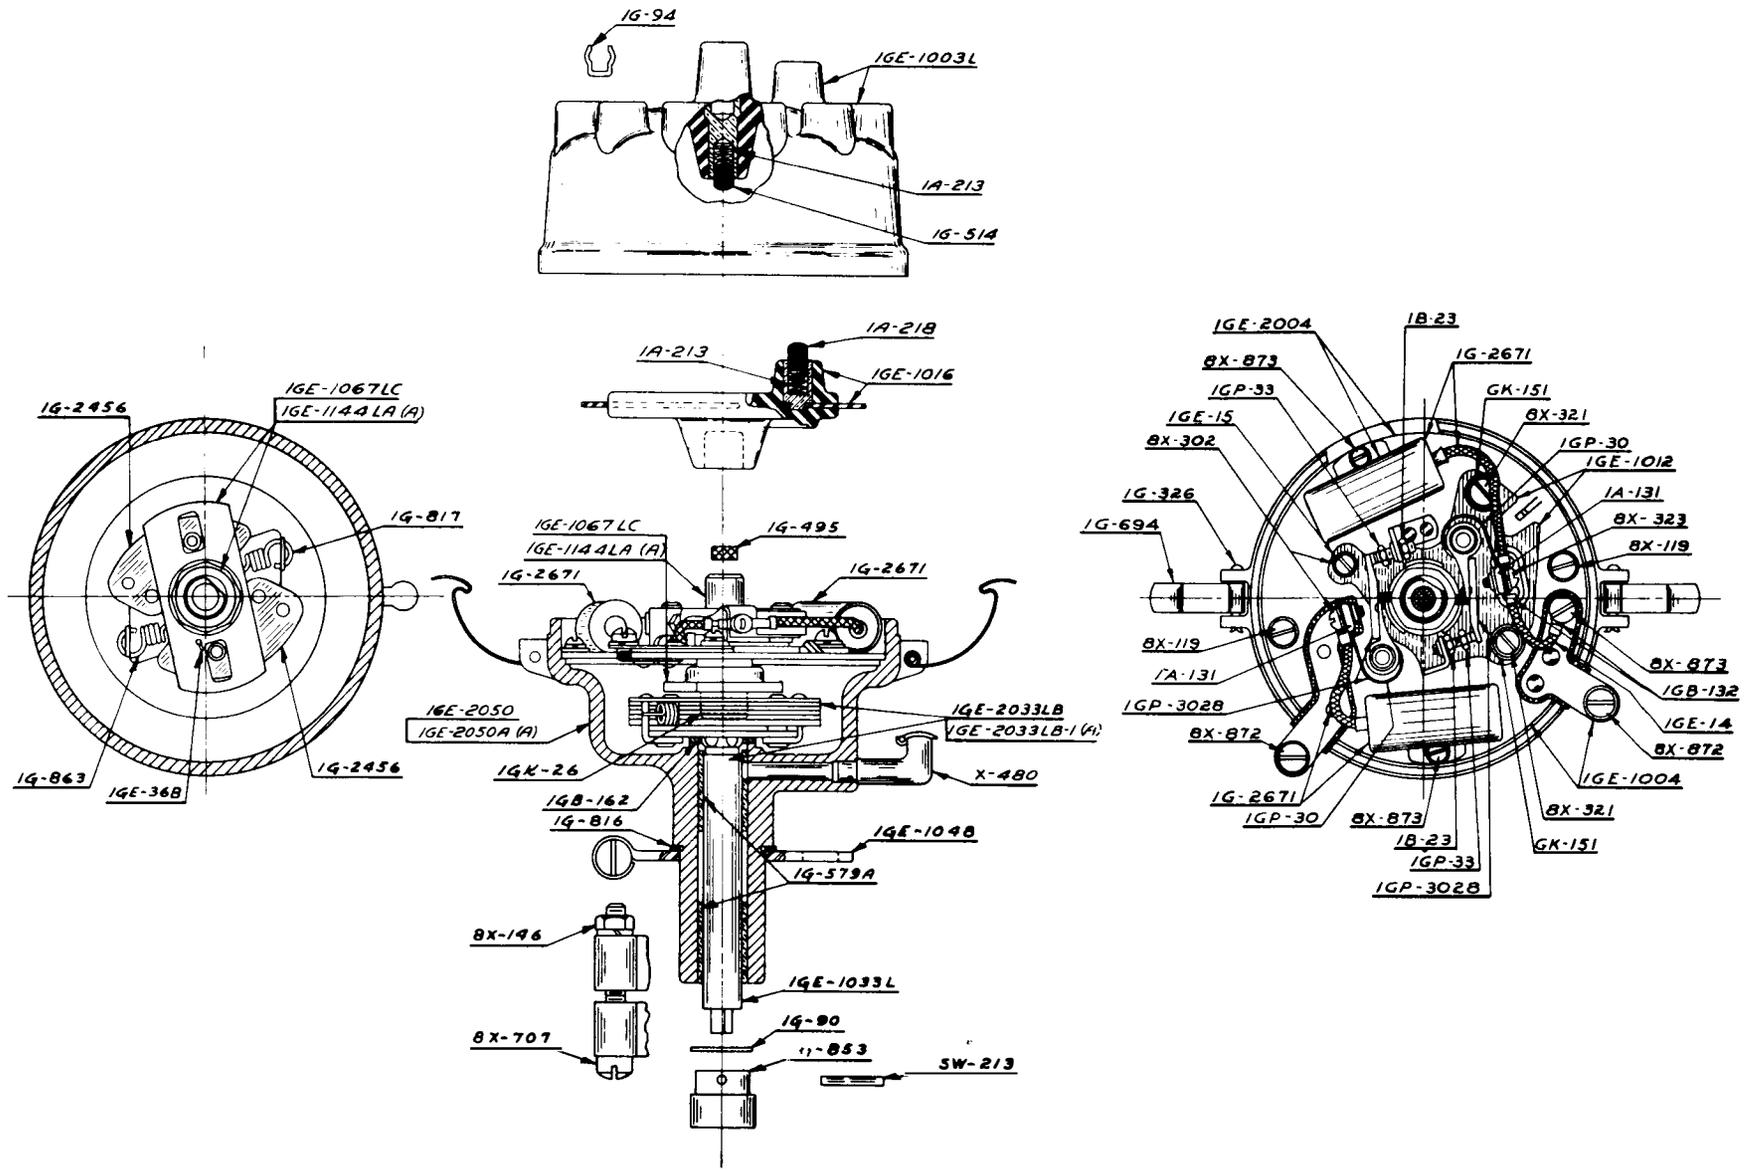

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4020 DISTRIBUTOR PARTS LIST

IGE-4020

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	2	Thrust Washer				
IG-94	14	H. T. Wire Terminal				
IG-495	1	Cam Sleeve Felt Wick				
IG-816	1	Thrust Washer				
IG-816A	1	Thrust Washer				
IG-2902F-5	1	Advance Control Arm Assy.				
IG-687	1	Spring Washer				
IG-688	2	Advance Control Washer				
IG-750	1	Advance Control Screw				
8X-163	1	1/4-20 Hex. Nut				
8X-794	1	#10-32 Square Nut				
8X-870	1	#10-32x5/16 Fill. Hd. Sc.				
8X-871	1	#10-32x1 3/8 Fill. Hd. Sc.				
IGB-264	3	Rubber Plug				
IGE-35	1	Governor Control Spring				
IGE-1003	1	DISTRIBUTOR CAP ASSY.				
IA-213	1	Contact Spring				
IG-514	1	Contact Spring Plunger				
IGE-1016	1	ROTOR ASSEMBLY				
IA-213	1	Contact Spring				
IA-218	1	Contact Spring Plunger				
IGE-1067RB	1	Cam & Stop Plate - 6 Cyl.R.H.				
IGE-2004	1	Breaker Plate Assembly				
GK-151	2	Plain Steel Washer				
IA-131	2	Brkr. Arm Spring Clip				
IG-2671	2	CONDENSER ASSEMBLY				
IGE-14	1	Primary Connector Assy.				
IGB-132	2	Terminal				
IGE-15	1	#6 Plain Washer				
IGE-1004	1	Brkr. Plate Part Assy.				
IB-23	1	Brkr. Point Lock Nut				
IGP-331	1	Breaker Screw Point				
IGE-1012	1	Breaker Sub-Plate Assy.				
IB-23	1	Brkr. Point Lock Nut				
IGP-331	1	Breaker Screw Point				
IGP-30281	2	Breaker Arm Assembly				
IGP-30	2	Breaker Arm Spring				
X-194	4	#6 Lock Washer				
8X-302	2	#6-32x1/4 Rd. Hd. Screw				
8X-321	2	#10-32x5/16 Rd. Hd. Sc.				
8X-323	1	#6-32x5/16 Rd. Hd. Sc.				
X-537	2	#10 Lock Washer				
X-1012	2	#6 Lock Washer				
8X-1546	3	#6-32x5/32 Fill. Hd. Sc.				
	1	2	3	4	5	

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGE-2045RA	1	Drive Shaft & Gov. Assy.				
IG-1322	2	Weight Assembly				
ICB-1781	2	Weight Spring				
IGE-1045R	1	Drive Shaft Assy.				
IGE-2051	1	Distributor Base Assy.				
IG-326	2	Hinge Pin				
IG-511	1	Name Plate				
IG-579A	2	Absorbent Bronze Brg.				
IG-694	2	Dist. Cap Spring				
X-480	1	1/4 Oiler - Press in Elbow				
X-1042	2	#13x3/16 Escutcheon Pin				
IGK-26	1	Washer - .020" Thick				
IGP-41	2	Terminal Slot Cover				
8X-119	2	#10-32x1/2 Fill. Hd. Screw				
X-196	4	#10 Lock Washer				
8X-872	2	#10-32x1/4 Fill. Hd. Screw				
		1	2	3	4	5

(Issued 8-22-39)


† Service BREAKER POINT SET IGP-3028BS & Service Weight Spring Set IGB-178S.

UNIT	APPLICATION
IGE-4020	Oshkosh

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

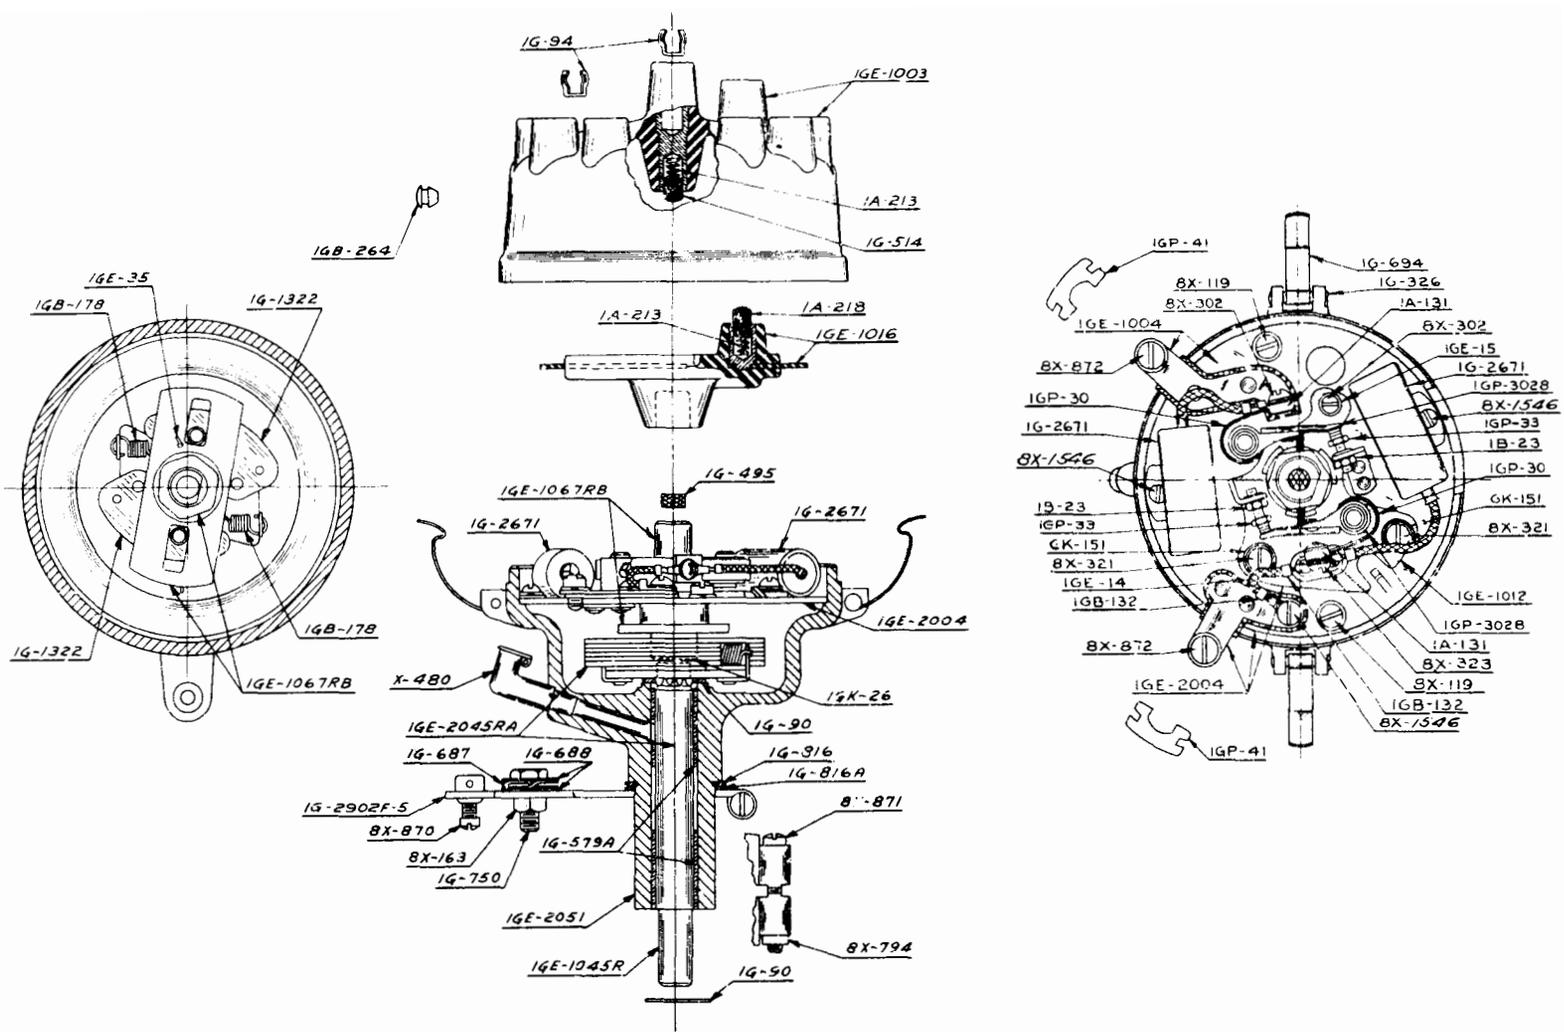

IGE-4020 DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4021,-1 DISTRIBUTOR PARTS LIST

IGE-4021,-1

PRELIMINARY

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	1					Thrust Washer
IG-94	14					H. T. Wire Terminal
IG-495	1					Cam Sleeve Felt Wick
IG-816A†	1					Thrust Washer
IGB-162	1					Thrust Washer
IGC-2024N-17†	1					Advance Control Arm Assy.
IGE-35	1					Anti-Rattle Spring
IGE-1003	1					DISTRIBUTOR CAP ASSEMBLY
IA-213	1					Contact Spring
IG-514	1					Contact Spring Plunger
IGE-1016	1					ROTOR ASSEMBLY
IA-213	1					Contact Spring
IA-218	1					Contact Spring Plunger
IGE-1144R	1					Cam & Stop Plate - 6 Cyl. R.H.
IGE-2004	1					Breaker Plate Assembly
GK-151	2					Plain Steel Washer
IA-131	2					Breaker Arm Spring Clip
IG-2671	2					CONDENSER ASSEMBLY
IGE-14	1					Primary Connector Assy.
IGB-132	2					Terminal
IGE-15	1					#6 Plain Washer
IGE-1004	1					Breaker Plate Part Assy.
IB-23	1					Brkr. Point Lock Nut
IGP-33†	1					Breaker Screw Point
IGE-1012	1					Breaker Sub Plate Assy.
IB-23	1					Brkr. Point Lock Nut
IGP-33†	1					Breaker Screw Point
IGP-3028†	2					Breaker Arm Assembly
IGP-30	2					Breaker Arm Spring
X-194	4					#6 Lock Washer
8X-302	2					#6-32x1/4 Rd. Hd. Screw
8X-321	2					#10-32x5/16 Rd. Hd. Sc.
8X-323	1					#6-32x5/16 Rd. Hd. Sc.
X-537	2					#10 Lock Washer
X-1012	2					#6 Lock Washer
8X-1546	3					#6-32x5/32 Fill. Hd. Sc.
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGE-2052	1					Distributor Base Assembly
IG-326	2					Hinge Pin
IG-511	1					Name Plate
IG-570A	2					Absorbent Bronze Brg.
IG-694	2					Dist. Cap Spring
X-480	1					1/4 Oiler - Press in Elbow
X-1042	2					#13x3/16 Escutcheon Pin
IGE-2053R	1					Drive Shaft & Gov. Assy.
IG-1456	2					Weight Assembly
IGE-29S	1					Weight Spring Set
IGE-1053R	1					Drive Shaft Assembly
IGS-99	1					Washer
8X-119	2					#10-32x1/2 Fill. Hd. Screw
X-196	4					#10 Lock Washer
8X-872	2					#10-32x1/4 Fill. Hd. Screw
		1	2	3	4	5

(Issued 10-6-41)

† SERVICE CONTACT SET IGP-3028BS.

† Used with assemblies having the suffix "-1".

UNIT	APPLICATION
IGE-4021,-1	Kermath

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4023 DISTRIBUTOR PARTS LIST

IGE-4023

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	1 2 3 4 5 Washer, Thrust, Drive Shaft, Lower	IGE-2045RB	1	1 2 3 4 5 Shaft & Gov. Assy.
IG-94	14	Terminal, H.T. Wire	IG-1456	2	Weight, Governor
IG-495	1	Wick, Felt, Cam Sleeve	IGE-30S	1	Spring Set, Gov. Weight
IG-816	1	Washer, Thrust, Advance Arm	IGE-1045R	1	Shaft, Drive
IGC-2024N-2	1	Arm, Advance	IGE-2051	1	Base Assy., Dist.
IGE-35	1	Spring, Anti-Rattle, Gov.	IG-326	2	Pin, Hinge, Cap Spring
IGE-1003	1	CAP ASSY., DIST.	IG-579A	2	Bearing, Absorbent Bronze
IG-514	1	Contact, Plunger	IG-694	2	Spring, Clamp, Cap
IG-515A	1	Spring, Contact	X-480	1	Oiler, Elbow, Press in, 1/4
IGE-1016	1	ROTOR ASSY.	IGS-99	1	Spacer, Cam
IA-218	1	Contact, Plunger	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IG-515A	1	Spring, Contact	8X-119	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x1/2
IGE-1144RA	1	Cam & Stop Plate, 6 Cyl., R.H.	X-196	4	Lockwasher, Breaker Plate & Terminal Sc., #10
IGE-2004	1	Plate Assy., Breaker	8X-872	2	Screw, Terminal, Fill. Hd. #10-32x1/4
GK-151	2	Washer, Plain, Sub Plate Mtg., #10			1 2 3 4 5
IA-131	2	Clip, Spring, Contact Arm			
IB-23	2	Nut, Lock, Contact Screw			
IG-2671	2	CONDENSER			
IGE-15	1	Washer, Plain, Sub Plate Mtg., #6			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub, Breaker			
IGP-3028BS	1	CONTACT SET, BREAKER			
IGS-89	1	Lead Assy.			
12X-194	4	Lockwasher, Condenser & Pri. Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd. Hd. #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd. #6-32x5/16			
12X-537	2	Lockwasher, Sub Plate Mtg., #10			
12X-1012	2	Lockwasher, Condenser Mtg., #6			
8X-1546	3	Screw, Pri. Lead & Condenser Mtg., Fill. Hd. #6-32x5/32			

UNIT	APPLICATION
IGE-4023	Kermath

Printed in U. S. A.

(Issued 4-26-48)

File in
Equipment & Parts List Binder

NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4024 DISTRIBUTOR PARTS LIST

IGE-4024

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	1					Thrust Washer
IG-94	14					H. T. Wire Terminal
IG-495	1					Cam Sleeve Felt Wick
IG-816C	1					Thrust Washer
IG-853	1					Dist. Drive Sleeve
IGE-35A	1					Governor Control Spring
IGE-1003	1					DISTRIBUTOR CAP ASSY.
IA-213	1					Contact Spring
IG-514	1					Contact Spring Plunger
IGE-1016	1					ROTOR ASSEMBLY
IA-213	1					Contact Spring
IA-218	1					Contact Spring Plunger
IGE-1048	1					Hold Down Arm Assembly
EX-146	1					1/4-20 Hex. Nut
X-199	1					1/4 Lock Washer
EX-707	1					1/4-20x1 7/8 Fill. Hd. Screw
IGE-1144RA	1					Cam & Stop Plate - 6 cyl. R.H.
IGE-2004	1					Breaker Plate Assembly
GK-151	2					Plain Steel Washer
IA-131	2					Breaker Arm Spring Clip
IG-2671	2					CONDENSER ASSEMBLY
IGE-14	1					Primary Connector Assy.
IGB-132	2					Terminal
IGE-15	1					#6 Plain Washer
IGE-1004	1					Breaker Plate Part Assembly
IB-23	1					Breaker Point Lock Nut
IGP-33†	1					Breaker Screw Point
IGE-1012	1					Breaker Sub Plate Assy.
IB-23	1					Breaker Point Lock Nut
IGP-33†	1					Breaker Screw Point
IGP-3028†	2					Breaker Arm Assembly
IGP-30	2					Breaker Arm Spring
X-194	4					#6 Lock Washer
EX-302	2					#6-32x1/4 Rd. Hd. Sc.
EX-321	2					#10-32x5/16 Rd. Hd. Sc.
EX-323	1					#6-32x5/16 Rd. Hd. Sc.
X-537	2					#10 Lock Washer
X-1012	2					#6 Lock Washer
EX-1546	3					#6-32x5/32 Fill. Hd. Sc.
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGE-2054R	1					Drive Shaft & Gov. Assy.
IG-817SS	1					Weight Spring Set
IG-1456	2					Weight Assembly
IGE-1054R	1					Drive Shaft Assembly
IGE-2056	1					Distributor Base Assy.
IG-326	2					Hinge Pin
IG-579A	2					Absorbent Bronze Brg.
IG-694	2					Dist. Cap Spring
X-480	1					1/4 Oiler-Press in Elbow
IGS-99	1					Washer
IGS-104	1					Thrust Washer
SW-213	1					Distributor Drive Rivet
EX-119	2					#10-32x1/2 Fill. Hd. Screw
X-196	4					#10 Lock Washer
EX-872	2					#10-32x1/4 Fill. Hd. Screw
		1	2	3	4	5

(Issued 7-9-40)

† Service BREAKER POINT SET IGP-3028BS.


UNIT	APPLICATION
IGE-4024	Nash

Printed in U. S. A.

File in
Equipment & Parts List Binder

“NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed.”

IGE-4024 DISTRIBUTOR ILLUSTRATION

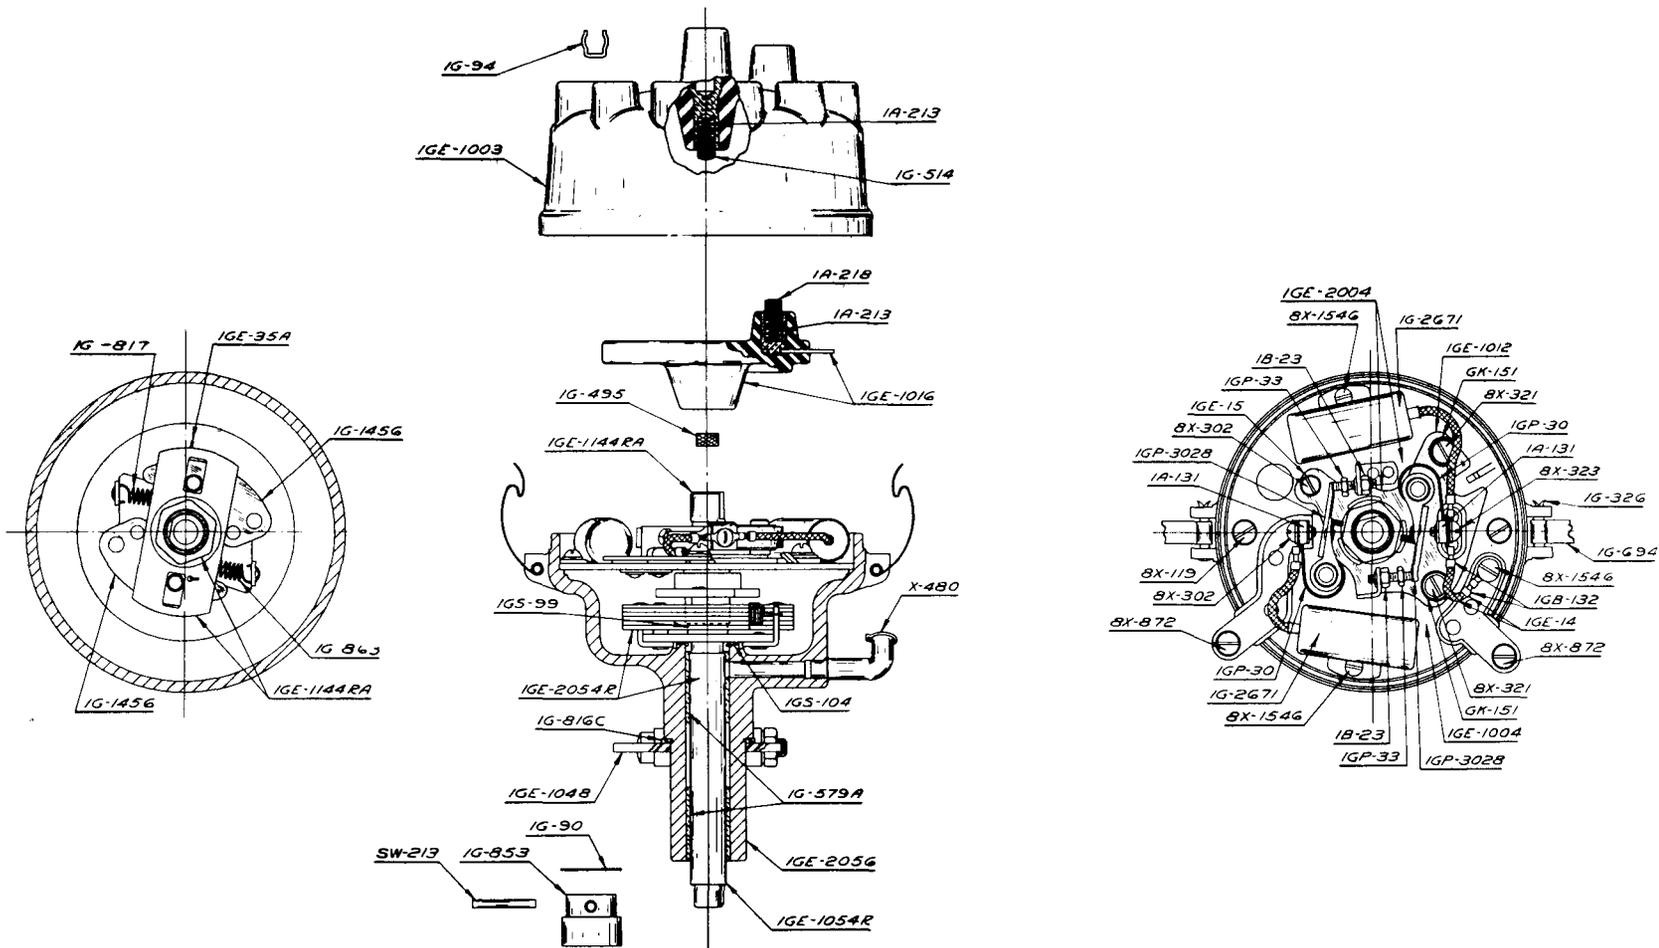

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4028,A,B,C DISTRIBUTOR PARTS LIST

IGE-4028,A,B,C

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	1 2 3 4 5 Washer, Thrust, Drive Shaft, Lower	8X-1546	3	1 2 3 4 5 Screw, Pri. Lead & Condenser Mtg., Fill. Hd. #6-32x5/32
IG-94	14	Terminal, H.T. Wire	*	1	Shaft & Gov. Assy.
IG-495	1	Wick, Felt, Cam Sleeve	*	1	Spring Set, Governor Weight
IG-644	1	Coupling, Drive, Dist.	IG-2456	2	Weight, Governor
IG-816	1	Washer, Thrust, Advance Arm	IGE-1020L	1	Shaft, Drive
IGC-2024N-1	1	Arm, Advance	IGE-2051	1	Base Assy., Dist.
IGE-36	1	Spring, Anti-Rattle, Gov.	IG-326	2	Pin, Hinge, Cap Spring
IGE-1003L	1	CAP ASSY., DIST.	IG-579A	2	Bearing, Absorbent Bronze
IG-514	1	Contact, Plunger	IG-694	2	Spring, Clamp, Cap
IG-515A	1	Spring, Contact	X-480	1	Oiler, Elbow, Press in, 1/4
IGE-1016	1	ROTOR ASSY.	IGS-99	1	Spacer, Cam
IA-218	1	Contact, Plunger	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IG-515A	1	Spring, Contact	SW-213	1	Rivet, Coupling, Drive Shaft
*	1	Cam & Stop Plate, 6 Cyl., L.H.	8X-119	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x1/2
IGE-2004	1	Plate Assy., Breaker	X-196	4	Lockwasher, Breaker Plate & Terminal Sc., #10
GK-151	2	Washer, Plain, Sub Plate Mtg., #10	8X-872	2	Screw, Terminal, Fill. Hd. #10-32x1/4
IA-131	2	Clip, Spring, Contact Arm			1 2 3 4 5
IB-23	2	Nut, Lock, Contact Screw			
IG-2671	2	CONDENSER			
IGE-15	1	Washer, Plain, Sub Plate, Mtg., #6			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub, Breaker			
IGP-3028BS	1	CONTACT SET, BREAKER			
IGS-89	1	Lead Assy.			
12X-194	4	Lockwasher, Condenser & Pri. Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd. Hd. #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd. #6-32x5/16			
12X-537	2	Lockwasher, Sub Plate Mtg., #10			
12X-1012	2	Lockwasher, Condenser Mtg., #6			
		1 2 3 4 5			

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Shaft & Gov.	Cam	Spring Set
IGE-4028	IGE-2020LG	IGE-1067LF	IG-636RS
IGE-4028A	IGE-2020LH	IGE-1067LG	IGC-78S
IGE-4028B	IGE-2020LJ	IGE-1067LJ	IGB-345SS
IGE-4028C	IGE-2020LK	IGE-1067LC	IGB-328GS

UNIT	APPLICATION
IGE-4028,A,B,C	Continental

(Issued 4-26-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4029 DISTRIBUTOR PARTS LIST

IGE-4029

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-94	14	Terminal, H.T. Wire	IGE-2063	1	Base Assy., Dist.
IG-313	1	Washer, Thrust, Lower	IG-326	2	Pin, Hinge, Cap Spring
IG-495	1	Wick, Felt, Cam Sleeve	IG-579A	2	Bearing, Absorbent Bronze
IGE-35	1	Spring, Anti-Rattle, Gov.	IG-694	2	Spring, Clamp, Cap
IGE-1003L	1	CAP ASSY., DIST.	IGE-69	1	Arm, Advance
IG-514	1	Contact, Plunger	X-61	4	Screw, Advance Arm, Flat Hd. #10-32x7/16
IG-515A	1	Spring, Contact			
IGE-1016	1	ROTOR ASSY.	X-480	1	Oiler, Elbow, Press in, 1/4
IA-218	1	Contact, Plunger	IGE-2064R	1	Shaft & Gov. Assy.
IG-515A	1	Spring, Contact	IG-1456	2	Weight, Governor
IGE-1067RD	1	Cam & Stop Plate, 6 Cyl., R.H.	IGB-343S	1	Spring Set, Gov. Weight
IGE-2004	1	Plate Assy., Breaker	IGE-1064R	1	Shaft, Drive
GK-151	2	Washer, Plain, Sub Plate Mtg., #10	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IA-131	2	Clip, Spring, Contact Arm	8X-119	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x1/2
IB-23	2	Nut, Lock, Contact Screw	X-196	4	Lockwasher, Breaker Plate & Terminal Sc., #10
IG-2671	2	CONDENSER	8X-872	2	Screw, Terminal, Fill. Hd. #10-32x1/4
IGE-15	1	Washer, Plain, Sub Plate Mtg., #6			1 2 3 4 5
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub, Breaker			
IGP-3028BS	1	CONTACT SET, BREAKER			
IGS-89	1	Lead Assy.			
12X-194	4	Lockwasher, Condenser & Pri. Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd. Hd. #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd. #6-32x5/16			
12X-537	2	Lockwasher, Sub Plate Mtg., #10			
12X-1012	2	Lockwasher, Condenser Mtg., #6			
8X-1546	3	Screw, Pri. Lead & Condenser Mtg., Fill. Hd. #6-32x5/32			
		1 2 3 4 5			

UNIT	APPLICATION
IGE-4029	Hall Scott

(Issued 4-26-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4032 DISTRIBUTOR PARTS LIST

IGE-4032
(Issued 10-9-50)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	2	Washer, Thrust, Drive Shaft, Lower	12X-537	2	Lockwasher, Sub Plate Mtg., #10
IG-94	14	Terminal, H.T. Wire	8X-1546	3	Screw, Pri. Lead & Condenser Mtg., Fill. Hd. #6-32x5/32
IG-816A	1	Washer, Thrust, Advance Arm	IGE-2066	1	Base Assy., Dist.
IGC-2024AU-3	1	Arm, Advance	IG-326	2	Pin, Hinge, Cap Spring
IGE-72	1	Wick, Felt	IG-579A	2	Bearing, Absorbent Bronze
IGE-1003	1	CAP ASSY., DIST.	IG-694	2	Spring, Clamp, Cap
IG-514	1	Contact, Plunger	8X-119	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x1/2
IG-515A	1	Spring, Contact	X-196	4	Lockwasher, Breaker Plate & Terminal Screw, #10
IGE-1016	1	ROTOR ASSEMBLY	X-490A	1	Oiler
IA-218	1	Contact, Plunger	8X-872	2	Screw, Terminal, Fill. Hd., #10-32x1/4
IG-515A	1	Spring, Contact			
IGE-1068RA	1	Shaft & Cam, 6 Cyl. R.H.			
IGE-2004	1	Plate Assy., Breaker			
GK-151	2	Washer, Plain, Sub Plate Mtg., #10			
IA-131	2	Clip, Spring, Contact Arm			
IB-23	2	Nut, Lock, Contact Screw			
IG-2671	2	CONDENSER			
IGE-15	1	Washer, Plain, Sub Plate Mtg., #6			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub, Breaker			
IGP-3028BS	1	CONTACT SET, BREAKER			
IGS-89	1	Lead Assy.			
12X-194	6	Lockwasher, Condenser Mtg. & Pri. Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd. Hd., #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd. #6-32x5/16			

UNIT	APPLICATION
IGE-4032	Buda

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4103 DISTRIBUTOR PARTS LIST

IGE-4103

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Drive Shaft, Upper	IGE-2070	1	Base Assy., Dist.
IAO-11	1	Washer, Thrust, Drive Shaft, Upper	IG-326	2	Pin, Hinge, Cap Spring
IG-94	14	Terminal, H.T. Wire	IG-579A	2	Bearing, Abs. Bronze
IG-313	1	Washer, Thrust, Lower	IG-694	2	Spring, Clamp, Cap
IG-495	1	Wick, Felt, Cam Sleeve	IGE-69	1	Arm, Advance
IG-913AS	1	Spring, Set, Gov. Weight	IGE-71	1	Gasket
IGC-117	1	Cover, Terminal Slot	IGS-117	1	Oil Wick
IGC-2168R	2	Weight, Governor	X-61	4	Screw, Attaching, Advance Arm Flat Hd., #10-32x7/16
IGE-1460	1	Cam & Stop Plate, 6 Cyl., R.H.	X-480	1	Oiler, Elbow, Press in, 1/4
IGE-35	1	Spring, Anti-Rattle, Gov.	IGS-34	1	Cover, Terminal Slot
IGE-1003LA	1	Cap Assy., Dist.	IGS-99	1	Spacer, Cam
IG-514	1	Contact, Plunger	8X-119	2	Screw, Breaker Plate, Fill. Hd. #10-32x1/2
IG-515A	1	Spring, Contact	12X-196	4	Lockwasher, Breaker Plate & Terminal Screw, #10
IGE-1016	1	Rotor Assy.	8X-872	2	Screw, Terminal, Fill. Hd. #10-32x1/4
IA-218	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGE-1064RA	1	Shaft, Drive			
IGE-2004A	1	Plate Assy., Breaker			
GK-151	2	Washer, Plain, Sub Plate Mtg., #10			
IA-131	2	Clip, Spring, Contact Arm			
IB-23	2	Nut, Lock, Contact Screw			
IG-3927C	2	Condenser			
IGE-15	1	Washer, Plain, Sub Plate Mtg., #6			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate Breaker, Sub			
IGP-3028BS	1	Contact Set, Breaker			
IGS-89	1	Lead Assy.			
12X-194	6	Lockwasher, Condenser Mtg. & Pri. Lead #6			
8X-302	2	Screw, Cond. Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd. Hd. #10-32x5/16			
8X-323	1	Screw, Pri., & Cond. Leads, Rd. Hd., #6-32x5/16			
12X-537	2	Lockwasher, Sub Plate Mtg. #10			
8X-1546	3	Screw, Pri. Lead & Cond. Mtg., Fill. Hd. #6-32x5/32			

UNIT	APPLICATION
IGE-4103	Hall Scott

(Issued 10-21-49)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4104 DISTRIBUTOR PARTS LIST

IGE-4104
(Issued 4-4-51)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	Washer, Thrust, Drive Shaft, Lower	IGE-2043	1	Base Assy., Dist.
IG-94	14	Terminal, H.T. Wire	IG-326	2	Pin, Hinge, Cap Spring
IG-495	1	Wick, Felt, Cam Sleeve	IG-579A	2	Bearing, Abs. Bronze
IGB-264	3	Plug, Rubber, Vent. Hole	IG-694	2	Spring, Clamp, Cap
IGC-2155	1	Arm, Advance	IGP-41	2	Cover, Terminal Slot
IGC-2168R	2	Weight, Governor	IGS-99	1	Spacer, Cam
IGE-24S	1	Spring Set, Gov. Weight	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IGE-35	1	Spring, Anti-Rattle, Gov.	IGT-117	1	Wick, Felt
IGE-1003	1	CAP ASSY., DIST.	8X-119	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x1/2
IG-514	1	Contact, Plunger	12X-196	4	Lockwasher, Breaker Plate & Terminal Screw, #10
IG-515A	1	Spring, Contact	X-480	1	Oiler
IGE-1016	1	ROTOR ASSY.	8X-872	2	Screw, Terminal, Fill. Hd. #10-32x1/4
IA-218	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGE-1042RA	1	Shaft, Drive			
IGE-1067R	1	Cam & Stop Plate, 6 Cyl., R.H.			
IGE-2004	1	Plate Assy., Breaker			
GK-151	2	Washer, Plain, Sub Plate Mtg., #10			
IA-131	2	Clip, Spring, Contact Arm			
IAT-14	1	Lead Assy.			
IB-23	2	Nut, Lock, Contact Screw			
IG-2671	2	CONDENSER			
IGE-15	1	Washer, Plain, Sub Plate Mtg., #6			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub, Breaker			
IGP-3028BS	1	CONTACT SET, BREAKER			
12X-194	6	Lockwasher, Condenser Mtg. & Condenser & Pri. Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg. Rd. Hd. #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd. #6-32x5/16			
12X-537	2	Lockwasher, Sub Plate Mtg., #10			
8X-1546	3	Screw, Pri. Lead & Condenser Mtg., Fill. Hd. #6-32x5/32			

UNIT	APPLICATION
IGE-4104	Oshkosh (Truck)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGE-4106 DISTRIBUTOR PARTS LIST

IGE-4106
(Issued 4-21-52)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IAO-10	1	Washer, Thrust, Inner Drive Shaft, Upper	12X-537	2	Lockwasher, Sub Plate Mtg., #10
IAO-11	1	Washer, Thrust, Outer, Drive Shaft, Upper	8X-1546	3	Screw, Pri. Lead & Condenser Mtg., Fill. Hd. #6-32x5/32
IG-90	1	Washer, Thrust, Drive Shaft, Lower	IGE-2043A	1	Base Assy., Dist.
IG-94	14	Terminal, H. T. Wire	IG-326	2	Pin, Hinge, Cap Spring
IG-495	1	Wick, Felt, Cam Sleeve	IG-579A	2	Bearing, Abs. Bronze
IGB-264	3	Plug, Rubber, Vent. Hole	IG-694	2	Spring, Clamp, Cap
IGC-2155	1	Arm, Advance	IGP-41	2	Cover, Terminal Slot
IGC-2168R	2	Weight, Governor	IGS-99	1	Spacer, Cam
IGE-24S	1	SPRING SET, GOV. WEIGHT	IGT-117	1	Wick, Felt
IGE-35	1	Spring, Anti-Rattle	8X-119	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x1/2
IGE-1003A	1	CAP ASSY., DIST.	12X-196	4	Lockwasher, Breaker Plate & Terminal Screw, #10
IG-514	1	Contact, Plunger	X-480	1	Oiler
IG-515A	1	Spring, Contact	8X-872	2	Screw, Terminal, Fill. Hd. #10-32x1/4
IGE-1016	1	ROTOR ASSY.			
IA-218	1	Contact, Plunger			
IG-515A	1	Spring, Contact			
IGE-1042RA	1	Shaft, Drive			
IGE-1067R	1	Cam & Stop Plate, 6 Cyl. R.H.			
IGE-2004	1	Plate Assy., Breaker			
GK-151	2	Washer, Plain, Sub Plate Mtg., #10			
IA-131	2	Clip, Spring, Contact Arm			
IAT-14	1	Lead Assy., Ground			
IB-23	2	Nut, Lock, Contact Screw			
IG-2671	2	CONDENSER			
IGE-15	1	Washer, Plain, Sub Plate Mtg., #3			
IGE-1004S	1	Plate, Breaker, Partial			
IGE-1012S	1	Plate, Sub. Breaker			
IGP-3028BS	1	CONTACT SET, BREAKER			
12X-194	6	Lockwasher, Cond. Mtg., & Cond. & Pri. Lead, #6			
8X-302	2	Screw, Condenser Lead & Sub Plate Mtg., Rd. Hd. #6-32x1/4			
8X-321	2	Screw, Sub Plate Mtg., Rd Hd. #10-32x5/16			
8X-323	1	Screw, Primary & Condenser Leads, Rd. Hd. #6-32x5/16			

UNIT	APPLICATION
IGE-4106	Oshkosh

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGH-4015A. DISTRIBUTOR PARTS LIST
B,C

IGH-4015A,
B,C

Part No.	No Used	Name of Part					Part No.	No. Used	Name of Part											
		1	2	3	4	5			1	2	3	4	5							
GE-12	1						X-195	2												
IG-90	1						8X-302	1												
IG-94	9						8X-305	2												
IG-680	1						8X-312	1												
IG-1325	1						8X-350	2												
IG-514	1						X-537	1												
IG-515	1						8X-908	2												
IG-1576	1						X-1012	3												
IGB-162	1						IGK-26	1												
*	1						X-196	4												
IGB-1025C	1						8X-870	2												
IGH-28	1						8X-872	2												
*	1						8X-888	1												
*	1						X-1276	2												
*	2																			
IG-1456	2																			
IGH-1026R	1																			
IGH-2027	1																			
IG-352	2																			
IG-511	1																			
IG-579A	2																			
IG-694	2																			
X-374	2																			
X-490	1																			
IGH-2831	1																			
QK-151	1																			
IA-131	2																			
IG-841	1																			
IGB-132	2																			
IG-1831	1																			
IG-1832	1																			
IB-23	1																			
IGP-33	1																			
IG-1839	1																			
IGP-3028	2																			
IGP-30	2																			
		1	2	3	4	5														

(Issued 10-22-36)

Assembly No.	Drive Rivet	Cam & Stop Plate	Dr. Shaft & Gov.	Weight Spring	Weight Sp. Set
IGH-4015A	IGB-247	IGH-1011RA	IGH-2026R	IG-884	IG-884S
IGH-4015B	IGB-247	IGH-1011R	IGH-2026RA	IGE-24	IGE-24S
IGH-4015C	IG-86	IGH-1011R	IGH-2026R-1	IG-884	IG-884S


* See table following parts list for part number applying to assembly wanted.

NOTE:- Use IGC-3028S breaker point set and * weight spring set in servicing this unit.

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

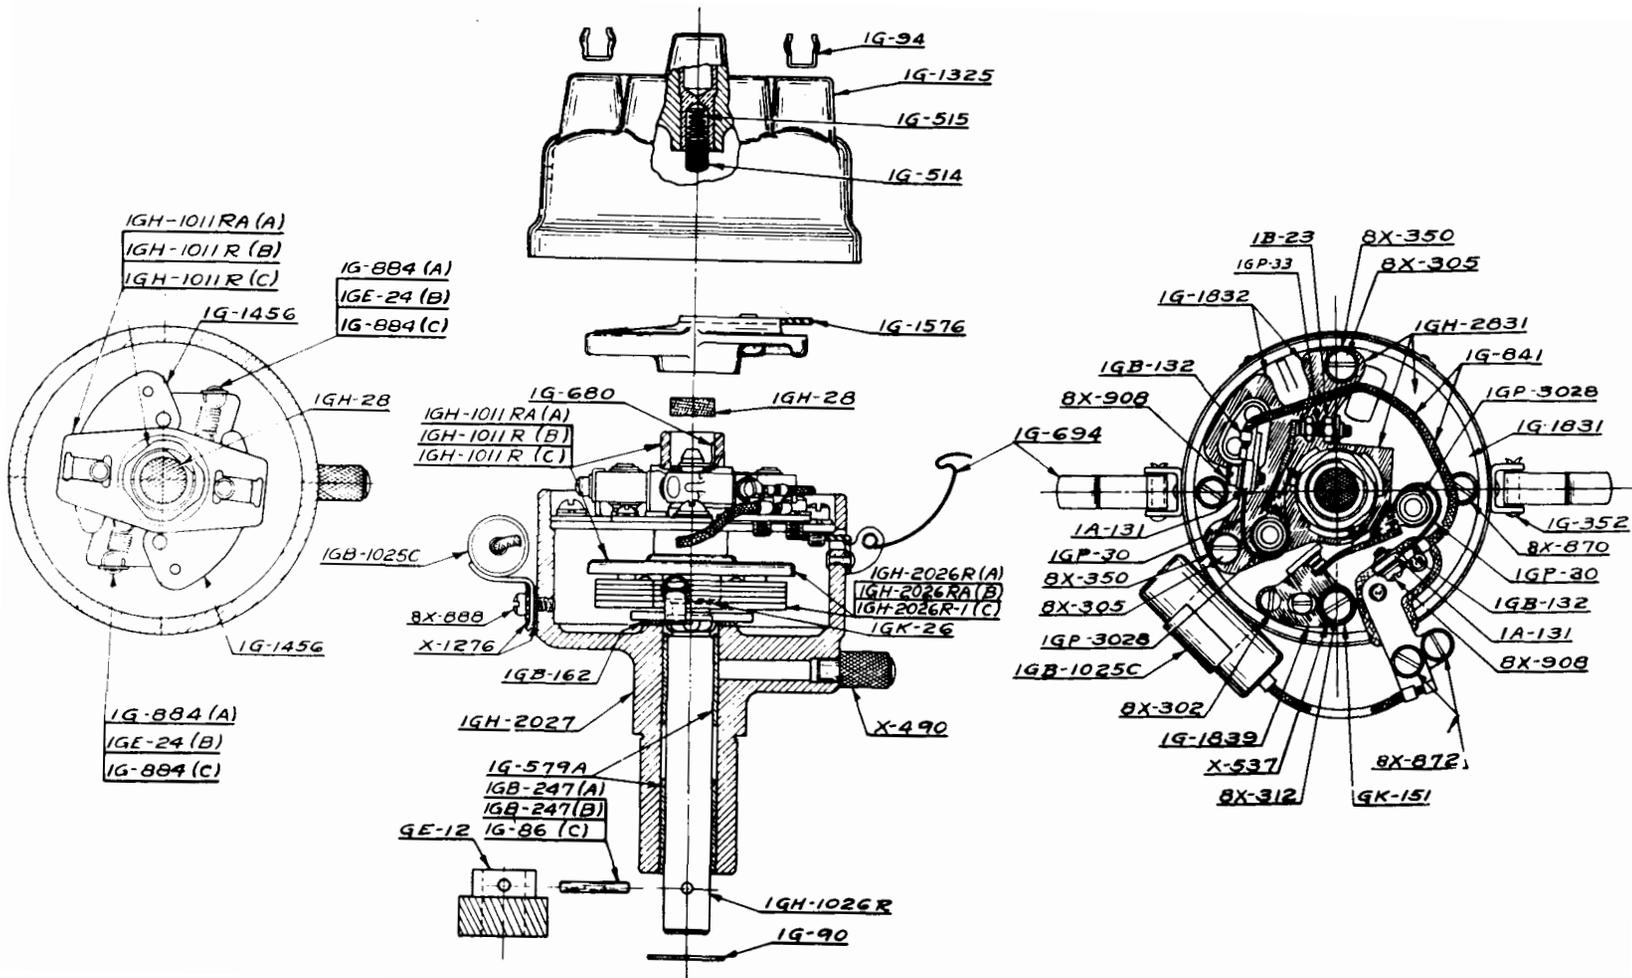

IGH-4015A-B-C DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGH-4016 DISTRIBUTOR PARTS LIST

IGH-4016

PRELIMINARY

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	1	Thrust Washer				
IG-94	9	H. T. Wire Terminal				
IG-680	1	Lock Spring Ring				
IG-816A	1	Thrust Washer				
IG-1325	1	DISTRIBUTOR CAP ASSEMBLY				
IG-514	1	Contact Spring Plunger				
IG-515	1	Contact Spring				
IG-1576	1	ROTOR				
IGB-162	1	Thrust Washer				
IGC-1025C	1	CONDENSER ASSEMBLY				
IGC-1024L-5	1	Advance Control Arm				
IGH-28	1	Cam Sleeve Felt Wick				
IGH-1011LA	1	Cam & Stop Plate - 8 Cyl. 4 L.H.				
IGH-2037	1	Distributor Base Assembly				
IG-511	1	Name Plate				
IG-579A	2	Absorbent Bronze Brg.				
IG-694	2	Dist. Cap Spring				
X-490	1	Press In-Sleeve Oiler				
X-1201	2	.10x1/4 Tubular Rivet				
X-1448	2	Hinge Pin				
IGH-2038L	1	Drive Shaft & Gov. Assy.				
IG-884S	1	Weight Spring Set				
IG-2456	2	Weight Assembly				
IGH-1038L	1	Drive Shaft Assembly				
IGH-2831	1	Breaker Plate Assembly				
GK-151	1	Plain Steel Washer				
IA-131	2	Breaker Arm Spring Clip				
IG-841	1	Primary Connector Assy.				
IGB-132	2	Terminal				
IG-1831	1	Breaker Plate Part Assy.				
IG-1832	1	Breaker Sub Plate Assy.				
IB-23	1	Breaker Point Lock Nut				
IGP-33†	1	Breaker Screw Point				
IG-1839†	1	Breaker Point				
IGP-3028†	2	Breaker Arm Assembly				
IGP-30	2	Breaker Arm Spring				
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
X-195	2	#8 Lock Washer				
8X-302	1	#6-32x1/4 Rd. Hd. Screw				
8X-305	2	#8-32x1/4 Rd. Hd. Screw				
8X-312	1	#10-32x1/4 Rd. Hd. Screw				
8X-350	2	#8 Plain Washer				
X-537	1	#10 Lock Washer				
8X-908	2	#6-32x1/4 Fill. Hd. Screw				
X-1012	3	#6 Lock Washer				
IGK-26	1	Washer - .020" Thick				
X-196	4	#10 Lock Washer				
8X-870	2	#10-32x5/16 Fill. Hd. Screw				
8X-872	2	#10-32x1/4 Fill. Hd. Screw				
8X-888	1	#8-32x5/16 Fill. Hd. Screw				
X-1276	2	#8 Skpf. Washer				
		1	2	3	4	5

(Issued 7-3-41)

† SERVICE CONTACT SET IGC-3028S.

UNIT	APPLICATION
IGH-4016	Climax

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGH-4019A,B,C,D DISTRIBUTOR PARTS LIST

IGH-4019A,B,C,D

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GJ-306	1	Distributor Drive Rivet	IG-1839†	1	Breaker Point
*	1	DIST. GEAR - FOLLOWER	IGP-3028†	2	Breaker Arm Assembly
IG-90	1	Thrust Washer	IGP-30	2	Breaker Arm Spring
IG-94	9	H. T. Wire Terminal	X-195	2	#8 Lock Washer
IG-680	1	Insulating Bushing	8X-302	1	#8-32x1/4 Rd. Hd. Screw
IG-1325	1	DISTRIBUTOR CAP ASSEMBLY	8X-305	2	#8-32x1/4 Rd. Hd. Screw
IG-514	1	Contact Spring Plunger	8X-312	1	#10-32x1/4 Rd. Hd. Screw
IG-515	1	Contact Spring	8X-350	2	#8 Plain Washer
IG-1576	1	ROTOR	X-537	1	#10 Lock Washer
IGB-162	1	Thrust Washer	8X-908	2	#8-32x1/4 Fill. Hd. Sc.
IGB-1025C	1	CONDENSER ASSEMBLY	X-1012	3	#6 Lock Washer
IGH-28	1	Cam Sleeve Felt Wick	IGK-26	1	Washer - .020" Thick
*	1	Cam & Stop Plate - 8 Cyl. 4 - L.H.	X-196	4	#10 Lock Washer
*	1	Drive Shaft & Gov. Assembly	8X-870	2	#10-32x5/16 Fill. Hd. Sc.
IG-2456	2	Weight Assembly	8X-872	2	#10-32x1/4 Fill. Hd. Sc.
*	1	Weight Spring Set	8X-888	1	#8-32x5/8 Fill. Hd. Screw
IGH-1042L	1	Drive Shaft Assembly	X-1276	2	#8 Skpf. Washer
IGH-2043	1	Distributor Base Assembly			1 2 3 4 5
IG-511	1	Name Plate			
IG-579A	2	Absorbent Bronze Brg.			(Issued 7-30-40)
IG-694	2	Dist. Cap Spring			
X-490	1	Press in - Sleeve Oiler			
X-1201	2	.10x1/4 Tubular Rivet			
X-1448	2	Hinge Pin			
IGH-2831	1	Breaker Plate Assembly			
GK-151	1	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-841	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IG-1831	1	Breaker Plate Part Assy.			
IG-1832	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
		1 2 3 4 5			

† SERVICE BREAKER POINT SET IGC-3028S.

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Gear - Follower	Cam Assembly	Dr. Shaft & Gov.	Spring Set
IGH-4019A	IB-168	IGH-1011L	IGH-2042L	IGB-178S
IGH-4019B	IB-168	IGH-1011LB	IGH-2042LA	IGC-78S
IGH-4019C	GAF-72	IGH-1011LB	IGH-2042LA	IGC-78S
IGH-4019D	GAF-73	IGH-1011LB	IGH-2042LA	IGC-78S


UNIT	APPLICATION
IGH-4019A,B,C,D	Universal

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGH-4019A,B,C,D DISTRIBUTOR ILLUSTRATION

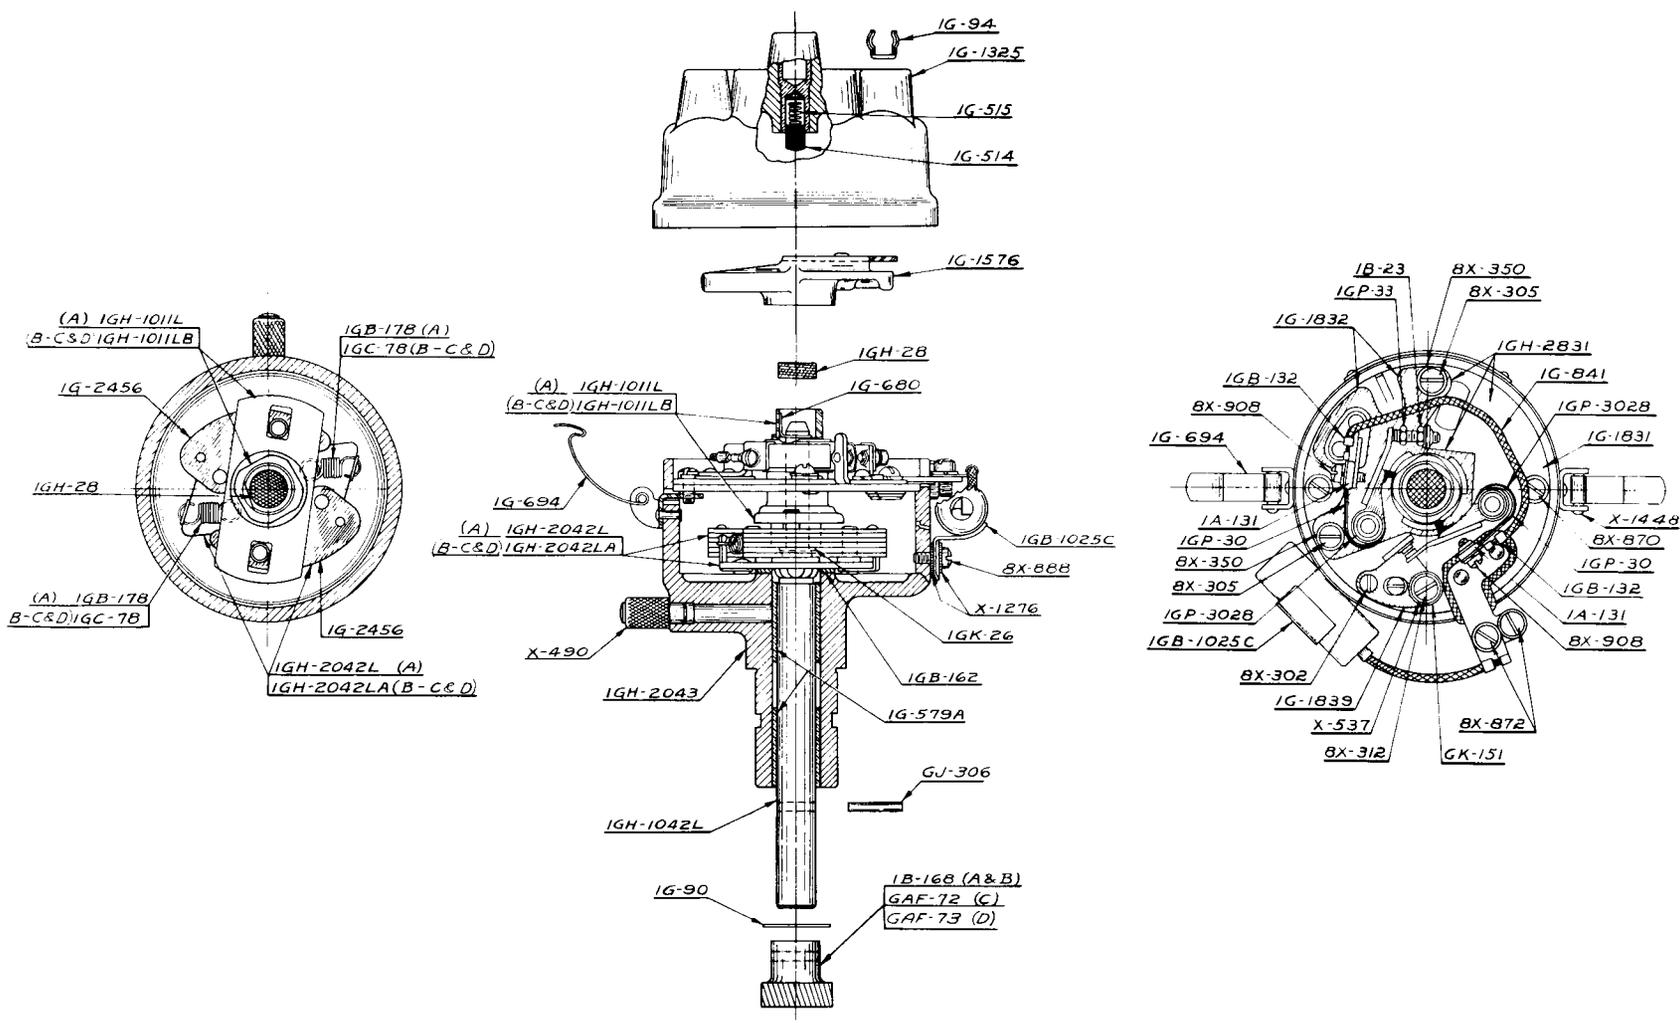

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGH-4026,A DISTRIBUTOR PARTS LIST

IGH-4026,A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IG-1839†	1	Breaker Point
IG-94	9	H. T. Wire Terminal	IGP-3028†	2	Breaker Arm Assembly
IG-680	1	Insulating Bushing	IGP-30	2	Breaker Arm Spring
IGB-162	1	Thrust Washer	X-195	2	#8 Lock Washer
IGB-1025C	1	CONDENSER ASSEMBLY	8X-302	1	#6-32x1/4 Rd. Hd. Screw
IGH-28	1	Cam Sleeve Felt Wick	8X-305	2	#8-32x1/4 Rd. Hd. Screw
IGH-53	1	Drive Shaft Extension	8X-312	1	#10-32x1/4 Rd. Hd. Screw
IGH-54	1	Distributor Drive Sleeve	8X-350	2	#8 Plain Washer
IGH-55	1	Drive Shaft Pin	X-537	1	#10 Lock Washer
IGH-1011LE	1	Cam & Stop Plate - 8 Cyl. 4 L.H.	8X-908	2	#6-32x1/4 Fill. Hd. Sc.
			X-1012	3	#6 Lock Washer
IGH-1060	1	Advance Control Arm	IGK-26	1	Washer - .020" Thick
IGH-2051	1	Distributor Base Assembly	IGP-1003	1	DISTRIBUTOR CAP ASSEMBLY
IG-511	1	Name Plate	IG-514	1	Contact Spring Plunger
IG-579A	2	Absorbent Bronze Brg.	IG-515	1	Contact Spring
IG-694	2	Dist. Cap Spring	IGP-1016	1	ROTOR
X-380	1	1/8 Grease Cup	SW-213	1	Distributor Drive Rivet
X-1201	2	.10x1/4 Tubular Rivet	X-196	4	#10 Lock Washer
X-1448	2	Hinge Pin	8X-870	2	#10-32x5/16 Fill. Hd. Sc.
*	1	Drive Shaft & Gov. Assy.	8X-872	2	#10-32x1/4 Fill. Hd. Sc.
IG-2456	2	Weight Assembly	8X-888	1	#8-32x5/8 Fill. Hd. Screw
*	1	Weight Spring Set	X-1276	2	#8 Skpf. Washer
*	1	Drive Shaft Assembly			1 2 3 4 5
IGH-2831	1	Breaker Plate Assembly			
GK-151	1	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			(Issued 7-30-40)
IG-841	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IG-1831	1	Breaker Plate Part Assy.			
IG-1832	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
		1 2 3 4 5			

† SERVICE BREAKER POINT SET IGC-3028S.

* See table following parts list for part number applying to assembly wanted.


Assembly No.	Dr. Shaft & Gov.	Spring Set	Drive Shaft
IGH-4026	IGH-2052L	IGC-81SS	IGH-1052L
IGH-4026A	IGH-2052LA	IGB-277S	IGH-1052LA

UNIT	APPLICATION
IGH-4026,A	Packard

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

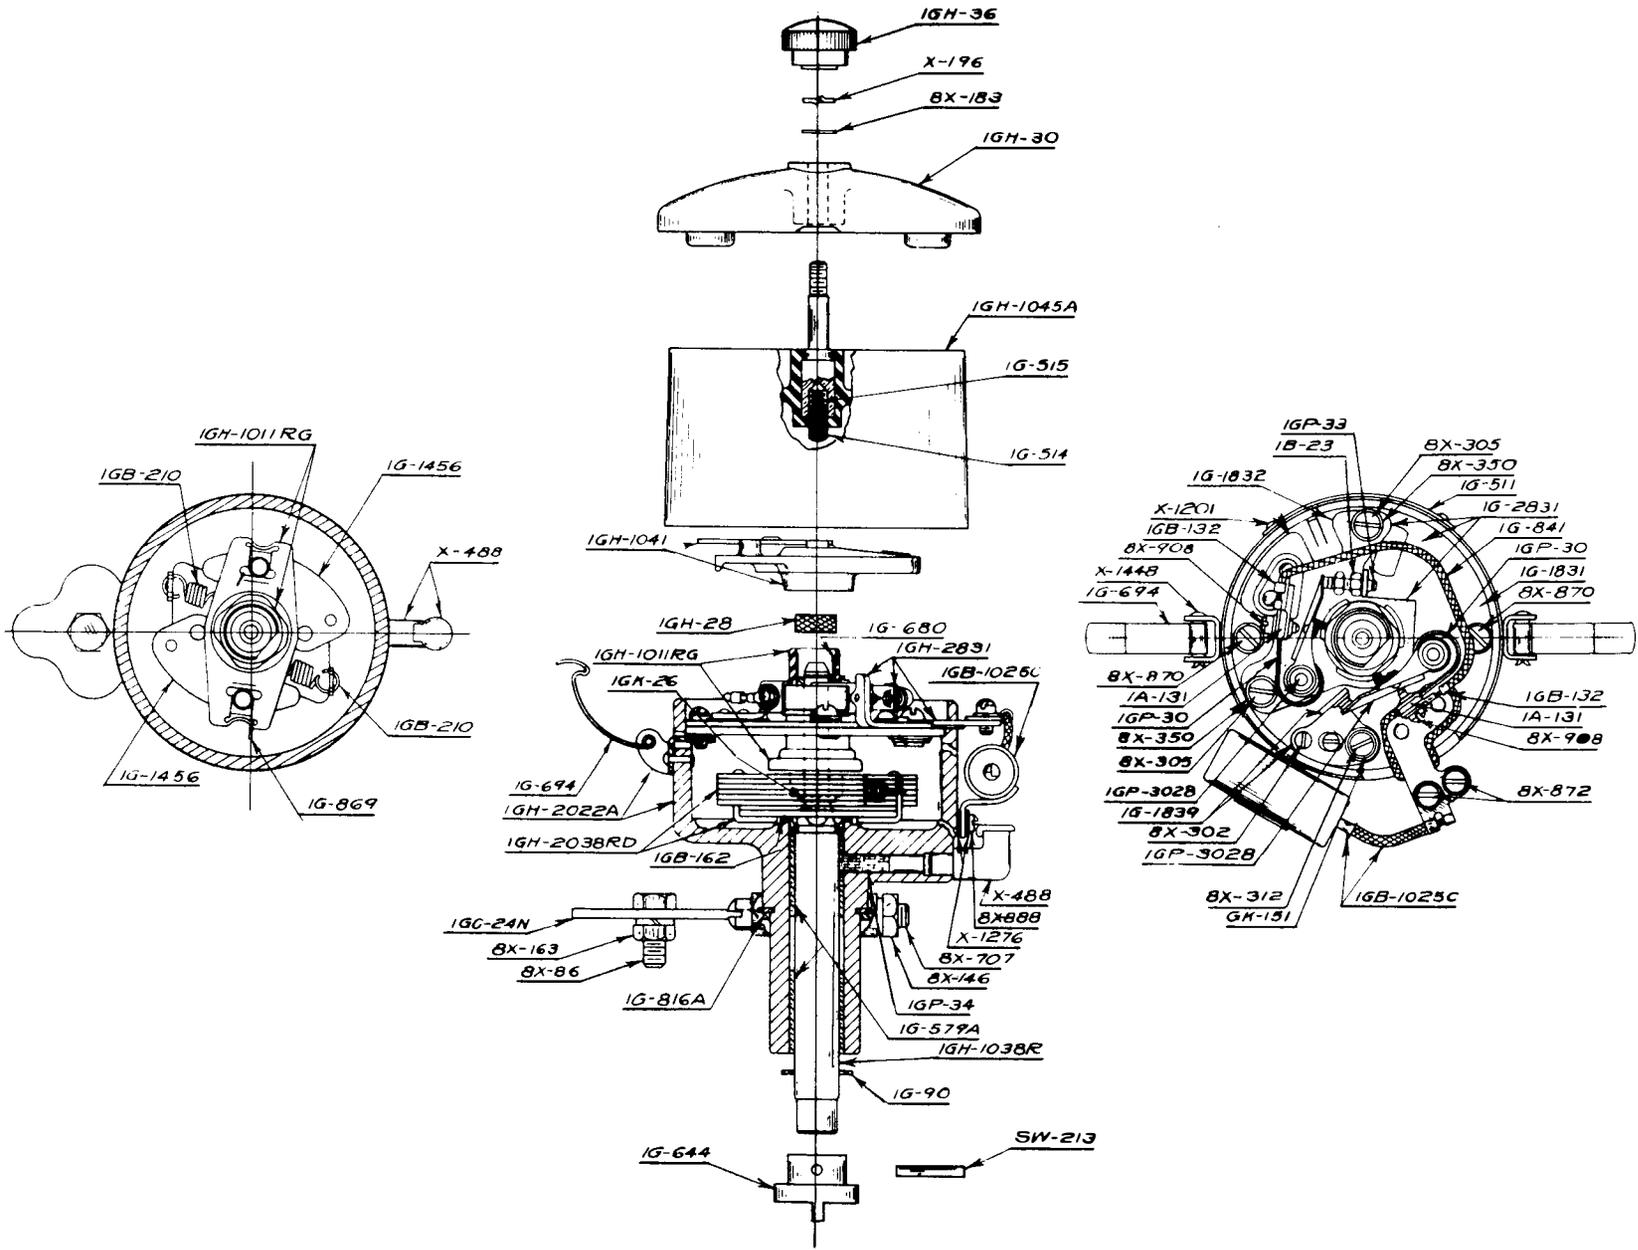

IGH-4028 DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGH-4029 DISTRIBUTOR PARTS LIST

IGH-4029

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	X-195	2	#8 Lock Washer
IG-680	1	Lock Spring Ring	8X-302	1	#6-32x1/4 Rd. Hd. Sc.
IGB-1025C	1	CONDENSER ASSEMBLY	8X-305	2	#8-32x1/4 Rd. Hd. Sc.
IGE-35	1	Governor Control Spring	8X-312	1	#10-32x1/4 Rd. Hd. Sc.
IGH-28	1	Cam Sleeve Felt Wick	8X-350	2	#8 Plain Washer
IGH-30	1	DISTRIBUTOR CAP COVER	X-537	1	#10 Lock Washer
IGH-36	1	Distributor Cap Nut	8X-908	2	#6-32x1/4 Fill. Hd. Sc.
IGH-68	1	Dist. Drive Coupling	X-1012	3	#6 Lock Washer
IGH-1011RJ	1	Cam & Stop Plate - 8 cyl. 4 R.H.	IGS-99	1	Washer
IGH-1029	1	DISTRIBUTOR CAP ASSY.	IGS-104	1	Thrust Washer
IG-514	1	Contact Spring Plunger	SW-213	1	Distributor Drive Rivet
IG-515	1	Contact Spring	8X-183	1	#10 Brass Washer
IGH-1041	1	ROTOR	X-196	5	#10 Lock Washer
IGH-2067	1	Distributor Base Assy.	8X-870	2	#10-32x5/16 Fill. Hd. Sc.
IG-511	1	Name Plate	8X-872	2	#10-32x1/4 Fill. Hd. Sc.
IG-579A	2	Absorbent Bronze Brg.	8X-888	1	#8-32x5/16 Fill. Hd. Sc.
IG-694	2	Dist. Cap Spring	X-1276	2	#8 Skpf. Washer
X-382	1	1/8 Grease Cup			1 2 3 4 5
X-1201	2	.10x1/4 Tubular Rivet			(Issued 6-25-40)
X-1448	2	Hinge Pin			
IGH-2069R	1	Drive Shaft & Gov. Assy.			
IG-1456	2	Weight Assembly			
IGB-284S	1	Weight Spring Set			
IGH-1069R	1	Drive Shaft Assy.			
IGH-2831	1	Breaker Plate Assembly			
GK-151	1	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-841	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IG-1831	1	Breaker Plate Part Assy.			
IG-1832	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
IG-1839†	1	Breaker Point			
IGP-3028†	2	Breaker Arm Assembly			
IGP-30	2	Breaker Arm Spring			
		1 2 3 4 5			

† Service BREAKER POINT SET IGC-3028S.

UNIT	APPLICATION
IGH-4029	Studebaker

Printed in U. S. A.

File in
Equipment & Parts List Binder

“NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed.”

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGH-4030A,B DISTRIBUTOR PARTS LIST

IGH-4030A,B

PRELIMINARY

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGS-99	1	Washer
IG-94	9	H. T. Wire Terminal	IGS-104	1	Thrust Washer
* IG-680	1	DIST. GEAR - Follower	SW-213	1	Distributor Drive Rivet
IG-816C	1	Lock Spring Ring	X-196	4	#10 Lock Washer
IG-1325	1	Thrust Washer	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IG-514	1	DISTRIBUTOR CAP ASSEMBLY	8X-872	2	#10-32x1/4 Fill. Hd. Screw
IG-515	1	Contact Spring Plunger	8X-888	1	#8-32x5/16 Fill. Hd. Screw
IG-1576	1	Contact Spring	X-1276	2	#8 Skpf. Washer
IG-2860A-1	1	ROTOR			1 2 3 4 5
IGB-1025C	1	Advance Arm Assembly			
IGH-28	1	CONDENSER			
IGH-1011LB	1	Cam Sleeve Felt Wick			(Issued 1-16-42)
		Cam & Stop Plate-8 Cyl.			
		4 L.H.			
IGH-2022	1	Distributor Base Assembly			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-490	1	Press In- Sleeve Oiler			
X-1448	2	Hinge Pin			
IGH-2070L	1	Drive Shaft & Gov. Assy.			
IG-2456	2	Weight Assembly			
IGC-78S	1	Weight Spring Set			
IGH-1070L	1	Drive Shaft Assembly			
IGH-2831	1	Breaker Plate Assembly			
GK-151	1	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-841	1	Breaker Point Lock Nut			
IGB-132	1	Breaker Screw Point			
IG-1831	1	Primary Connector Assy.			
IG-1832	1	Terminal			
IB-23	1	Breaker Plate Part Assy.			
IGP-33†	1	Breaker Sub-Plate Assy.			
IG-1839†	1	Breaker Point			
IGP-3028†	2	Breaker Point Lock Nut			
IGP-30	2	Breaker Screw Point			
X-195	2	Breaker Arm Assembly			
8X-302	1	Breaker Arm Spring			
8X-305	2	#8 Lock Washer			
8X-312	1	#6-32x1/4 Rd. Hd. Screw			
8X-350	2	#8-32x1/4 Rd. Hd. Screw			
X-537	1	#10-32x1/4 Rd. Hd. Screw			
8X-908	2	#3 Plain Washer			
X-1012	3	#10 Lock Washer			
		#6 Lock Washer			
		1 2 3 4 5			

* See table following parts list for part number applying to assembly wanted.

† SERVICE CONTACT SET IGC-3028S.

Assembly No.	Gear
IGH-4030A	IG-261
IGH-4030B	GK-36

UNIT	APPLICATION
IGH-4030A,B	Universal

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGH-4101 DISTRIBUTOR PARTS LIST

IGH-4101

PRELIMINARY

Part No.	No. Used	Name of Part					
			1	2	3	4	5
IG-90	1	Thrust Washer					
IG-680	1	Lock Spring Ring					
IGE-35	1	Anti-Rattle Spring					
IGH-28	1	Cam Sleeve Felt Wick					
IGH-30	1	DISTRIBUTOR CAP COVER					
IGH-36	1	Distributor Cap Nut					
IGH-68	1	Dist. Drive Coupling					
IGH-1011RJ	1	Cam & Stop Plate - 8 Cyl. 4 R.H.					
IGH-1029	1	DISTRIBUTOR CAP ASSEMBLY					
IG-514	1	Contact Spring Plunger					
IG-515	1	Contact Spring					
IGH-1041	1	ROTOR					
IGH-2069R	1	Drive Shaft & Gov. Assy.					
IG-1456	2	Weight Assembly					
IGB-284S	1	Weight Spring Set					
IGH-1069R	1	Drive Shaft Assembly					
IGH-2071	1	Breaker Plate Assembly					
GK-151	1	Plain Steel Washer					
IA-131	2	Breaker Arm Spring Clip					
IG-1839†	1	Breaker Point					
IGH-73	1	Lead Assembly					
IGB-132	2	Terminal					
IGH-1071	1	Breaker Plate Part Assy.					
IGH-1072	1	Breaker Sub Plate Assy.					
IB-23	1	Breaker Point Lock Nut					
IGP-33†	1	Breaker Screw Point					
IGH-3076	1	CONDENSER ASSEMBLY					
IGP-3028†	2	Breaker Arm Assembly					
IGP-30	2	Breaker Arm Spring					
X-195	2	#8 Lock Washer					
8X-302	1	#6-32x1/4 Rd. Hd. Screw					
8X-305	2	#8-32x1/4 Rd. Hd. Screw					
8X-312	1	#10-32x1/4 Rd. Hd. Screw					
8X-350	2	#8 Plain Washer					
X-537	1	#10 Lock Washer					
8X-908	2	#6-32x1/4 Fill. Hd. Sc.					
X-1012	3	#6 Lock Washer					
			1	2	3	4	5

Part No.	No. Used	Name of Part					
			1	2	3	4	5
IGH-2075	1	Distributor Base Assembly					
IG-579A	2	Absorbent Bronze Brg.					
IG-694	2	Dist. Cap Spring					
X-382	1	Grease Cup					
X-1448	2	Hinge Pin					
IGS-99	1	Washer					
IGS-104	1	Thrust Washer					
SW-213	1	Distributor Drive Rivet					
8X-183A	1	#10 Plain Washer					
X-196	4	#10 Lock Washer					
8X-870	2	#10-32x5/16 Fill. Hd. Sc.					
8X-872	1	#10-32x1/4 Fill. Hd. Sc.					
X-1012	1	#6 Skpf. Washer					
8X-1546	1	#6-32x5/32 Fill. Hd. Sc.					
			1	2	3	4	5

(Issued 8-13-41)

† SERVICE CONTACT SET IGC-3028S.

UNIT	APPLICATION
IGH-4101	• Studebaker

“NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGK-4101, DISTRIBUTOR PARTS LIST
A,B

IGK-4101,
A,B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GK-151	2	Plain Steel Washer	X-194	4	#6 Lock Washer
IG-90	1	Thrust Washer	8X-302	2	#6-32x1/4 Rd. Hd. Screw
IG-94	18	H.T. Wire Terminal	8X-321	2	#10-32x5/16 Rd. Hd. Screw
IG-495	1	Cam Sleeve Felt Wick	8X-323	1	#6-32x5/16 Rd. Hd. Screw
IG-816	1	Thrust Washer	X-537	2	#10 Lock Washer
IG-853	1	Dist. Drive Sleeve	8X-873	3	#6-32x3/16 Fill. Hd. Screw
IGB-162	1	Thrust Washer	X-1012	2	#6 Lock Washer
IGE-35	2	Governor Control Spring	*	1	Drive Shaft & Gov. Assy.
IGE-1031	1	Hold Down Arm Assy.	*	2	Weight Spring
8X-146	1	1/4-20 Hex. Nut	IG-1456	2	Weight Assembly
λ-199	1	1/4 Lock Washer	IGK-1039R	1	Drive Shaft Assembly
8X-707	1	1/4-20x1 7/8 Fill. Hd. Screw	SW-213	1	Dist. Drive Rivet
IGK-26	1	Washer - .020" Thick	X-196	4	#10 Lock Washer
IGK-1003	1	Dist. Cap Assembly	8X-872	2	#10-32x1/4 Fill. Hd. Screw
IA-213	1	Contact Spring	8X-902	2	#10-32x3/8 Fill. Hd. Screw
IG-514	1	Contact Spring Plunger			1 2 3 4 5
IGK-1016	1	Rotor Assembly			(Issued 11-16-37)
IA-213	1	Contact Spring			
IA-218	1	Contact Spring Plunger			
*	1	Cam & Stop Plate - 8 Cyl. R.H.			
*	1	Dist. Base Assembly			
IG-326	2	Hinge Pin			
*	1	Name Plate			
IG-579A	2	Absorbent Bronze Brg.			
IGK-7	2	Dist. Cap Spring			
X-488	1	Oiler - Press in Elbow			
X-1042	2	#13x3/16 Escutcheon Pin			
IGK-2004	1	Breaker Plate Assembly			
GK-151	2	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-2671	2	Condenser Assembly			
IGE-14	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGK-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33‡	1	Breaker Screw Point			
IGK-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33‡	1	Breaker Screw Point			
IGP-3028‡	2	Breaker Arm Assembly			
IGP-30	2	Breaker Arm Spring			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Dist. Base Assy.	Name Plate	Weight Spring	Weight Sp. Set	Cam & Stop Plate
IGK-4101	IGK-2039R	IGK-2001	IG-511	IG-817 (2)	IG-817S	IGK-1030R
IGK-4101A	IGK-2039RA	IGK-2001A	IG-511B	IGB-266 (2)	IGB-266S	IGK-1030RA
IGK-4101B	IGK-2039RB	IGK-2001B	IG-511A	IG-913 IGC-42	1 ea. IGC-42AS	IGK-1030RB

* See table following parts list for part number applying to assembly wanted.

‡ Service Breaker Point Set IGP-3028BS.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGK-4102 DISTRIBUTOR PARTS LIST

IGK-4102

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GK-151	2	Plain Steel Washer	IGK-2039RB	1	Drive Shaft & Gov. Assy.
IG-90	1	Thrust Washer	IG-9131	1	Weight Spring
IG-94	18	H.T. Wire Terminal	IG-1456	2	Weight Assy.
IG-495	1	Cam Sleeve Felt Wick	IGC-421	1	Weight Spring
IG-816	1	Thrust Washer	IGK-1039R	1	Drive Shaft Assy.
IG-853	1	Dist. Drive Sleeve	IGK-2040	1	Dist. Base Assy.
IGB-162	1	Thrust Washer	IG-326	2	Hinge Pin
IGE-35	2	Governor Control Spring	IG-511A	1	Name Plate
IGE-1046	1	Hold Down Arm Assy.	IG-579A	2	Absorbent Bronze Erg.
8X-146	1	1/4-20 Hex. Nut	IGK-7	2	Dist. Cap Spring
X-199	1	1/4 Lock Washer	X-488	1	Oiler - Press in Elbow
8X-707	1	1/4-20x1 7/8 Fill.Hd.Sc.	X-1042	2	#13x3/16 Escutcheon Pin
IGK-26	1	Washer - .020" Thick	SW-213	1	Distributor Drive Rivet
IGK-1003	1	Dist. Cap Assy.	X-196	4	#10 Lock Washer
IA-213	1	Contact Spring	8X-872	2	#10-32x1/4 Fill. Hd. Screw
IG-514	1	Contact Spring Plunger	8X-902	2	#10-32x3/8 Fill. Hd. Screw
IGK-1016	1	Rotor Assembly			1 2 3 4 5
IA-213	1	Contact Spring			
IA-218	1	Contact Spring Plunger			
IGK-103ORB	1	Cam & Stop Plate - 8 Cyl.R.H.			(Issued 10-18-37)
IGK-2004	1	Breaker Plate Assy.			
GK-151	2	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-2671	2	Condenser Assy.			
IGE-14	1	Primary Connector Assy.			
IGB-132	2	Terminal			
IGE-15	1	#6 Plain Washer			
IGK-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-331	1	Breaker Screw Point			
IGK-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-331	1	Breaker Screw Point			
IGP-30281	2	Breaker Arm Assy.			
IGP-30	2	Breaker Arm Spring			
X-194	4	#6 Lock Washer			
8X-302	2	#6-32x1/4 Rd. Hd. Screw			
8X-321	2	#10-32x5/16 Rd. Hd. Sc.			
8X-323	1	#6-32x5/16 Rd. Hd. Screw			
X-537	2	#10 Lock Washer			
8X-873	3	#6-32x3/16 Fill. Hd. Sc.			
X-1012	2	#6 Lock Washer			
	1	2 3 4 5			

† Service Breaker Point Set IGP-3028BS & Service Weight Spring Set IGC-42AS.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGM-4003,A DISTRIBUTOR PARTS LIST

IGM-4003,A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
CA-35A	4	#10-32 Nut	*	1	Drive Shaft & Gov. Assy.
DB-13	1	Flat Felt Guard	*	2	Weight Spring
IG-313	1	Shaft Thrust Washer	IG-2456	2	Weight Assy.
IG-687	1	Spring Washer	*	1	Drive Shaft Assy.
IG-688D	3	Advance Control Washer	IGM-2004	1	Breaker Plate Assy.
IGB-162	1	Thrust Washer	GK-151A	1	Plain Steel Washer
IGL-7	2	Terminal Insulation	IA-131	2	Breaker Arm Spring Clip
IGL-8A	2	Terminal Post - #10-32	IG-1839A†	1	Breaker Point
IGL-9	2	Insulating Washer	IG-2671A	1	Condenser Assy.
IGL-10	2	Insulating Bushing	IG-2671E	1	Condenser Assy.
IGL-38	1	Felt Washer	IGL-13	1	Primary Connector Assy.
IGL-42A	1	Advance Control Screw	IGB-132	1	Terminal
IGL-44	1	Distributor Drive Coupling	IGL-5	1	Terminal
IGL-1028	1	Oiler Assy.	IGL-14	1	Primary Connector Assy.
IGL-28	1	Oil Wick	IGB-132	1	Terminal
X-475	1	3/8-24 Elbow Oiler	IGL-6	1	Terminal
IGL-1035	1	Cam Lock Screw	IGL-1012	1	Breaker Sub Plate Assy.
IGM-22L	1	Breaker Cam - 12Cyl. 6 L.H.	IB-23	1	Breaker Point Lock Nut
IGM-26	1	Oil Wick	IGP-33‡	1	Breaker Screw Point
IGM-1016	1	Rotor Assy.	IGM-1004	1	Breaker Plate Part Assy.
IA-213	1	Contact Spring	IGP-3028‡	2	Breaker Arm Assy.
IA-218	1	Contact Spring Plunger	IGP-30	2	Breaker Arm Spring
*	1	Breaker Cam Shaft Assy.	X-194	2	#6 Lock Washer
IGL-25	1	1/2 Spec. Lock Washer	X-195	3	#8 Lock Washer
IGL-26	1	1/2-20 Nut	8X-323	2	#6-32x5/16 Rd. Hd. Sc.
*	1	Stop Plate	8X-350	3	#8 Plain Washer
IGL-90	2	Spacing Washer	X-537	1	#10 Lock Washer
IGM-24	1	Breaker Cam Shaft	8X-870	1	#10-32x5/16 Fill. Hd. Sc.
X-367	1	Ball Bearing	8X-873	3	#6-32x3/16 Fill. Hd. Sc.
IGM-2001A	1	Dist. Base Assy.	X-1012	4	#6 Lock Washer
IG-511	1	Name Plate	8X-1348	1	#6-32x5/16 Fill. Hd. Sc.
IG-579A	2	Absorbent Bronze Brg.	8X-1349	3	#8-32x3/8 Fill. Hd. Sc.
IGL-1020	2	Dist. Cap Spring & Bracket Assy.	SW-213	1	Dist. Drive Rivet
IG-217	2	Dist. Cap Spring	8X-119	2	#10-32x1/2 Fill. Hd. Screw
IGL-20	2	Dist. Cap Spring Bracket	8X-163	2	1/4-20 Hex. Nut
IGL-21	2	Hinge Pin	8X-183	2	#10 Brass Washer
IGM-1027	1	Advance Control Arm	X-196	6	#10 Lock Washer
SA-31	1	Wick	X-199	1	1/4 Lock Washer
X-61	4	#10-32x7/16 Flat Hd. Sc.	8X-932	1	1/4-20x15/16 Hex. Hd. Screw
X-474	1	Oiler - Elbow			1 2 3 4 5
8X-908	4	#6-32x1/4 Fill. Hd. Sc.			(Issued 11-21-38)
X-1025	4	#6 Lock Washer			
8X-1042	2	#13x3/16 Escutcheon Pin			
		1 2 3 4 5			

Assy. No.	Shaft & Gov. Assy.	Weight Spring	Weight Spr. Set
IGM-4003	IGM-2002LD	IGB-250	IGB-250S
IGM-4003A	IGM-2002LF	IG-727	IG-727S
Assy. No.	Drive Shaft Assy.	Cam Assy.	Stop Plate
IGM-4003	IGM-1002L	IGM-1024B	IGL-46B
IGM-4003A	IGM-1002LB	IGM-1024	IGL-46

‡ Service Breaker Point Set IGP-3028DS.

* See table following parts list for part number applying to assembly wanted.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking su -parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGM-4005 DISTRIBUTOR PARTS LIST

IGM-4005

PRELIMINARY

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
CA-35	4	#10-32 Hex. Nut	IGM-2005	1	Distributor Base Assembly
DB-13	1	Flat Felt Guard	IG-511	1	Name Plate
IG-94	14	H. T. Wire Terminal	IG-579A	2	Absorbent Bronze Brg.
IG-313	2	Shaft Thrust Washer	IGL-1020	2	Dist. Cap Spring & Bracket Assembly
IG-687	2	Spring Washer	IG-217	2	Dist. Cap Spring
IG-688D	4	Advance Control Washer	IGL-20	2	Dist. Cap Spring
IGL-7	2	Terminal Insulation	IGL-21	2	Bracket
IGL-8	2	Terminal Post - #10-32	SA-31	1	Hinge Pin
IGL-9	2	Insulating Washer	X-474	1	Wick
IGL-10	2	Insulating Bushing	X-474	1	Oiler - Elbow
IGL-38	1	Felt Washer	8X-908	4	#6-32x1/4 Fill. Hd. Sc.
IGL-42A	2	Advance Control Screw	X-1025	4	#6 Lock Washer
IGL-1028	1	Oiler Assembly	8X-1042	2	#13x3/16 Escutcheon Pin
IGL-28	1	Oil Wick	X-61	4	#10-32x7/16 Flat Hd. Screw
X-475	1	3/8-24 Elbow Oiler	8X-119	2	#10-32x1/2 Fill. Hd. Screw
IGL-1035	1	Cam Lock Screw	8X-163	2	1/4-20 Hex. Nut
IGM-6	1	Drive Shaft Assembly	8X-183A	2	#10 Plain Washer
IGM-7	1	Spacer	X-196	6	#10 Lock Washer
IGM-22L	1	Breaker Cam - 12 Cyl. 6 L.H.	X-367	1	Ball Bearing
IGM-1003L	1	DISTRIBUTOR CAP ASSEMBLY			1 2 3 4 5
IA-213	1	Contact Spring			
IG-514	1	Contact Spring Plunger			
IGM-1016	1	ROTOR ASSEMBLY			
IA-213	1	Contact Spring			
IA-218	1	Contact Spring Plunger			
IGM-1034A	1	Advance Control Arm			
IGM-2004	1	Breaker Plate Assembly			
GK-151A	1	Plain Steel Washer			
IA-131	2	Breaker Arm Spring Clip			
IG-1839A†	1	Breaker Point			
IG-2671A	1	CONDENSER ASSEMBLY			
IG-2671E	1	CONDENSER ASSEMBLY			
IGL-13	1	Primary Connector Assy.			
IGB-132	1	Terminal			
IGL-5	1	Terminal			
IGL-14	1	Primary Connector Assy.			
IGB-132	1	Terminal			
IGL-6	1	Terminal			
IGL-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
IGM-1004	1	Breaker Plate Part Assy.			
IGP-3028†	2	Breaker Arm Assembly			
IGP-30	2	Breaker Arm Spring			
X-194	2	#6 Lock Washer			
X-195	3	#8 Lock Washer			
8X-323	2	#6-32x5/16 Rd. Hd. Screw			
8X-350	3	#8 Plain Washer			
X-537	1	#10 Lock Washer			
8X-870	1	#10-32x5/16 Fill. Hd. Sc.			
X-1012	4	#6 Lock Washer			
8X-1348	1	#6-32x5/16 Fill. Hd. Sc.			
8X-1349	3	#8-32x3/8 Fill. Hd. Sc.			
8X-1546	3	#6-32x5/32 Fill. Hd. Sc.			
	1	2 3 4 5			

(Issued 7-3-41)

† SERVICE CONTACT SET IGP-3028DS.

UNIT	APPLICATION
IGM-4005	Auto Engine Works

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGO-4002, A DISTRIBUTOR PARTS LIST

IGO-4002, A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
CA-35	4	#10-32 Nut	IGO-14	1	Primary Connector Assy.
IG-313	1	Shaft Thrust Washer	IGB-132	1	Terminal
IG-644	1	Dist. Drive Coupling	IGL-5	1	Terminal
IGB-162	1	Thrust Washer	IGO-15	1	Primary Connector Assy.
IGL-7	2	Terminal Insulation	IGB-132	1	Terminal
IGL-8	2	Terminal Post - #10-32	IGL-6	1	Terminal
IGL-9	2	Insulating Washer	IGO-1004	1	Breaker Plate Part Assy.
IGL-10	2	Insulating Bushing	IGO-1013	1	Breaker Sub Plate Assy.
IGL-36	1	Dist. Cap Nut	IB-23	1	Breaker Point Lock Nut
IGL-40	2	#10-32 Nut	IGP-33†	1	Breaker Point Screw
IGM-26	1	Oil Wick	IGO-1034†	1	Breaker Point
IGO-37	1	Dist. Cap Cover	IGP-3028†	2	Breaker Arm Assy.
*	1	Drive Shaft & Gov. Assy.	IGP-30	2	Breaker Arm Spring
*	2	Weight Spring	X-194	2	#6 Lock Washer
*	2	Weight Assy.	X-195	2	#8 Lock Washer
IGO-1002L	1	Drive Shaft Assy.	8X-323	2	#6-32x5/16 Rd. Hd. Screw
*	1	Governor Control Spring	8X-350	2	#8 Plain Washer
IGO-1003	1	Dist. Cap Assy.	X-537	1	#10 Lock Washer
IA-213	1	Contact Spring	8X-870	1	#10-32x5/16 Fill. Hd. Sc.
IG-514	1	Contact Spring Plunger	X-1012	3	#6 Lock Washer
IGO-1016	1	Rotor Assy.	8X-1349	2	#8-32x3/8 Fill. Hd. Sc.
IA-213	1	Contact Spring	8X-1546	3	#6-32x5/32 Fill. Hd. Sc.
IA-218	1	Contact Spring Plunger	*	1	Breaker Cam Shaft Assy.
IGO-1028	1	Oiler Assy.	DB-13	1	Flat Felt Guard
IGO-28	1	Oil Wick	IGL-26	1	1/2-20 Nut
X-400	1	3/8 Elbow Oiler	IGL-38	1	Felt Washer
IGO-1033	1	Breaker Cam Oiler	IGL-90	1	Spacing Washer
IGO-2001	1	Dist. Base Assy.	*	1	Stop Plate
IG-511	1	Name Plate	IGO-48	1	1/2 Special Lock Washer
IG-579A	2	Absorbent Bronze Brg.	IGO-1024L	1	Cam & Shaft
IGO-1020	2	Dist. Cap Spring & Bracket Assy.	X-367	1	Ball Bearing
IGO-20	2	Dist. Cap Spring Bracket	SW-213	1	Dist. Drive Rivet
IGO-21	2	Hinge Pin	8X-119	2	#10-32x1/2 Fill. Hd. Screw
IGO-50	2	Dist. Cap Spring	2X-183	3	#10 Brass Washer
SA-31	1	Felt Wick	X-195	1	#8 Lock Washer
X-474	1	1/4 Oiler - Press in Elbow	X-196	20	#10 Lock Washer
2X-908	4	#6-32x1/4 Fill. Hd. Screw	8X-350	1	#8 Plain Washer
X-1025	4	#6 Lock Washer	2X-902	12	#10-32x3/8 Fill. Hd. Screw
2X-1042	2	#13x3/16 Escutcheon Pin	X-1012	1	#6 Lock Washer
IGO-2004	1	Breaker Plate Assy.	8X-1348	1	#6-32x5/16 Fill. Hd. Screw
GK-151A	1	Plain Steel Washer	8X-1349	1	#8-32x3/8 Fill. Hd. Screw
IA-131	2	Breaker Arm Spring Clip			1 2 3 4 5
IG-2671A	1	Condenser Assy.			
IG-2671E	1	Condenser Assy.			
		1 2 3 4 5			

† Service Breaker Point Set IGP-3028DS.

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Dr. Shaft & Gov. Assy.	Cam Shaft Assy.	Stop Plate	Control Spring	Weight Assy.
IGO-4002	IGM-2002LA	IGO-2024L	IGO-47	None	IG-2456
IGO-4002A	IGC-2002LA	IGO-2024LB	IGO-47B	IGC-36	IG-2322

Assembly No.	Weight Spring	Weight Spr. Set
IGO-4002	IG-776	IG-776S
IGO-4002A	IG-775	IG-775S

(Issued 7-30-40)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4001A DISTRIBUTOR PARTS LIST
-B

IGP-4001A
-B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GE-40	1	Dist. Gear - Follower	SW-213	1	Distributor Drive Rivet
IA-278	9	Secondary Term. Rubber Cap	SP-4009	1	Resistance Unit Assy.
IG-90	1	Thrust Washer	8X-196	1	#10 Lock Washer
IG-94	9	H. T. Wire Terminal	6X-321	1	#10-32x5/16 Rd. Hd. Sc.
IG-680	1	Lock Spring Ring	X-196	4	#10 Lock Washer
IG-1325	1	Distributor Cap Assy.	6X-794	1	#10-32 Square Nut
IG-514	1	Contact Spring Plunger	6X-870	2	#10-32x5/16 Fill. Hd. Sc.
IG-515	1	Contact Spring	6X-872	2	#10-32x1/4 Fill. Hd. Sc.
IG-1576	1	Rotor	6X-891	1	#10-32x1 1/2 Fill. Hd. Sc.
IGB-162	1	Thrust Washer	X-999	1	Terminal
IGB-216	1	Advance Control Arm			1 2 3 4 5
IGH-28	1	Cam Sleeve Felt Wick			(Issued 7-10-35)
*	1	Drive Shaft & Gov. Assy.			(R-3-24-37)
*	2	Weight Spring			
IG-1456	2	Weight Assembly			
*	1	Drive Shaft Assembly			
IGK-26	1	Washer - .020" Thick			
IGP-1023R	1	Cam & Stop Plate - 8 cyl. R. H.			
IGP-2001	1	Dist. Base Assembly			
IG-511	1	Name Plate			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
K-374	2	3/32x1/4 Split Rivet			
K-488	1	1/4 Oiler - Press in Elbow			
K-1448	2	Hinge Pin			
IGP-2004A	1	Breaker Plate Assy.			
IA-131	1	Breaker Arm Spring Clip			
IG-2671	1	Condenser Assembly			
IGP-1004A	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-331	1	Breaker Point Screw			
IGP-30281	1	Breaker Arm Assembly			
IGP-30	1	Breaker Arm Spring			
X-194	1	#6 Lock Washer			
8X-302	1	#6-32x1/4 Rd. Hd. Screw			
8X-873	1	#6-32x3/16 Fill. Hd. Sc.			
X-1012	1	#6 Lock Washer			
IGS-32	1	Rubber Plug			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Weight Spring	Dr. Shaft Assy.
IGP-4001A	IGH-2048R	IA-77 IG-796	IGH-1048R
IGP-4001B	IGH-2048RA	IGB-252	IGH-1048RA


* See table following parts list for part number applying to assembly wanted.

‡ Service Breaker Point Set IGP-3028A.

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

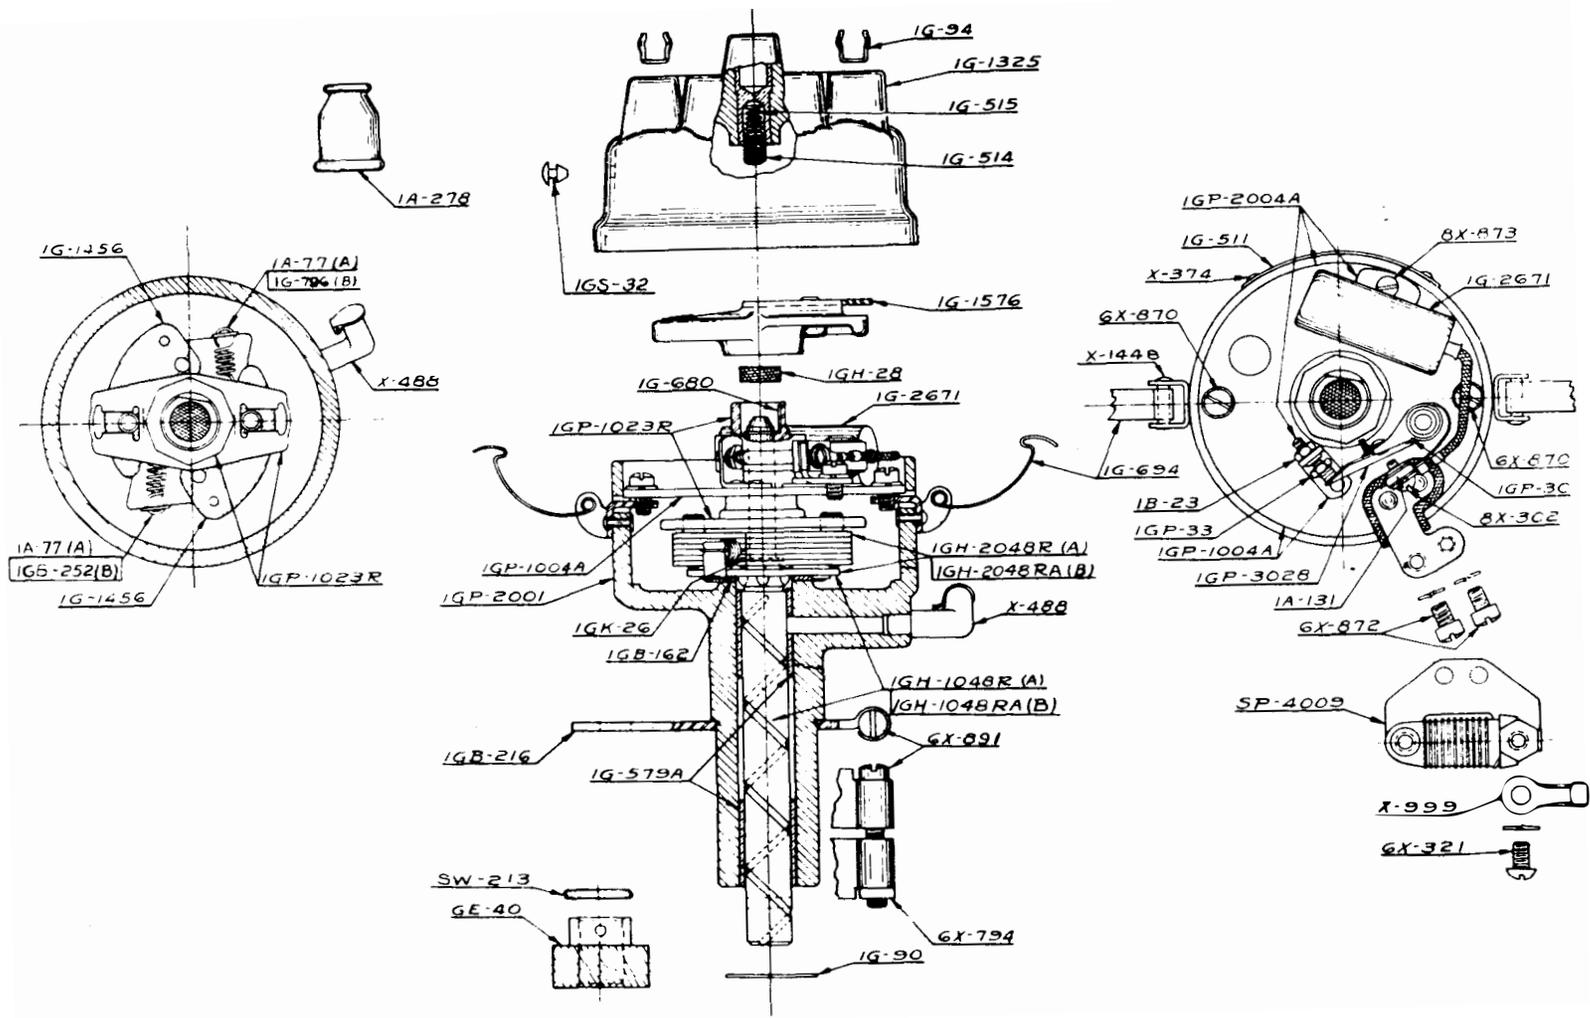

IGP-4001A-B DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4002,
A,B DISTRIBUTOR PARTS LIST

IGP-4002,
A,B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IG-579A	2	Absorbent Bronze Brg.
IG-644	1	Dist. Drive Coupling	IG-694	2	Dist. Cap Spring
IG-680	1	Lock Spring Ring	IGP-34	1	Felt Wick
IG-816A	1	Thrust Washer	X-374	2	3/32x1/4 Split Rivet
IGB-162	1	Thrust Washer	X-488	1	1/4 Oiler-Press in Elbow
IGB-247	1	Dist. Drive Rivet	8X-86	1	1/4-20x5-8 Hex. Hd. Screw
IGC-24N	1	Advance Control Arm	8X-146	1	1/4-20 Hex. Nut
IGH-28	1	Cam Sleeve Felt Wick	8X-163	1	1/4-20 Hex. Nut
IGH-30	1	Dist. Cap Cover	8X-183	1	#10 Brass Washer
IGH-36	1	Dist. Cap Nut	X-196	4	#10 Lock Washer
IGH-1041	1	Rotor	X-199	2	1/4 Lock Washer
IGH-1045	1	Distributor Cap Assy.	8X-707	1	1/4-20x1 7/8 Fill. Hd. Screw
IG-514	1	Contact Spring Plunger	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IG-515	1	Contact Spring	8X-872	1	#10-32x1/4 Fill. Hd. Screw
*	1	Drive Shaft & Gov. Assy.			1 2 3 4 5
*	2	Weight Spring			
*	2	Weight Assy.			(Issued 10-23-36)
IGH-1038LA	1	Drive Shaft Assy.			
IGK-26	1	Washer - .020" Thick			
*	1	Cam & Stop Plate - 8 cyl. L.H.			
IGP-2004	1	Breaker Plate Assy.			
IA-131	1	Breaker Arm Spring Clip			
IG-2671	1	Condenser Assy.			
IGP-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33	1	Breaker Point Screw			
IGP-3028	1	Breaker Arm Assy.			
IGP-30	1	Breaker Arm Spring			
X-194	1	#6 Lock Washer			
8X-302	1	#6-32x1/4 Rd. Hd. Screw			
8X-873	1	#6-32x3/16 Fill. Hd. Screw			
X-1012	1	#6 Lock Washer			
*	1	Dist. Base Assembly			
IG-352	2	Hinge Pin			
*	1	Name Plate			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Weight Spring	Weight Sp. Set	Weight Assy.	Cam & Stop Plate	Dist. Base	Name Plate
IGP-4002	IGH-2038LA-1	IG-913	IG-913S	IG-2322	IGP-1023L	IGP-2035A	IG-511A
IGP-4002A	IGH-2038LC	IGB-252	IGB-252S	IG-2322	IGP-1023L	IGP-2035	IG-511
IGP-4002B	IGH-2038LD	IGB-210	IGB-210S	IG-2456	IGP-1023LA	IGP-2035	IG-511

* See table following parts list for part number applying to assembly wanted.

NOTE:- Use IGP-3028A breaker point set and * weight spring set in servicing this unit.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4003 DISTRIBUTOR PARTS LIST

IGP-4003

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGP-2039	1	Dist. Base Assembly
IG-644	1	Dist. Drive Coupling	IG-352	2	Hinge Pin
IG-680	1	Lock Spring Ring	IG-511	1	Name Plate
IGB-154A	1	Advance Control Arm	IG-579A	2	Absorbent Bronze Brg.
IGB-162	1	Thrust Washer	IG-694	2	Dist. Cap Spring
IGB-247	1	Dist. Drive Rivet	IGP-34	1	Felt Wick
IGC-104	1	Advance Arm Pointer	X-374	2	3/32x1/4 Split Rivet
IGH-28	1	Cam Sleeve Felt Wick	X-490	1	Press in - Sleeve Oiler
IGH-30	1	Dist. Cap Cover	6X-183	1	#10 Brass Washer
IGH-36	1	Dist. Cap Nut	X-196	3	#10 Lock Washer
IGH-1041	1	Rotor	6X-794	1	#10-32 Square Nut
IGH-1045	1	Dist. Cap Assembly	6X-870	2	#10-32x5/16 Fill. Hd. Screw
IG-514	1	Contact Spring Plunger	6X-872	1	#10-32x1/4 Fill. Hd. Screw
IG-515	1	Contact Spring	6X-891	1	#10-32x1 1/2 Fill. Hd. So.
IGH-2038RB	1	Drive Shaft & Gov. Assy.			1 2 3 4 5
IG-884	2	Weight Spring			
IG-1456	2	Weight Assembly			(Issued 9-26-34)
IGH-1038R	1	Drive Shaft Assy.			(R-8-7-36)
IGK-26	1	Washer - .020" Thick			
IGP-1023RA	1	Cam & Stop Plate - 8 cyl. R.H.			
IGP-2004	1	Breaker Plate Assy.			
IA-131	1	Breaker Arm Spring Clip			
IG-2671	1	Condenser Assembly			
IGP-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33	1	Breaker Point Screw			
IGP-3028	1	Breaker Arm Assembly			
IGP-30	1	Breaker Arm Spring			
X-194	1	#6 Lock Washer			
8X-302	1	#6-32x1/4 Rd. Hd. Screw			
8X-873	1	#6-32x3/16 Fill. Hd. So.			
X-1012	1	#6 Lock Washer			
		1 2 3 4 5			

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4006 DISTRIBUTOR PARTS LIST

IGP-4006


Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	X-374	2	3/32x1/4 Split Rivet
IG-644	1	Dist. Drive Coupling	X-488	1	1/4 Oiler - Press in Elbow
IG-680	1	Lock Spring Ring	8X-86	1	1/4-20x5/8 Hex. Hd. Screw
IG-816A	1	Thrust Washer	8X-146	1	1/4-20 Hex. Nut
IGB-162	1	Thrust Washer	8X-163	1	1/4-20 Hex. Nut
IGB-247	1	Dist. Drive Rivet	8X-183	1	#10 Brass Washer
IGC-24N	1	Advance Control Arm	X-196	4	#10 Lock Washer
IGH-28	1	Cam Sleeve Felt Wick	X-199	2	1/4 Lock Washer
IGH-30	1	Dist. Cap Cover	8X-707	1	1/4-20x1 7/8 Fill. Hd. Sc.
IGH-36	1	Dist. Cap Nut	8X-870	2	#10-32x5/16 Fill. Hd. Sc.
IGH-1041	1	Rotor	8X-872	1	#10-32x1/4 Fill. Hd. Sc.
IGH-1063	1	Dist. Cap Assembly			1 2 3 4 5
IG-514	1	Contact Spring Plunger			
IG-515	1	Contact Spring			
IGH-2038RC	1	Drive Shaft & Gov. Assy.			(Issued 11-5-35)
IG-913	2	Weight Spring			
IG-1322	2	Weight Assembly			
IGH-1038R	1	Drive Shaft Assy.			
IGK-26	1	Washer - .020" Thick			
IGP-1023RB	1	Cam & Stop Plate - 8 cyl. R.H.			
IGP-2004	1	Breaker Plate Assembly			
IA-131	1	Breaker Arm Spring Clip			
IG-2671	1	Condenser Assy.			
IGP-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33	1	Breaker Point Screw			
IGP-3028	1	Breaker Arm Assembly			
IGP-30	1	Breaker Arm Spring			
X-194	1	#6 Lock Washer			
8X-302	1	#6-32x1/4 Rd. Hd. Screw			
8X-873	1	#6-32x3/16 Fill. Hd. Sc.			
X-1012	1	#6 Lock Washer			
IGP-2035	1	Dist. Base Assembly			
IG-352	2	Hinge Pin			
IG-511	1	Name Plate			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
IGP-34	1	Felt Wick			
		1 2 3 4 5			

Printed in U. S. A.

File in
Eq ipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGP-4006 DISTRIBUTOR ILLUSTRATION

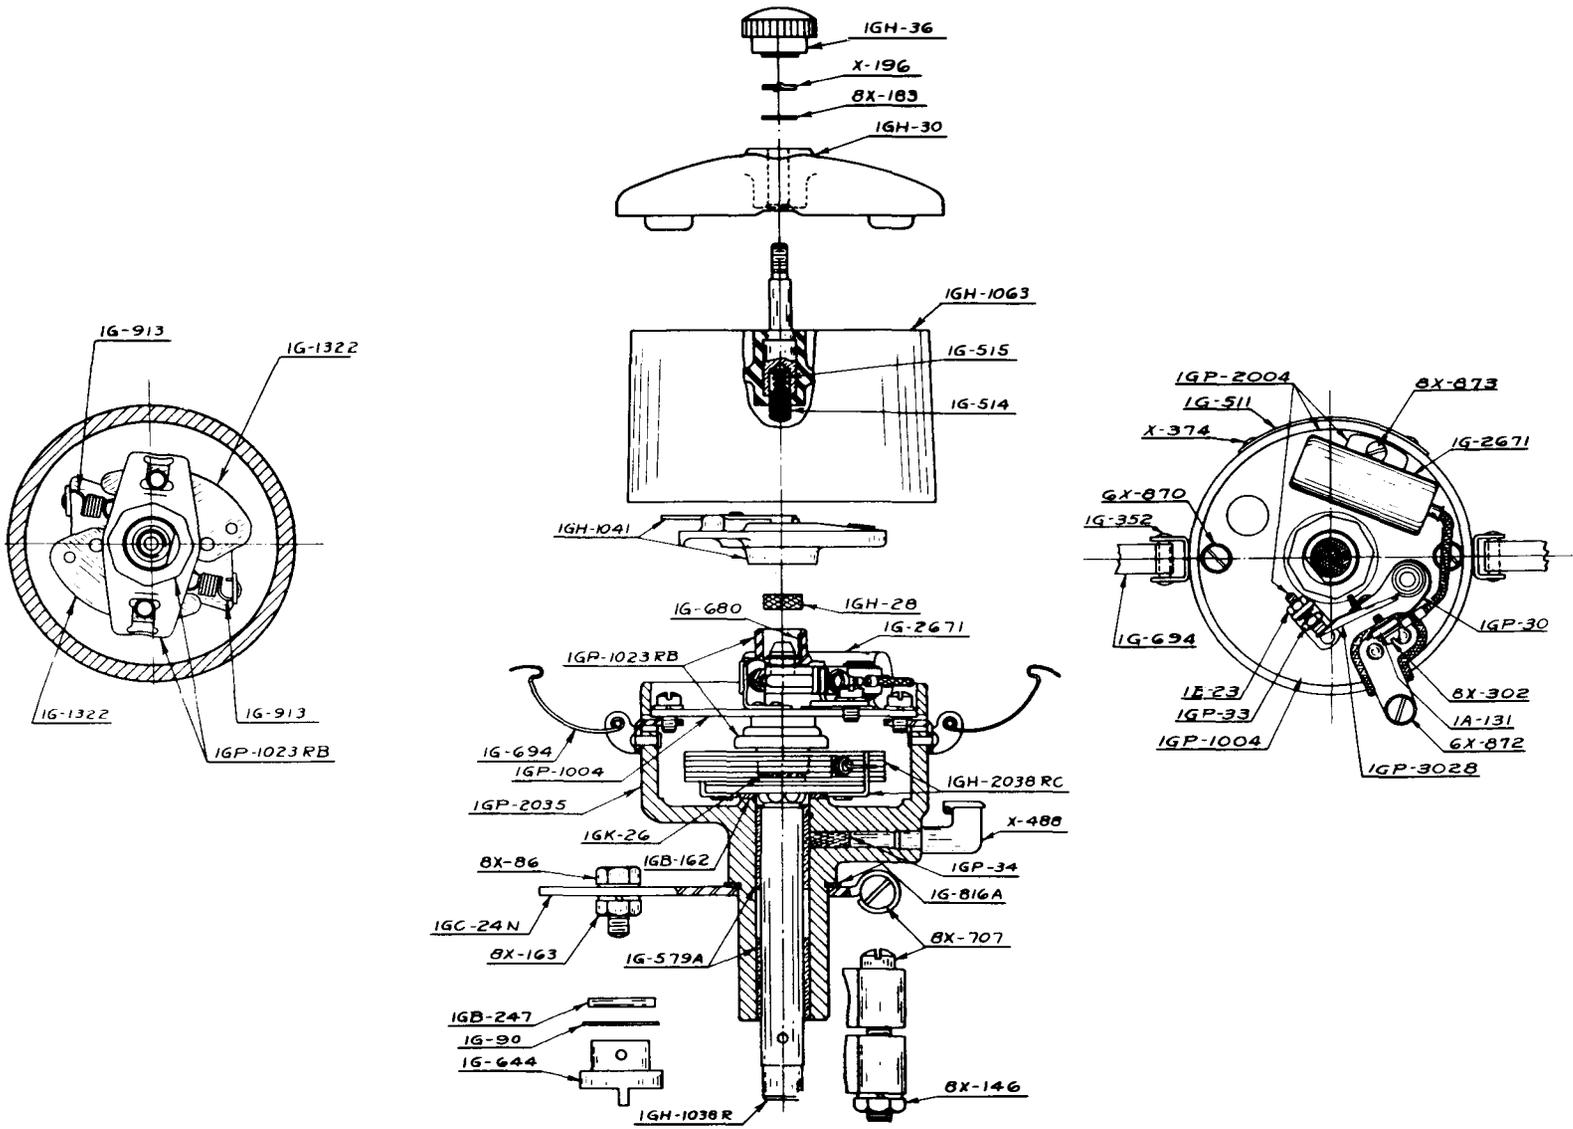

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4007 DISTRIBUTOR PARTS LIST

IGP-4007

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	1					Thrust Washer
IG-94	9					H.T. Wire Terminal
IG-680	1					Lock Spring Ring
IG-816A	1					Thrust Washer
IGB-162	1					Thrust Washer
IGC-24N	1					Advance Control Arm
IGH-28	1					Cam Sleeve Felt Wick
IGH-2C26RA	1					Drive Shaft & Gov. Assy.
IG-1456	2					Weight Assy.
IGE-24†	2					Weight Spring
IGH-1026R	1					Drive Shaft Assy.
IGK-26	1					Washer - .020" Thick
IGP-1003	1					Dist. Cap Assembly
IG-514	1					Contact Spring Plunger
IG-515	1					Contact Spring
IGP-1016	1					Rotor
IGP-1023RC	1					Cam & Stop Plate - 8 Cyl. R.H.
IGP-2004	1					Breaker Plate Assembly
IA-131	1					Breaker Arm Spring Clip
IG-2671	1					Condenser Assembly
IGP-1004	1					Breaker Plate Part Assy.
IB-23	1					Breaker Point Lock Nut
IGP-33†	1					Breaker Point Screw
IGP-3028†	1					Breaker Arm Assembly
IGP-30	1					Breaker Arm Spring
X-194	1					#6 Lock Washer
8X-302	1					#6-32x1/4 Rd. Hd. Screw
8X-873	1					#6-32x3/16 Fill. Hd. Sc.
X-1012	1					#6 Lock Washer
IGP-2035	1					Dist. Base Assembly
IG-511	1					Name Plate
IG-579A	2					Absorbent Bronze Brg.
IG-694	2					Dist. Cap Spring
IGP-34	1					Felt Wick
X-374	2					3/32x1/4 Split Rivet
X-488	1					1/4 Oiler - Press in Elbow
X-1448	2					Hinge Pin
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
8X-86	1					1/4-20x5/8 Hex. Hd. Screw
8X-146	1					1/4-20 Hex. Nut
8X-163	1					1/4-20 Hex. Nut
X-196	3					#10 Lock Washer
X-199	2					1/4 Lock Washer
8X-707	1					1/4-20x1 7/8 Fill. Hd. Sc.
8X-870	2					#10-32x5/16 Fill. Hd. Sc.
8X-872	1					#10-32x1/4 Fill. Hd. Sc.
		1	2	3	4	5

(Issued 6-18-37)


† Service Weight Spring Set IGE-24S &
Service Breaker Point Set IGP-3028A.

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGP-4007 DISTRIBUTOR ILLUSTRATION

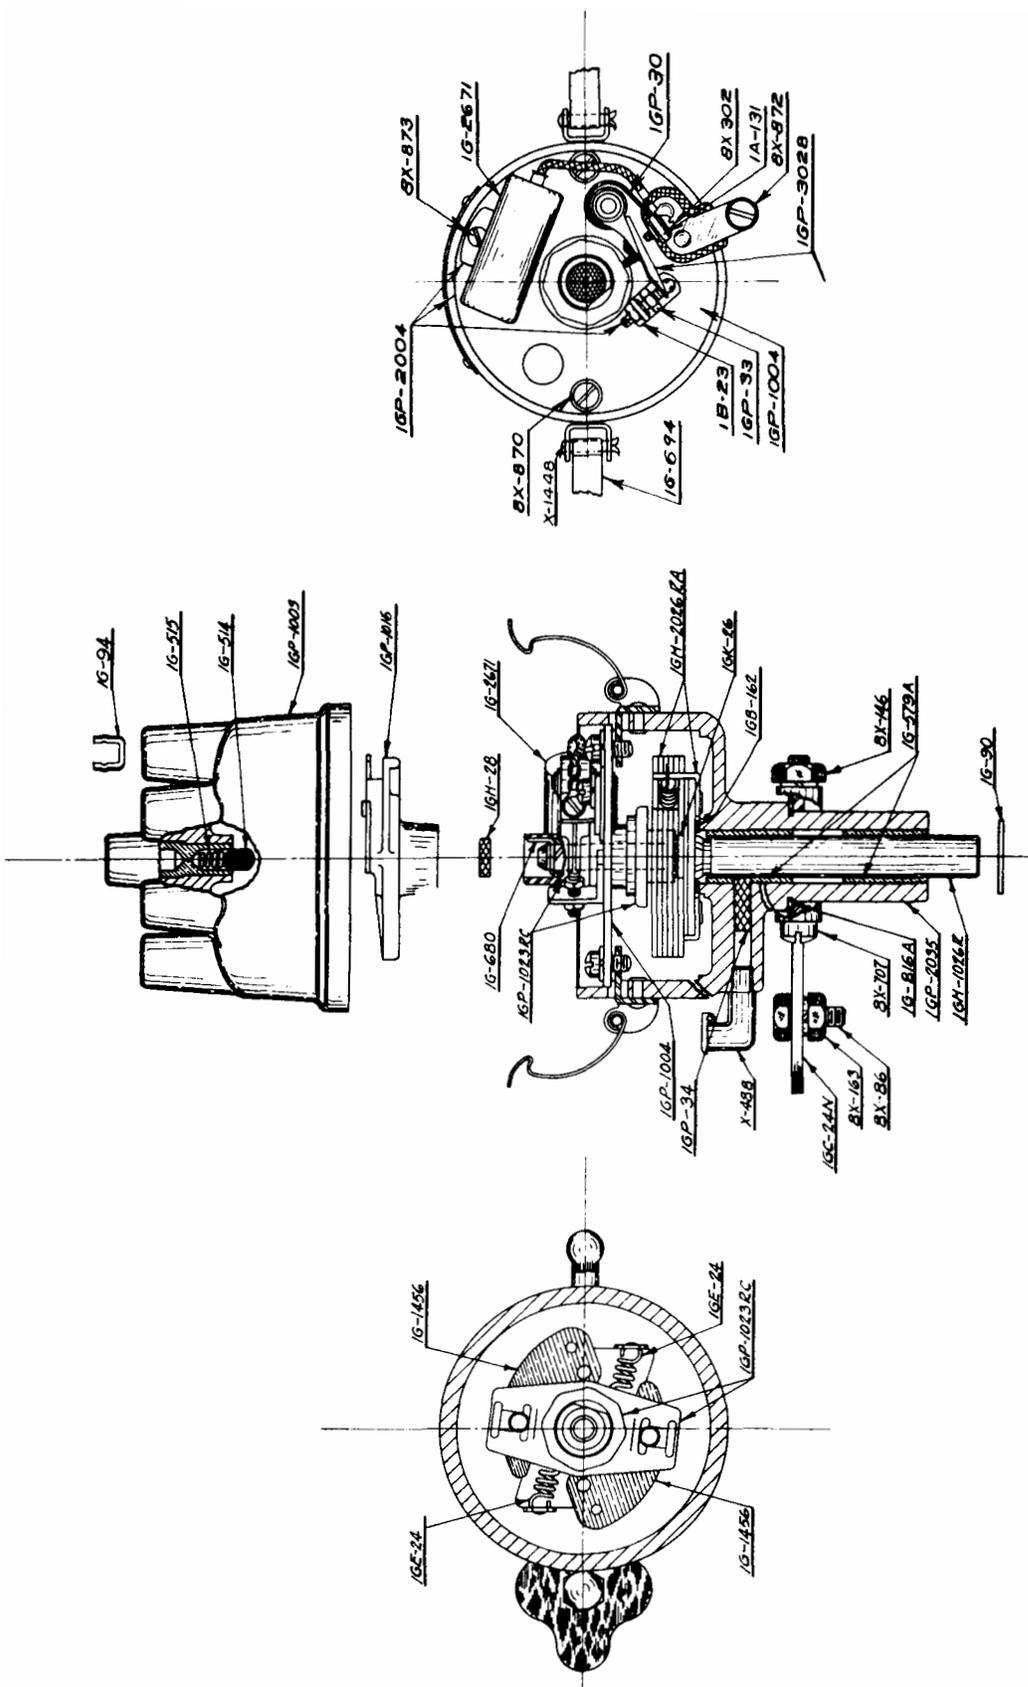

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4008A, B DISTRIBUTOR PARTS LIST

IGP-4008A,B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GE-40	1	Gear, Dist., Follower	X-194	1	Lockwasher, Contact Spring Screw, #6
IA-278	9	Cap, Rubber, Secondary Term.	8X-302	1	Screw, Contact Spring, Rd. Hd., #6-32x1/4
IG-90	1	Washer, Thrust, Drive Shaft, Lower	X-1012	1	Lockwasher, Condenser Mtg., #6
IG-94	9	Terminal, H.T. Wire	8X-1546	1	Screw, Condenser Mtg., Fil. Hd., #6-32x5/32
IG-680	1	Snap Ring, Cam Retaining	IGS-32	1	Plug, Rubber, Vent. Hole
IG-1325	1	Cap Assy., Dist.	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IG-514	1	Contact, Plunger	*	1	Spring, Anti-Rattle
IG-515	1	Spring, Contact	SW-213	1	Rivet, Gear
IG-1576	1	Rotor	X-196	3	Lockwasher, Breaker Plate & Terminal Screw, #10
IGB-1216	1	Arm, Advance	8X-321	1	Screw, Lead Connection Rd. Hd. #10-32x5/16
IGH-28	1	Wick, Felt, Cam Sleeve	8X-870	2	Screw, Mtg., Breaker Plate, Fil. Hd., #10-32x5/16
*	1	Shaft & Gov. Assy.	X-999	1	Terminal
IG-1456	2	Weight, Governor			1 2 3 4 5
*	1	Spring Set, Gov. Weight	† Service Contact Set IGP-3028A. * See table following parts list for part number applying to assembly wanted.		
*	1	Shaft, Drive			
*	1	Spacer, Cam			
*	1	Cam, & Stop Plate, 8 Cyl., R.H.			
IGP-2001	1	Base Assy., Dist.			
IG-579A	2	Bearing, Absorbent Bronze			
IG-694	2	Spring			
X-488	1	Oiler, Elbow, Press in, 1/4			
X-1448	2	Pin, Hinge, Cap Spring			
IGP-2004A	1	Plate Assy., Breaker			
IA-131	1	Clip, Contact Spring			
IG-2671	1	Condenser			
IGP-1004A	1	Plate Assy., Partial			
IB-23	1	Nut, Lock, Contact Screw, Hex., 3.5mm.			
IGP-33 †	1	Contact, Breaker Screw			
IGP-3028 †	1	Arm Assy., Breaker			
IGP-30	1	Spring			
		1 2 3 4 5			

Assembly No.	Shaft & Gov. Assembly	Spring Set Gov. Weight	Shaft Drive	Spacer Cam	Cam & Stop Plate	Spring
IGP-4008A	IGH-2048RA	IGB-252SS	IGH-1048RA	IGK-26	IGP-1023R	IGT-70
IGP-4008B	IGH-2088R	IGB-328KS	IGH-1088R	IGS-99	IGP-1067R	None

(Issued 2-13-46)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4009A, B DISTRIBUTOR PARTS LIST

IGP-4009A, B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	8X-794	1	#10-32 Square Nut
IG-94	9	H. T. Wire Terminal	8X-870	2	#10-32x5/16 Fill. Hd. Screw
*	1	Dist. Gear-Follower	8X-871	1	#10-32x1 3/8 Fill. Hd. Sc.
IG-680	1	Lock Spring Ring	8X-872	1	#10-32x1/4 Fill. Hd. Screw
IG-816	1	Thrust Washer	8X-1063	1	1/4-28 Hex. Nut
IG-860A	1	Hold Down Arm			1 2 3 4 5
IGB-162	1	Thrust Washer			
IGE-35	1	Governor Control Spring			(Issued 10-22-37)
IGH-28	1	Cam Sleeve Felt Wick			
IGH-2026R2	1	Drive Shaft & Gov. Assy.			
IG-884 †	2	Weight Spring			
IG-1456	2	Weight Assy.			
IGH-1026R	1	Drive Shaft Assy.			
IGK-26	1	Washer - .020" Thick			
IGP-1003	1	Dist. Cap Assy.			
IG-514	1	Contact Spring Plunger			
IG-515	1	Contact Spring			
IGP-1016	1	Rotor			
IGP-1023RD	1	Cam & Stop Plate - 8 Cyl. R.H.			
IGP-2004	1	Breaker Plate Assy.			
IA-131	1	Breaker Arm Spring Clip			
IG-2671	1	Condensor Assy.			
IGP-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33 †	1	Breaker Point Screw			
IGP-3028 †	1	Breaker Arm Assy.			
IGP-30	1	Breaker Arm Spring			
X-194	1	#6 Lock Washer			
8X-302	1	#6-32x1/4 Rd. Hd. Screw			
8X-873	1	#6-32x3/16 Fill.Hd. Sc.			
X-1012	1	#6 Lock Washer			
IGP-2035	1	Dist. Base Assy.			
IG-511	1	Name Plate			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
IGP-34	1	Felt Wick			
X-374	2	3/32x1/4 Split Rivet			
X-488	1	1/4 Oiler - Press In Elbow			
X-1448	2	Hinge Pin			
SW-213	1	Distributor Drive Rivet			
X-196	3	#10 Lock Washer			
X-199	1	1/4 Lock Washer			
8X-343	1	1/4-28x5/8 Cap Screw			
		1 2 3 4 5			
			Assy. No.		Gear Follower
			IGP-4009A		IG-261
			IGP-4009B		GK-36

* See table following parts list for part number applying to assembly wanted.

† Service Breaker Point Set IGP-3028BS & Service Weight Spring Set IG-884S.

Printed in U. S. A.

File in
Equipment & Parts Lists Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4401, DISTRIBUTOR PARTS LIST
A & -1

IGP-4401,
A & -1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	1 2 3 4 5 Thrust Washer	*	1	1 2 3 4 5 Drive Shaft & Gov. Assy.
IG-680	1	Lock Spring Ring	*	2	Weight Spring
IGE-162	1	Thrust Washer	IG-1456	2	Weight Assembly
IGE-35	1	Governor Control Spring	IGT-1024R	1	Drive Shaft Assembly
IGH-28	1	Cam Sleeve Felt Wick	SW-213	1	Dist. Drive Rivet
IGK-26	1	Washer - .020" Thick	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IGL-44	1	Dist. Drive Coupling	X-1270	2	#10 Skpf. Washer
IGP-41	1	Terminal Slot Cover			1 2 3 4 5
IGP-1003	1	Dist. Cap Assembly			(Issued 4-12-37)
IG-514	1	Contact Spring Plunger			
IG-515	1	Contact Spring			
IGP-1016	1	Rotor			
IGP-2004B	1	Breaker Plate Assembly			
IA-131	1	Breaker Arm Spring Clip			
IG-3927D	1	Condenser Assembly			
IGP-1004	1	Breaker Plate Part Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Point Screw			
IGP-3028†	1	Breaker Arm Assembly			
IGP-30	1	Breaker Arm Spring			
X-194	1	#6 Lock Washer			
8X-302	1	#6-32x1/4 Rd. Hd. Screw			
8X-873	1	#6-32x3/16 Fill. Hd. Screw			
X-1012	1	#6 Lock Washer			
IGS-21†	1	Advance Pointer			
IGS-1020S†	1	Advance Control Arm Assy.			
IG-8160†	1	Thrust Washer			
8X-135†	1	1/4-20x2 Fill. Hd. Screw			
8X-146†	1	1/4-20 Hex. Nut			
12X-199†	1	1/4 Lock Washer			
*	1	Cam & Stop Plate - 8 cyl. R.H.			
IGT-2001A	1	Dist. Base Assy.			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-382	2	1/8 Grease Cup			
X-1448	2	Hinge Pin			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Cam Assembly	Weight Spring	Weight Sp. Set
IGP-4401	IGT-2024R	IGT-1022RC	IA-77 (2)	IA-77S
IGP-4401A	IGT-2024RA	IGT-1022RD	IG-636 IGB-284 1 ea.	IG-636AS

† Used with assemblies having a suffix "-1".

* See table following parts list for part number applying to assembly wanted. ‡ Service Breaker Point Set IGP-3028A.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4402,-1,A,A-1,B,B-1 DISTRIBUTOR PARTS LIST

IGP-4402,-1,A,
A-1,B,B-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	1 2 3 4 5 Washer, Thrust, Drive Shaft, Lower	*	1	Shaft & Gov. Assy.
IG-680	1	Snap Ring, Cam Retaining	*	1	Spring Set, Gov. Weight
IG-816**	1	Washer, Thrust, Advance Arm	IG-1456	2	Weight, Gov.
IGB-199	1	Collar, Shaft, Dist.	*	1	Shaft, Drive
IGH-28	1	Wick, Felt, Cam Sleeve	SW-213	1	Rivet, Collar, Drive Shaft
IGP-41	1	Cover, Terminal Slot	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
IGP-1003	1	CAP ASSY., DIST.	X-1270	2	Washer, Breaker Plate Mtg., Skpf. #10
IG-514	1	Contact, Plunger			1 2 3 4 5
IG-515A	1	Spring, Contact			
IGP-1016B	1	ROTOR			
IGP-2004B	1	Breaker Plate Assy.			
IA-131	1	Clip, Spring, Contact Arm.			
IB-23	1	Nut, Lock, Contact Screw			
IG-3927K	1	CONDENSER			
IGP-1004S	1	Plate Breaker, Partial			
IGP-3028A	1	CONTACT SET, BREAKER			
X-194	1	Lockwasher, Contact Spring Sc., #6			
8X-302	1	Screw, Contact Spring Rd. Hd. #6-32x1/4			
X-1012	1	Lockwasher, Condenser Mtg., #6			
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IGS-21**	1	Pointer, Advance Arm			
IGS-99	1	Spacer, Cam			
IGS-104	1	Washer, Thrust, Drive Shaft, Upper			
IGS-1020S**	1	Arm, Advance			
IGT-70	1	Spring, Anti-Rattle			
*	1	Cam, & Stop Plate, 8 Cyl., R.H.			
IGT-2001A	1	Base Assy., Dist.			
IG-579A	2	Bearing, Abs. Bronze			
IG-694	2	Spring, Clamp, Cap			
X-382	1	Cup, Grease, 1/8			
X-1448	2	Pin, Hinge, Cap Spring			
		1 2 3 4 5			

** Used with assemblies having the suffix -1.

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Cam & Stop Plate	Shaft & Gov.	Spring Set	Shaft Drive
IGP-4402,-1	IGT-1021RF	IGT-2002RC	IA-77S	IGT-1002RA
IGP-4402A,-1	IGT-1021RG	IGT-2002RG	IG-636AS	IGT-1002RA
IGP-4402B,-1	IGT-1021R	IGT-2072R	IGB-292SS	IGT-1072R

UNIT	APPLICATION
IGP-4402,-1,A,A-1,B,B-1	Chrysler (Marine) Chrysler (Industrial)


(Issued 1-19-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGP-4402,A,B,-1 DISTRIBUTOR PARTS ILLUSTRATION

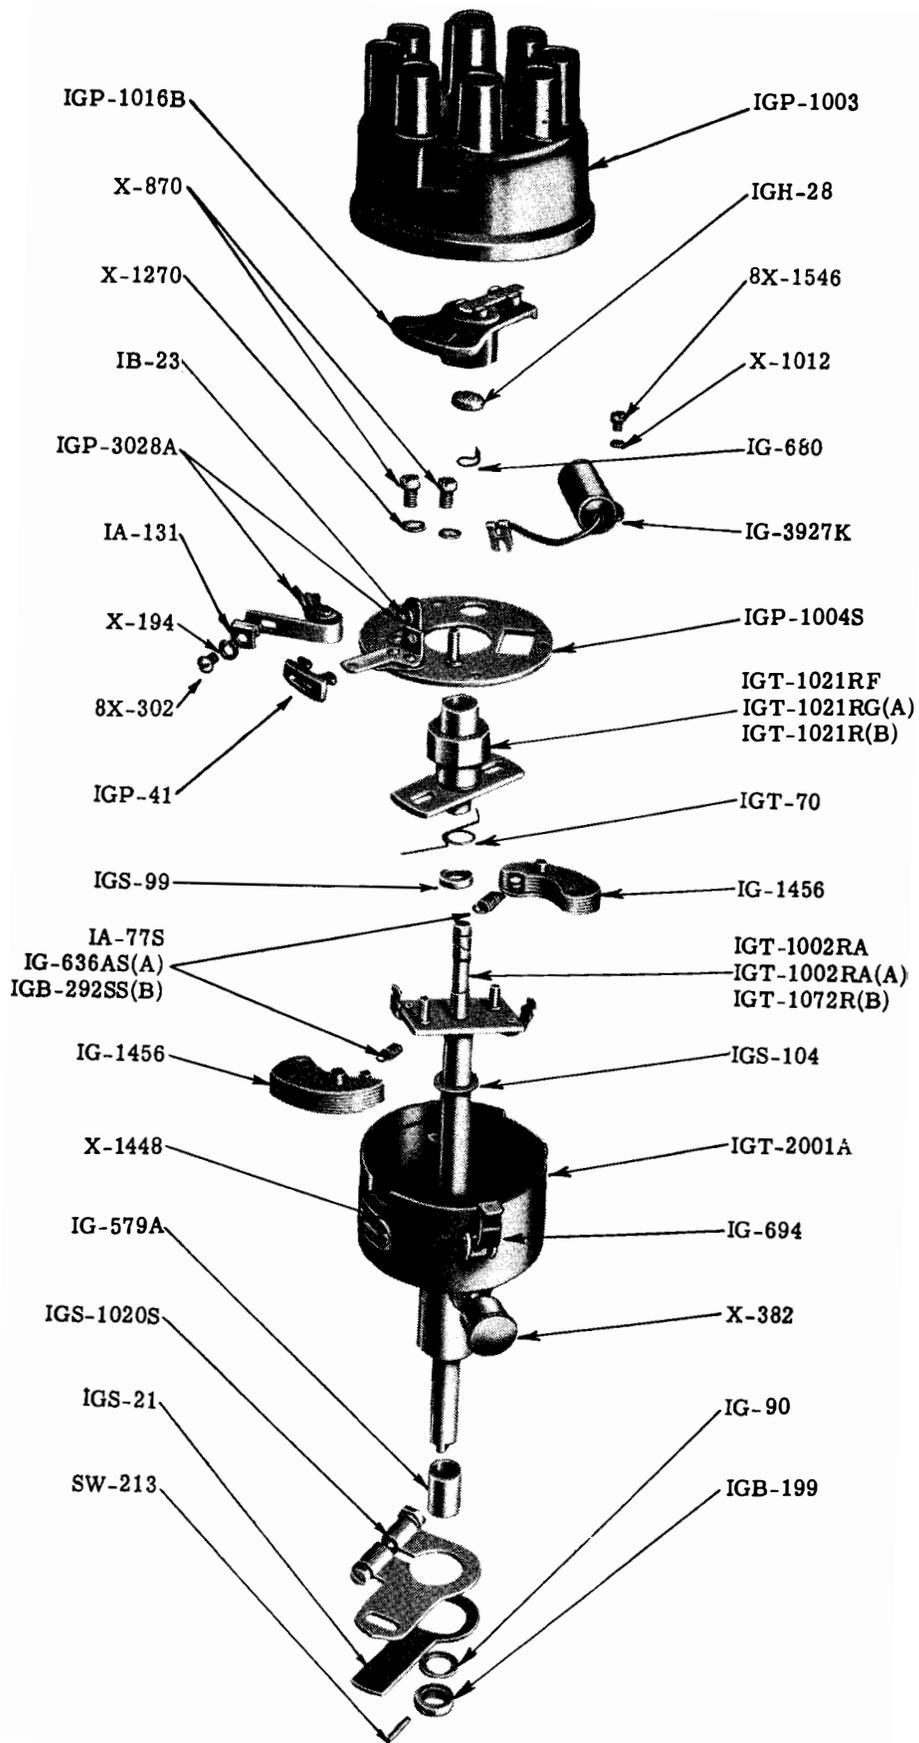

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4501,A DISTRIBUTOR PARTS LIST

IGP-4501,A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	Thrust Washer	IGT-1044	1	Advance Control Arm Assy.
IG-94	9	H. T. Wire Terminal	8X-136	1	1/4-20x1 1/4 Fill. Hd. Sc.
IG-680	1	Lock Spring Ring	12X-199	1	1/4 Lock Washer
IGH-28	1	Cam Sleeve Felt Wick	8X-791	1	1/4-20 Square Nut
IGH-53B	1	Drive Shaft Extension	*	1	Drive Shaft & Gov. Assy.
IGH-54	1	Dist. Drive Sleeve	IG-2456	2	Weight Assembly
IGH-55	1	Drive Shaft Pin	*	2	Weight Spring
IGP-41	1	Terminal Slot Cover	*	1	Drive Shaft Assembly
IGP-1003	1	DISTRIBUTOR CAP ASSEMBLY	SW-213	1	Distributor Drive Rivet
IG-514	1	Contact Spring Plunger	8X-870	2	#10-32x5/16 Fill. Hd. Sc.
IG-515	1	Contact Spring	8X-872	1	#10-32x1/4 Fill. Hd. Screw
IGP-1016B	1	ROTOR	X-1270	3	#10 Skpf. Washer
IGP-2045	1	Distributor Base Assembly			1 2 3 4 5
IG-511	1	Name Plate			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-382	1	1/8 Grease Cup			
X-1201	2	.10x1/4 Tubular Rivet			
X-1448	2	Hinge Pin			
IGP-2046	1	Breaker Plate Assembly			
IA-131	1	Breaker Arm Spring Clip			
IG-2671K	1	CONDENSER ASSEMBLY			
IGP-1046	1	Breaker Plate Part Assy.			
IGP-1047M†	1	Breaker Point			
IGP-3028†	1	Breaker Arm Assembly			
IGP-30	1	Breaker Arm Spring			
8X-59	1	#8-32x3/16 Rd. Hd. Sc.			
8X-302	1	#6-32x1/4 Rd. Hd. Screw			
8X-350	1	#8 Plain Washer			
X-1012	2	#6 Lock Washer			
8X-1546	1	#6-32x5/32 Fill. Hd. Sc.			
IGS-99	1	Washer			
IGS-104	1	Thrust Washer			
IGT-69	1	Governor Control Spring			
*	1	Cam & Stop Plate - 8 Cyl.			
		L. H.			
		1 2 3 4 5			

† Service BREAKER POINT SET IGP-3028KS.

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Cam & Stop Plate	Shaft & Gov. Assy.	Weight Spring	Spring Set	Dr. Shaft Assembly
IGP-4501	IGT-1021LA	IGT-2020LA	IG-829 1 ea.	IG-829AS	IGT-1020LA
IGP-4501A	IGT-1021L	IGT-2020LB	IGB-277 IGB-293 1 ea. IGB-329	IGB-329SS	IGT-1020L



UNIT	APPLICATION
IGP-4501,A	Packard

(Issued 12-7-39)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

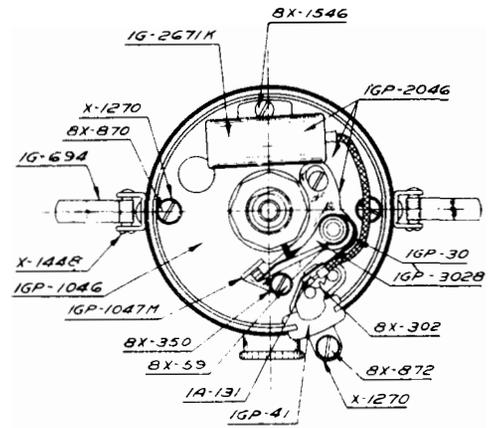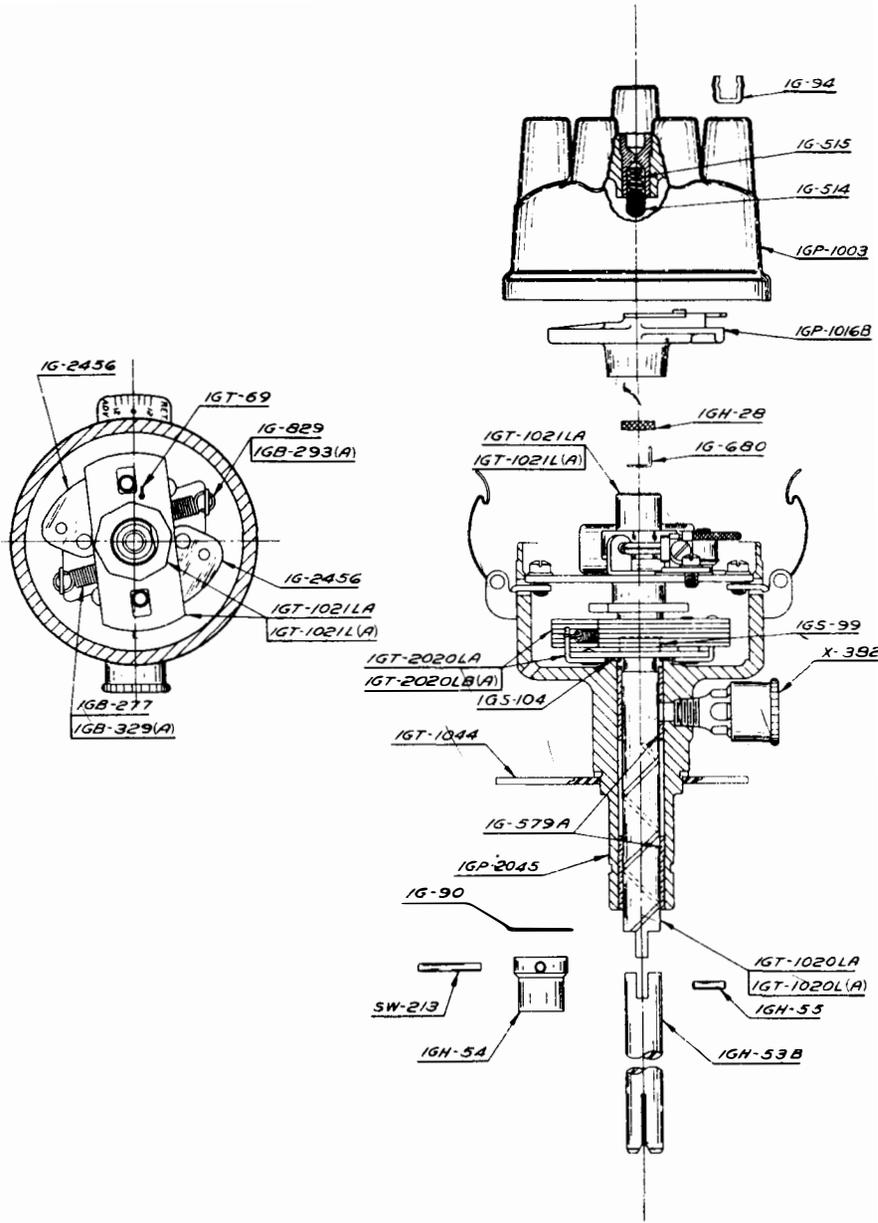

IGP-4501,A DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4502, A, B, C, D, E DISTRIBUTOR PARTS LIST

IGP-4502, A, B, C, D, E
(Issued 11-24-53)

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
DG-107	1	Lead Assembly	IGT-69	1	Spring, Anti-Rattle
IG-90	1	Washer, Thrust, Drive Shaft, Lower	**	1	Shaft, Drive
IG-94	9	Terminal, H. T. Wire	**	1	Cam & Stop Plate, 8 Cyl. L. H.
IG-680	1	Snap Ring, Cam Retaining	IGW-118	1	Link Clip
IG-2456	2	Weight, Governor	IGW-122	1	Clamp, Plunger Link Screw
**	1	Spring Set, Gov. Weight	SW-213	1	Rivet, Collar
IGH-28	1	Wick, Felt, Cam Sleeve	**	1	Gasket
IGH-53B	1	Extension, Drive Shaft	**	1	Plug
IGH-54	1	Collar, Drive Shaft	VC-46	*	Washer, .032" Thick
IGH-55	1	Pin, Drive Shaft	VC-46A	*	Washer, .010" Thick
IGP-41	1	Cover, Terminal Slot	VC-46B	*	Washer, .065" Thick
IGP-1003	1	CAP ASSY., DIST.	VC-94	1	Plunger Screw
IG-514	1	Contact, Plunger	VC-95	1	Plunger Stop
IG-515A	1	Spring, Contact	VC-105	1	Vacuum Chamber Bracket
IGP-1016B	1	ROTOR	VC-106	1	Clamp
IGP-2046	1	Plate Assy., Breaker	**	1	Spring
IA-131	1	Clip, Spring, Contact Arm	**	1	VACUUM CHAMBER
IG-2671K	1	CONDENSER	8X-173	2	Nut, Vacuum Chamber Mtg., Hex. #10-32
IGP-1046	1	Plate, Breaker	12X-195	1	Lockwasher, Vac. Linkage, #8
IGP-3028KS	1	CONTACT SET, BREAKER	12X-196	3	Lockwasher, Vac. Chamber & Brkt. Mtg. Screw, #10
8X-59	1	Screw, Contact Lock, Rd. Hd. #8-32x3/16	8X-870	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
X-194	2	Lockwasher, Contact Spring & Cond. Mtg. Sc., #6	8X-872	1	Screw, Terminal, Fill. Hd. #10-32x1/4
8X-302	1	Screw, Contact Spring, Rd. Hd. #6-32x1/4	8X-884	1	Screw, Vac. Linkage, Fill. Hd. #8-32x3/16
8X-350	1	Washer, Plain, Contact Lock Screw, #8	8X-902	1	Screw Vac. Brkt. Mtg., Fill. Hd. #10-32x3/8
8X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32	X-1270	3	Washer, Skpf., Term. Sc. & Breaker Plate Mtg. Sc., #10
IGP-2054A	1	Base Assy., Dist.	X-1274	1	Washer, Skpf., Link Screw, #10
IG-579A	2	Bearing, Absorbent Bronze			
IG-694	2	Spring, Clamp, Cap			
IGP-57	1	Bracket, Vacuum Control			
X-196	2	Lockwasher, Bracket Mtg. Sc., #10			
X-382	1	Grease Cup, 1/8 Pipe			
8X-870	2	Screw, Bracket Mtg., Fill. Hd. #10-32x5/16			
X-1448	2	Pin, Hinge, Cap Spring			
IGS-99	1	Spacer, Cam			
IGS-104	1	Washer, Thrust, Drive Shaft, Upper			

* Use as required.

** See table following parts list for part number applying to assembly wanted.

(See Reverse Side)

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4502, A, B, C, D, E DISTRIBUTOR PARTS (Cont.)

Assembly No.	Spring Set, Gov. Weight	Shaft, Drive	Cam & Stop Plate
IGP-4502	IGB-329SS	IGT-1020L	IGT-1021L
IGP-4502A	IGB-329SS	IGT-1020L	IGT-1021LB
IGP-4502B	IGB-265BS	IGT-1020LA	IGT-1021LA
IGP-4502C	IGB-265BS	IGT-1020LA	IGT-1021LA
IGP-4502D	IGB-316AS	IGT-1020LA	IGT-1021LA
IGP-4502E	IGB-308BS	IGT-1020LA	IGT-1021LA

Assembly No.	Gasket	Plug	Spring	Vacuum Chamber
IGP-4502	VC-14	VC-15	VC-104	VC-2060G
IGP-4502A	VC-14	VC-15	VC-104	VC-2060G
IGP-4502B	VC-14	VC-15	VC-144	VC-2060N
IGP-4502C	IAT-30	IAT-29	VC-90	VC-2060P
IGP-4502D	IAT-30	IAT-29	VC-90	VC-2060Q
IGP-4502E	IAT-30	IAT-29	VC-169	VC-2060R

UNIT	APPLICATION
IGP-4502, A, B, C, D, E	Packard

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking such parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4504M,-1M DISTRIBUTOR PARTS LIST

IGP-4504M,-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Washer, Thrust, Drive Shaft, Lower	IGT-70	1	Spring, Anti-Rattle
IG-680	1	Snap Ring, Cam Retaining	IGT-1021R-1	1	Cam, & Stop Plate, 8 Cyl. R.H.
*	1	Washer, Thrust, Advance Arm.	IGT-2001B	1	Base Assy., Dist.
IGB-199	1	Collar, Shaft Distributor	IG-579A	2	Bearing, Absorbent Bronze
IGH-28	1	Wick, Felt, Cam Sleeve	IG-694A	2	Spring, Clamp, Cap
IGP-41	1	Cover, Terminal Slot	X-382A	1	Grease Cup, 1/8
IGP-1003	1	CAP ASSY., DIST	8X-2893	2	Pin, Hinge, Cap Spring
IG-514	1	Contact, Plunger	IGT-2072RA	1	Shaft & Gov. Assy.
IG-515A	1	Spring, Contact	IG-1456	2	Weight, Governor
IGP-1016B	1	ROTOR	IGB-292SS	1	Spring Set, Gov. Weight
IGP-2046B	1	Plate Assy., Breaker	IGT-1072RA	1	Shaft, Drive
IG-3927E	1	CONDENSER	SW-213	1	Rivet, Collar, Drive Shaft
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	X-1270	2	Washer, Breaker Plate Mtg., Skpf. #10
IGP-60	1	Clip, Spring, Contact Arm	8X-2896	2	Screw, Breaker Plate Mtg., Fil. Hd. #10-32x5/16
IGP-1046A	1	Plate, Breaker			1 2 3 4 5
IGP-3028WS	1	CONTACT SET, BREAKER			
19X-59	1	Screw, Contact Lock, Rd. Hd. #8-32x 3/16			
19X-350	1	Washer, Plain, Contact Lock Sc., #8			
19X-353	1	Washer, Plain, Clamp Sc., #6			
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
*	1	Pointer, Advance Arm.			
IGS-99	1	Spacer, Cam			
IGS-104	1	Washer, Thrust, Drive Shaft, Upper			
*	1	Arm, Advance			
		1 2 3 4 5			

* See table following parts list for part number applying to assembly wanted.

Assembly No.	Advance Arm	Washer	Pointer
IGP-4504M	None	None	None
IGP -4504-1M	IGS-1020-2	IG-816	IGS-21

UNIT	APPLICATION
IGP-4504M,-1M	Chrysler (Marine)

(Issued 1-19-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."



ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4506-1M DISTRIBUTOR PARTS LIST

IGP-4506-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Washer, Thrust, Drive Shaft, Lower	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IG-680	1	Snap Ring, Cam Retaining	IGS-1020-2	1	Arm, Advance
IG-816	1	Washer, Thrust, Advance Arm	IGT-70	1	Spring, Anti-Rattle
IGB-199	1	Collar, Shaft, Dist.	IGT-1021R-1	1	Cam, & Stop Plate, 8 Cyl. R.H.
IGH-28	1	Wick, Felt, Cam Sleeve	IGT-2072RA	1	Shaft & Gov. Assy.
IGH-30	1	COVER, CAP, DIST.	IG-1456	2	Weight, Governor
IGH-36	1	Nut, Cover, Dist. Cap, #10-32	IGB-292SS	1	Spring Set, Gov. Weight
IGH-1029A	1	CAP ASSY., DIST.	IGT-1072RA	1	Shaft, Drive
IG-514	1	Contact, Plunger	IGT-2079	1	Base Assy., Dist.
IG-515A	1	Spring, Contact	IG-579A	2	Bearing, Abs. Bronze
IGH-1041	1	ROTOR	IG-694A	2	Spring, Cap Clamp
IGP-41	1	Cover, Terminal Slot	X-382A	1	Grease Cup, 1/8
IGP-2046B	1	Plate Assy., Breaker	8X-2893	2	Pin, Hinge Cap Spring
IG-3927E	1	CONDENSER	SW-213	1	Rivet, Collar, Drive Shaft
IGC-175	1	Screw, Spring Clamp, Hex. Hd., #6-32x5/16	X-183A	1	Washer, Cover Nut, Plain #10
IGP-60	1	Clip, Spring, Contact Arm	12X-196	1	Lockwasher, Cover Nut, #10
IGP-1046A	1	Plate, Breaker	X-1270	2	Washer, Breaker Plate Mtg., Skpf. #10
IGP-3028WS	1	CONTACT SET, BREAKER	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-59	1	Screw, Contact Lock, Rd. Hd. #8-32x3/16			1 2 3 4 5
19X-350	1	Washer, Plain, Contact Lock Sc., #8			
19X-353	1	Washer, Plain, Clamp Sc., #6			
12X-1012	2	Lockwasher, Condenser & Clamp Sc., #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
IGS-21	1	Pointer, Advance Arm			
IGS-99	1	Spacer, Cam			
		1 2 3 4 5			

UNIT	APPLICATION
IGP-4506-1M	Chrysler (Marine)

(Issued 1-19-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGP-4507-1M DISTRIBUTOR PARTS LIST

IGP-4507-1M

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Washer, Thrust, Drive Shaft, Lower	IGS-21	1	Pointer, Advance Arm
IG-680	1	Snap Ring, Cam Retaining	IGS-99	1	Spacer, Cam
IG-816C	1	Washer, Thrust, Adv. Arm	IGS-104	1	Washer, Thrust, Drive Shaft, Upper
IGB-199	1	Collar, Shaft, Dist.	IGS-1020-2	1	Arm, Advance
IGH-28	1	Wick, Felt, Cam Sleeve	IGT-70	1	Spring, Anti-Rattle
IGH-30	1	Cover, Cap, Dist.	IGT-1021R-1	1	Cam, & Stop Plate, 8 Cyl., R.H
IGH-36	1	Nut, Cover, Dist. Cap, #10-32	IGT-2072RB	1	Shaft & Gov. Assy.
IGH-1029B	1	Cap Assy., Dist.	IG-1456	2	Weight, Governor
IG-514	1	Contact, Plunger	IGB-292SS	1	Spring Set, Gov. Weight
IG-515A	1	Spring, Contact	IGT-1072RB	1	Shaft, Drive
IGH-1041	1	Rotor	IGT-2094	1	Base Assy., Dist.
IGP-41	1	Cover, Terminal Slot	IG-579A	1	Bearing, Abs. Bronze
IGP-2046B	1	Plate Assy., Breaker	IG-694A	2	Spring, Cap Clamp
IG-3927E	1	Condenser	X-382A	1	Grease Cup
IGC-175	1	Screw, Spring Clamp, Hex. Hd. #6-32x5/16	8X-2893	2	Pin, Cap Spring Hinge
IGP-60	1	Clip, Spring, Contact Arm	SW-213	1	Rivet, Collar, Drive Shaft
IGP-1046A	1	Plate, Breaker	X-183B	1	Washer, Plain, Cover Sc., #10
IGP-3028WS	1	Contact Set, Breaker	12X-196	1	Lockwasher, Cover Screw, #10
19X-59	1	Screw, Contact Lock, Rd. Hd. #8-32x3/16	X-1270	2	Washer, Breaker Plate Mtg., Skpf. #10
19X-350	1	Washer, Plain, Contact Lock Sc., #8	X-2896	2	Screw, Breaker Plate Mtg., Fill. Hd. #10-32x5/16
19X-353	1	Washer, Plain, Clamp Sc., #6			1 2 3 4 5
12 X-1012	2	Lockwasher, Condenser & Clamp Sc., #6			
19X-1546	1	Screw, Condenser Mtg., Fill. Hd. #6-32x5/32			
		1 2 3 4 5			

UNIT	APPLICATION
IGP-4507-1M	Chrysler Marine

(Issued 1-27-48)

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4001,A,-1 DISTRIBUTOR PARTS LIST

IGS-4001,A,-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGS-2028	1	Distributor Base Assembly
IG-680	1	Insulating Bushing	IG-579A	2	Absorbent Bronze Brg.
IGB-162	1	Thrust Washer	IG-694	2	Dist. Cap Spring
IGC-1107S	1	DISTRIBUTOR CAP ASSEMBLY	X-382	1	1/8 Grease Cup
IG-514	1	Contact Spring Plunger	X-1448	2	Hinge Pin
IG-515	1	Contact Spring	SW-213	1	Distributor Drive Rivet
IGS-32	1	Rubber Plug	8X-311	2	#10-32x3/8 Rd. Hd. Screw
IGE-35	1	Governor Control Spring	8X-321	2	#10-32x5/16 Rd. Hd. Screw
IGH-28	1	Cam Sleeve Felt Wick	8X-870	2	#10-32x5/16 Fill. Hd. Sc.
IGK-26	1	Washer - .020" Thick	X-1270	6	#10 Skpf. Washer
IGS-18	2	Bearing Clamp			1 2 3 4 5
IGS-19S	1	Drive Shaft Collar			
IGS-21†	1	Advance Pointer			
IGS-23	1	Vacuum Chamber Bracket			(Issued. 7-30-40)
IGS-34	1	Terminal Slot Cover			
IGS-1016	1	ROTOR			
IGS-1022R	1	Cam & Stop Plate - 6 Cyl. R.H.			
*	1	Vacuum Chamber Assembly			
VC-14	1	Gasket - 1/32" Thick			
VC-15	1	Plug			
VC-46	+	Washer - .032" Thick			
VC-46A	+	Washer - .010" Thick			
VC-46B	+	Washer - .065" Thick			
*	1	Spring			
IGS-1027S†	1	Advance Control Arm Assy.			
*	1	Drive Shaft & Gov. Assy.			
IG-1456	2	Weight Assembly			
*	1	Weight Spring Set			
IGS-1002R	1	Drive Shaft Assembly			
IGS-2004A	1	Breaker Plate Assembly			
		± Identified by 8			
IA-131	1	Breaker Arm Spring Clip			
IG-3927A	1	CONDENSER ASSEMBLY			
IGE-15	1	#6 Plain Washer			
IGP-3028†	1	Breaker Arm Assembly			
IGP-30	1	Breaker Arm Spring			
IGS-59A	1	Lead Assembly			
IGS-55	1	Terminal			
X-936	1	Terminal			
IGS-1004A	1	Breaker Plate Part Assy.			
IGS-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Screw Point			
IGS-73S	1	Lead Assembly			
IGS-56	1	Terminal			
8X-323	1	#6-32x5/16 Rd. Hd. Screw			
X-1012	3	#6 Lock Washer			
8X-1546	3	#6-32x5/32 Fill. Hd. Sc.			
	1	2 3 4 5			

† Used with assemblies having the suffix "-1".

* See table following parts list for part number applying to assembly wanted.

+ Use as required.

± See Manual Bulletin IG-11.

† SERVICE BREAKER POINT SET IGP-3028A.

Assembly No.	Dr. Shaft & Gov.	Spring Set	Vacuum Chamber	Spring
IGS-4001	IGS-2002R	IGB-208S	IGS-1023S	VC-49 (Blue)
IGS-4001A	IGS-2002RB	IGB-284CS	IGS-1023AS	VC-45 (Red)


UNIT	APPLICATION
IGS-4001, A,-1	Chrysler

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGS-4001A-1 DISTRIBUTOR ILLUSTRATION

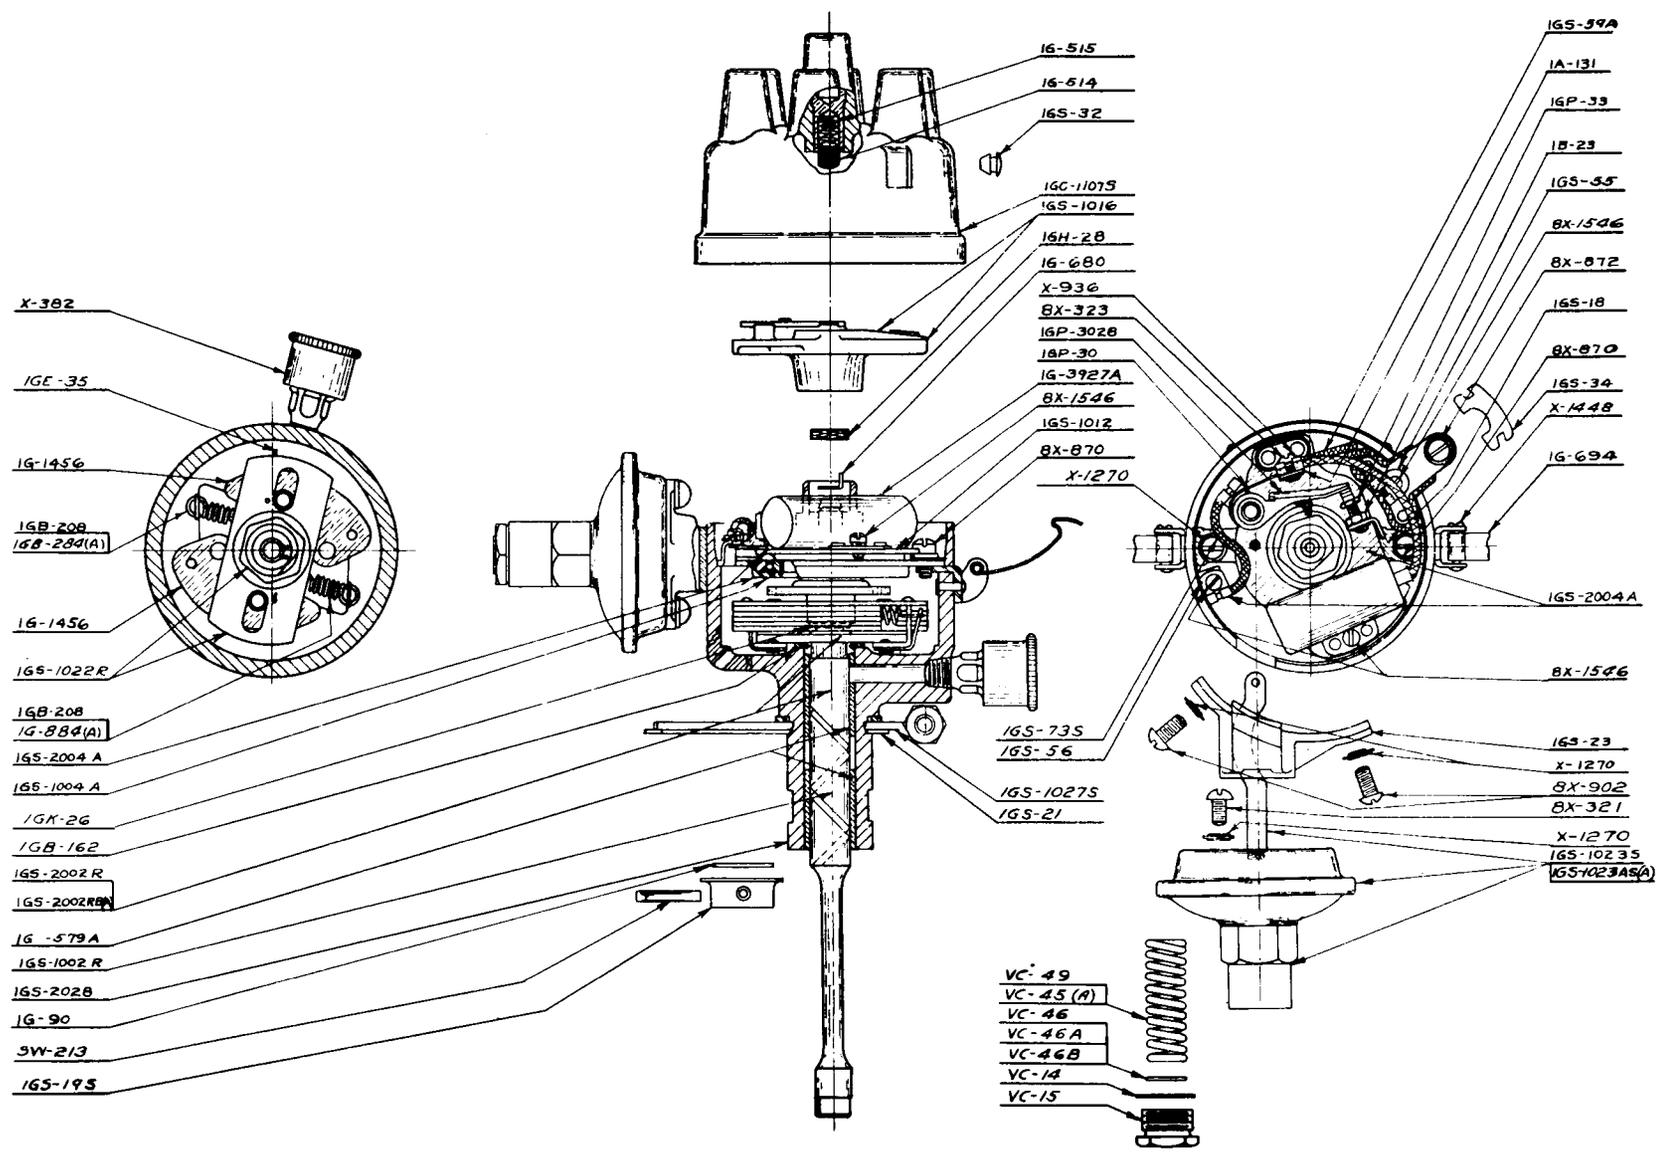

- X-382
- 1GE-35
- 1G-1456
- 1GB-208
1GB-284(A)
- 1G-1456
- 1GS-1022R
- 1GB-208
1G-884(A)
- 1GS-2004 A
- 1GS-1004 A
- 1GX-26
- 1GB-162
- 1GS-2002 R
- 1GS-2002R
- 1G-579A
- 1GS-1002 R
- 1GS-2028
- 1G-90
- 3W-213
- 1GS-195

- 1G-515
- 1G-514
- 1GS-32
- 1GC-11075
- 1GS-1016
- 1GH-28
- 1G-680
- X-936
- 8X-323
- 1GP-3028
- 1BP-30
- 1G-3927A
- 8X-1546
- 1GS-1012
- 8X-870
- X-1270

- 1GS-73S
- 1GS-56
- 1GS-1027S
- 1GS-21
- VC-49
- VC-45(A)
- VC-46
- VC-46A
- VC-46B
- VC-14
- VC-15

- 1GS-39A
- 1A-131
- 1GP-33
- 1B-23
- 1GS-55
- 8X-1546
- 8X-872
- 1GS-18
- 8X-870
- 1GS-34
- X-1448
- 1G-694
- 1GS-2004A
- 8X-1546
- 1GS-23
- X-1270
- 8X-902
- 8X-321
- X-1270
- 1GS-10235
- 1GS-1023AS(A)

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4002, DISTRIBUTOR PARTS LIST
A & -1

IGS-4002,
A & -1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	8X-323	1	#6-32x5/16 Rd. Hd. Screw
IG-680	1	Lock Spring Ring	8X-873	3	#6-32x3/16 Fill. Hd. Sc.
IGB-162	1	Thrust Washer	X-1012	4	#6 Lock Washer
IGC-1107S	1	Dist. Cap Assy.	*	1	Drive Shaft & Gov. Assy.
IG-514	1	Contact Spring Plunger	IG-1456	2	Weight Assembly
IG-515	1	Contact Spring	*	2	Weight Spring
IGS-32	1	Rubber Plug	*	1	Drive Shaft Assy.
*	1	Governor Control Spring	SW-213	1	Dist. Drive Rivet
IGH-28	1	Cam Sleeve Felt Wick	8X-311	2	#10-32x3/8 Rd. Hd. Screw
IGK-26	1	Washer - .020" Thick	8X-321	2	#10-32x5/16 Rd. Hd. Screw
IGS-18	2	Bearing Clamp	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IGS-19	1	Drive Shaft Collar	X-1270	6	#10 Skpf. Washer
IGS-23	1	Vacuum Chamber Bracket			1 2 3 4 5
IGS-34	1	Terminal Slot Cover			(Issued 10-7-37)
IGS-1016	1	Rotor			
*	1	Cam & Stop Plate - 6 cyl. R.H.			
IGS-1023S	1	Vacuum Chamber			
IGS-1027S†	1	Advance Control Arm Assy.			
IG-816C†	1	Thrust Washer			
8X-135†	1	1/4-20x2 Fill. Hd. So.			
8X-146†	1	1/4-20 Hex. Nut			
12X-199†	1	1/4 Lock Washer			
IGS-2001	1	Dist. Base Assembly			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-382	1	1/8 Grease Cup			
X-1448	2	Hinge Pin			
IGS-2004A	1	Breaker Plate Assy.			
IA-131	1	Breaker Arm Spring Clip			
IG-3927A	1	Condenser Assy.			
IGP-3028†	1	Breaker Arm Assy.			
IGP-30	1	Breaker Arm Spring			
IGS-59A	1	Lead Assembly			
IGS-55	1	Terminal			
X-936	1	Terminal			
IGS-1004A	1	Breaker Plate Part Assy.			
IGS-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Point Screw			
IGS-56	1	Terminal			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Dr. Shaft Assy.	Cam Assembly	Weight Spring	Weight Sp. Set	Control Spring
IGS-4002	IGS-2024R	IGS-1024R	IGS-1022R	IGB-284 (2)	IGB-284S	IGE-35
IGS-4002A	IGS-2024RD	IGS-1024RA	IGS-1022RH	IG-636 IGB-292 1 ea.	IGB-292SS	None

* See table following parts list for part number applying to assembly wanted.

† Used with assemblies having a suffix "-1".


‡ Service Breaker Point Set IGP-3028A.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGS-4002,A & -1 DISTRIBUTOR ILLUSTRATION

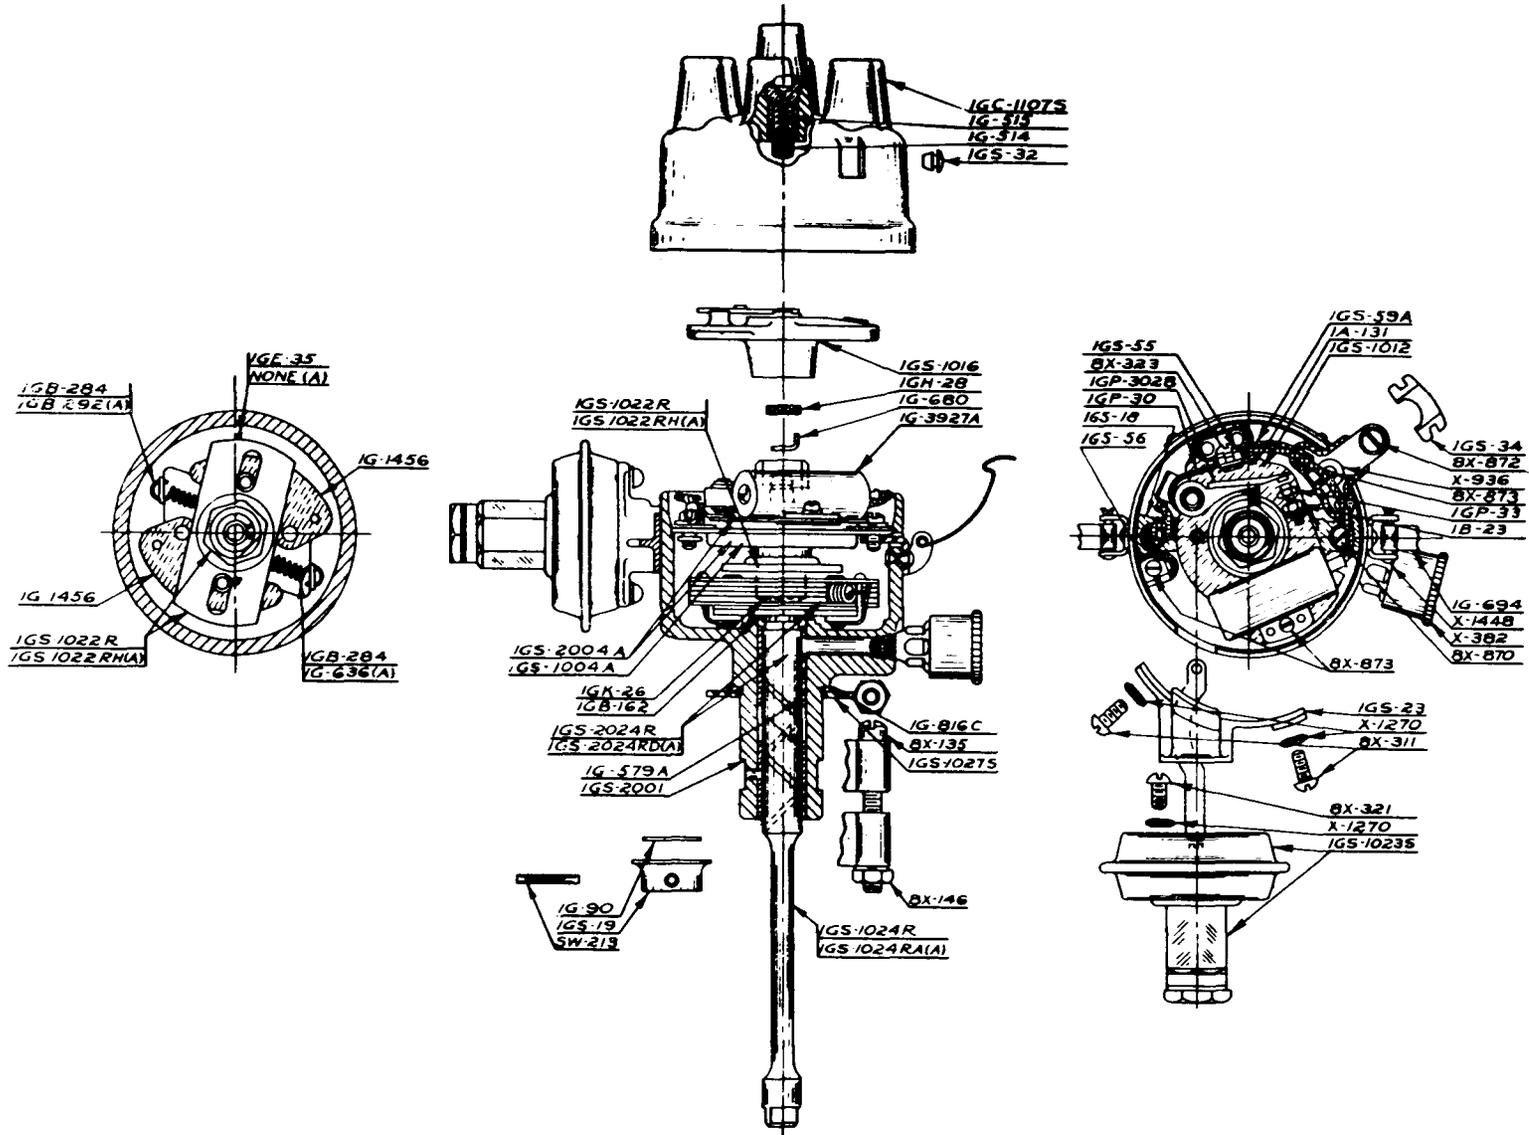

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4003,A, DISTRIBUTOR PARTS LIST
B,C & -1

IGS-4003,A,
B,C & -1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGS-59A	1	Lead Assembly
IG-680	1	Lock Spring Ring	IGS-55	1	Terminal
IGB-162	1	Thrust Washer	X-936	1	Terminal
IGC-1107S	1	Dist. Cap Assy.	IGS-1004	1	Breaker Plate Part Assy.
IG-514	1	Contact Spring Plunger	IGS-1012	1	Breaker Sub Plate Assy.
IG-515	1	Contact Spring	IB-23	1	Breaker Point Lock Nut
IGS-32	1	Rubber Plug	IGP-33†	1	Breaker Screw Point
*	1	Governor Control Spring	IGS-56	1	Terminal
IGH-28	1	Cam Sleeve Felt Wick	8X-323	1	#6-32x5/16 Rd. Hd. Screw
IGK-26	1	Washer - .020" Thick	8X-873	3	#6-32x3/16 Fill. Hd. Sc.
IGS-18	2	Bearing Clamp	X-1012	4	#6 Lock Washer
IGS-19	1	Drive Shaft Collar	*	1	Drive Shaft & Gov. Assy.
IGS-23	1	Vacuum Chamber Bracket	*	2	Weight Spring
IGS-34	1	Terminal Slot Cover	IG-1456	2	Weight Assembly
IGS-1016	1	Rotor	*	1	Drive Shaft Assembly
*	1	Cam & Stop Plate - 6 cyl. R.H.	SW-213	1	Dist. Drive Rivet
*	1	Vacuum Chamber	8X-311	2	#10-32x3/8 Rd. Hd. Screw
IGS-1027S†	1	Advance Control Arm Assy.	8X-321	2	#10-32x5/16 Rd. Hd. Screw
IG-816C†	1	Thrust Washer	8X-870	2	#10-32x5/16 Fill. Hd. Screw
8X-135†	1	1/4-20x2 Fill. Hd. Sc.	X-1270	6	#10 Skpf. Washer
8X-146†	1	1/4-20 Hex. Nut			1 2 3 4 5
12X-199†	1	1/4 Lock Washer			(Issued 10-8-37)
IGS-2001	1	Dist. Base Assembly			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-382	1	1/8 Grease Cup			
X-1448	2	Hinge Pin			
IGS-2004	1	Breaker Plate Assy.			
IA-131	1	Breaker Arm Spring Clip			
IG-3927A	1	Condenser Assy.			
IGP-3028†	1	Breaker Arm Assy.			
IGP-30	1	Breaker Arm Spring			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Dr. Shaft Assy.	Cam Assembly	Weight Spring	Weight Sp. Set	Control Spring	Vacuum Chamber
IGS-4003	IGS-2025R	IGS-1025R	IGS-1022RA	IGB-265 (2)	IGB-265S	IGE-35	IGS-1023CS
IGS-4003A	IGS-2025RC	IGS-1025RB	IGS-1022RG	IG-636 IGB-292 1 ea.	IGB-292SS	None	IGS-1023CS
IGS-4003B	IGS-2025RD	IGS-1025RB	IGS-1022RG	IG-636 IGB-278 1 ea.	IG-636SS	None	IGS-1023CS
IGS-4003C	IGS-2025RE	IGS-1025R	IGS-1022R	IGB-208 (2)	IGB-208S	IGE-35	IGS-1023DS

* See table following parts list for part number applying to assembly wanted. † Used with assemblies having a suffix "-1". ‡ Service Breaker Point Set IGP-3028A.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4006, DISTRIBUTOR PARTS LIST
A & -1

IGS-4006,
A & -1

Part No.	No. Used	Name of Part					Part No.	No. Used	Name of Part											
		1	2	3	4	5			1	2	3	4	5							
IG-90	1						1													
IG-680	1						1													
IGB-162	1						2													
IGC-1107S	1						1													
IG-514	1						1													
IG-515	1						2													
IGS-32	1						1													
*	1						*													
IGH-28	1						2													
IGK-26	1						1													
IGS-18	2						2													
IGS-19	1						1													
IGS-21†	1						2													
IGS-23	1						2													
IGS-24	1						6													
IGS-1016	1						1													
IGS-1020S†	1						1													
IG-816C†	1						1													
8X-135†	1						1													
8X-146†	1						1													
12X-199†	1						1													
*	1						1													
IGS-1023AS	1						1													
IGS-2004A	1						1													
IA-131	1						1													
IG-3927A	1						1													
IGP-3028†	1						1													
IGP-30	1						1													
IGS-59A	1						1													
IGS-55	1						1													
X-936	1						1													
IGS-1004A	1						1													
IGS-1012	1						1													
IB-23	1						1													
IGP-33†	1						1													
8X-323	1						1													
8X-873	3						3													
X-1012	4						4													
							1													
							2													
							3													
							4													
							5													

(Issued 9-1-37)

Assembly No.	Dr. Shaft & Gov.	Dr. Shaft Assy.	Cam Assembly	Weight Spring	Weight Sp. Set	Control Spring
IGS-4006	IGS-2042R	IGS-1042R	IGS-1022R	IGB-284 (2)	IGB-284S	IGE-55
IGS-4006A	IGS-2042RB	IGS-1042RA	IGS-1022RH	IG-656 1 ea.	IGB-292SS	None
				IGB-292		


NOTE:- See table following parts list for part number applying to assembly wanted.

† Used with assemblies having a suffix "-1". ‡ Service Breaker Point Set IGP-3028A.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

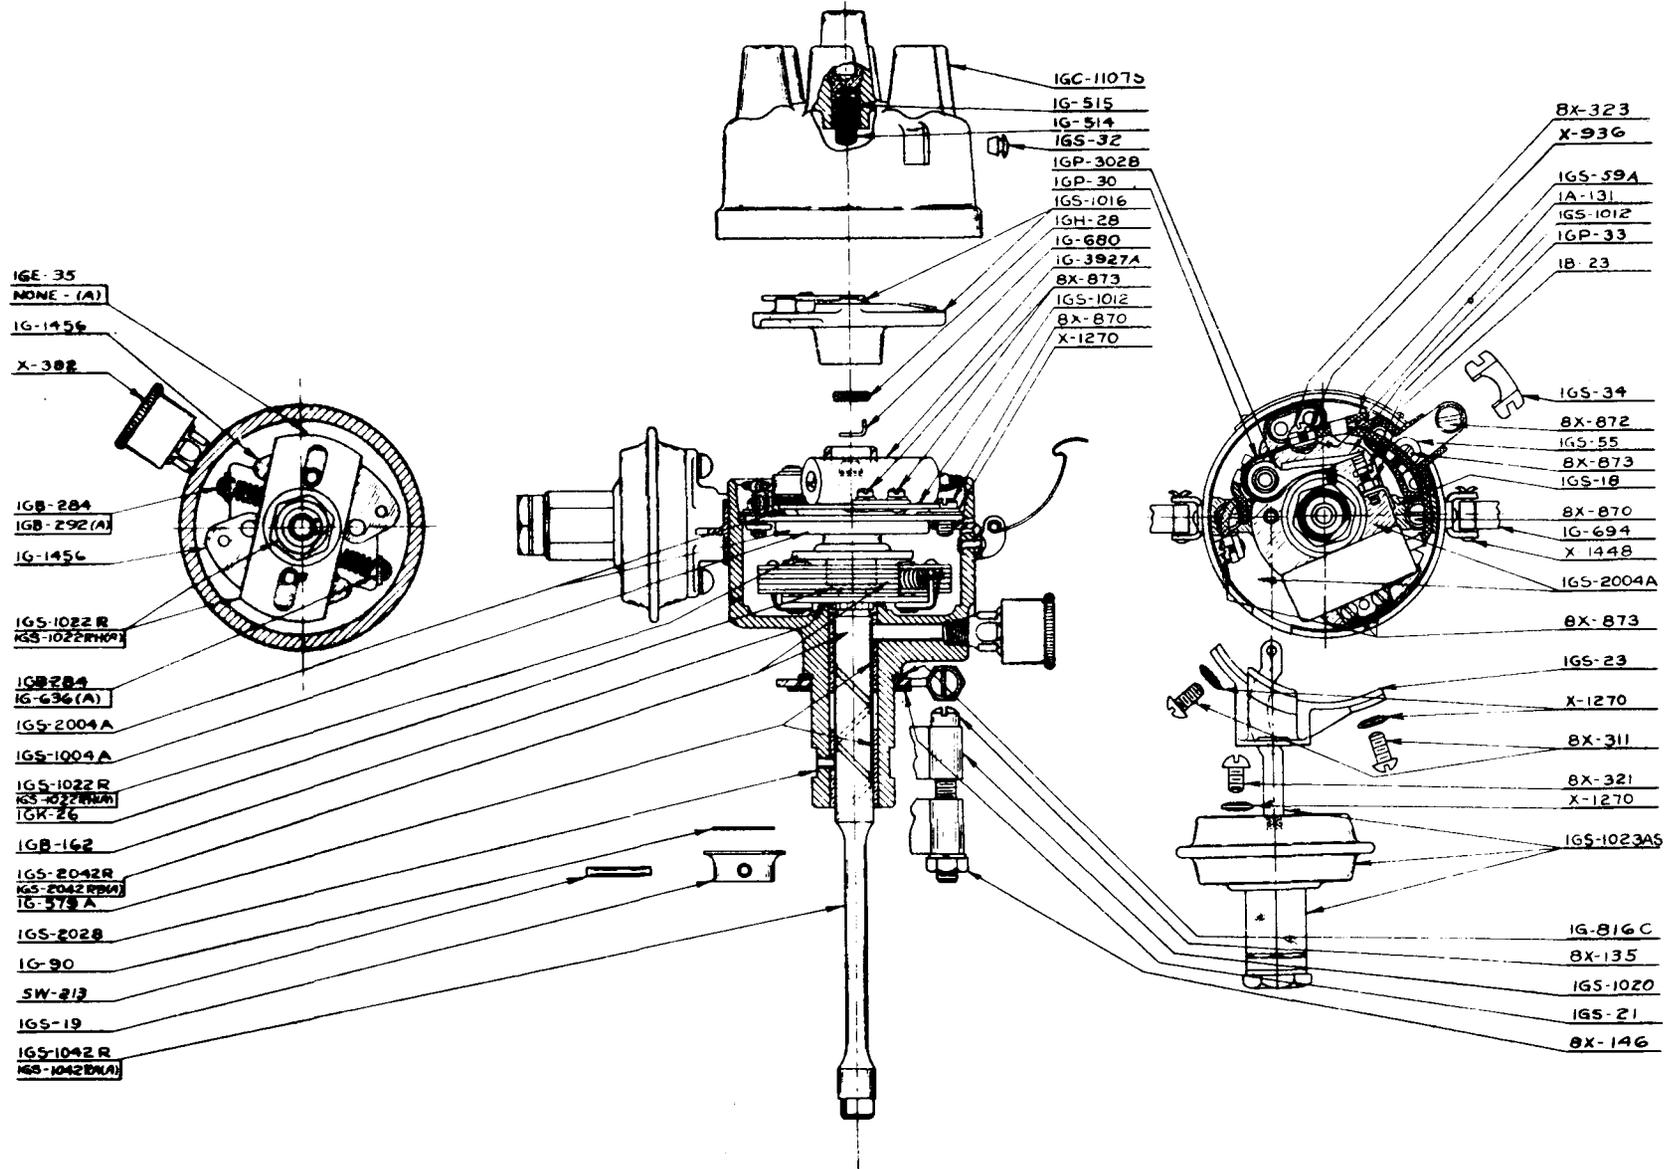

IGS-4006A & -1 DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4007, DISTRIBUTOR PARTS LIST
A,B

IGS-4007,
A,B

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	*	1	Drive Shaft & Gov. Assy.
IG-94	5	H. T. Wire Terminal	IG-2456	2	Weight Assy.
IG-680	1	Lock Spring Ring	*	2	Weight Spring
IG-816A	1	Thrust Washer	*	1	Drive Shaft Assy.
IG-1324	1	Dist. Cap Assy.	IGS-2047	1	Dist. Base Assy.
IG-514	1	Contact Spring Plunger	IG-511	1	Name Plate
IG-515	1	Contact Spring	IG-579A	2	Absorbent Bronze Brg.
IG-1657	1	Rotor	IG-694	2	Dist. Cap Spring
IG-162	1	Thrust Washer	X-382	1	1/8 Grease Cup
IG-199	1	Dist. Shaft Collar	X-1201	2	.10x1/4 Tubular Rivet
*	1	Cam & Stop Plate - 4 Cyl.L.E.	X-1448	2	Hinge Pin
IG-36	1	Governor Control Spring	*	1	Vacuum Chamber Assy.
IG-28	1	Cam Sleeve Felt Wick	VC-14	1	Gasket - 1/32" Thick
IGK-26	1	Washer - .020" Thick	VC-15	1	Plug
IGS-18	2	Bearing Clamp	*	1	Spring
IGS-34	1	Terminal Slot Cover	VC-46	+	Washer - .032" Thick
IGS-50	1	Vacuum Chamber Bracket	VC-46A	+	Washer - .010" Thick
IGS-1080	1	Advance Control Arm Assy.	VC-46B	+	Washer - .065" Thick
8X-146	1	1/4-20 Hex. Nut	SV-213	1	Dist. Drive Rivet
X-199	1	1/4 Lock Washer	X-196	1	#10 Lock Washer
8X-829	1	1/4-20x1 3/4 Hex. Hd. Sc.	8X-309	2	#10-32x1/2 Rd. Hd. Screw
*	1	Breaker Plate Assy.	8X-321	2	#10-32x5/16 Rd. Hd. Screw
IA-131	1	Breaker Arm Spring Clip	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IG-2671K	1	Condenser Assy.	8X-872	1	#10-32x1/4 Fill. Hd. Screw
IGP-3028L†	1	Breaker Arm Assy.	X-1270	6	#10 Skpf. Washer
IGP-30L	1	Breaker Arm Spring			1 2 3 4 5
IGS-78	1	Lead Assy.			
IGS-77	1	Terminal			(Issued 11-17-38)
X-1484	1	Terminal			
*	1	Breaker Plate Part Assy.			
IGS-1046	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Point Screw			
IGS-76S	1	Lead Assy.			
IGS-74	1	Terminal			
8X-323	1	#6-32x5/16 Rd. Hd. Sc.			
8X-873	3	#6-32x3/16 Fill. Hd. Sc.			
X-1012	4	#6 Lock Washer			
		1 2 3 4 5			

Assy. No.	Cam Assy.	Breaker Plate Assy.	Brkr. Plate Part Assy.	Drive Shaft & Gov. Assy.	Weight Spring
IGS-4007	IGC-1132L	IGS-2044	IGS-1044	IGS-2045L	IGB-284 (2)
IGS-4007A	IGC-1132L	IGS-2044	IGS-1044	IGS-2045LA	IGB-293 (1 ea.)
IGS-4007B	IGC-1132LA	IGS-2044D	IGS-1044D	IGS-2045LB	IG-636 IG-884 (2)
Assy. No.	Weight Spring Set	Drive Shaft Assy.	Vacuum Chamber Assy.	Spring	
IGS-4007	IGB-284S	IGS-1045L	IGT-1028AS	VC-45 (Red)	
IGS-4007A	IG-636GS	IGS-1045LA	IGT-1028AS	VC-45 (Red)	
IGS-4007B	IG-884S	IGS-1045LA	IGT-1028ES	VC-73 (Maroon)	

† Service Breaker Point Set IGP-3028LS.


+ Use as required.

* See table following parts list for part number applying to assembly wanted.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

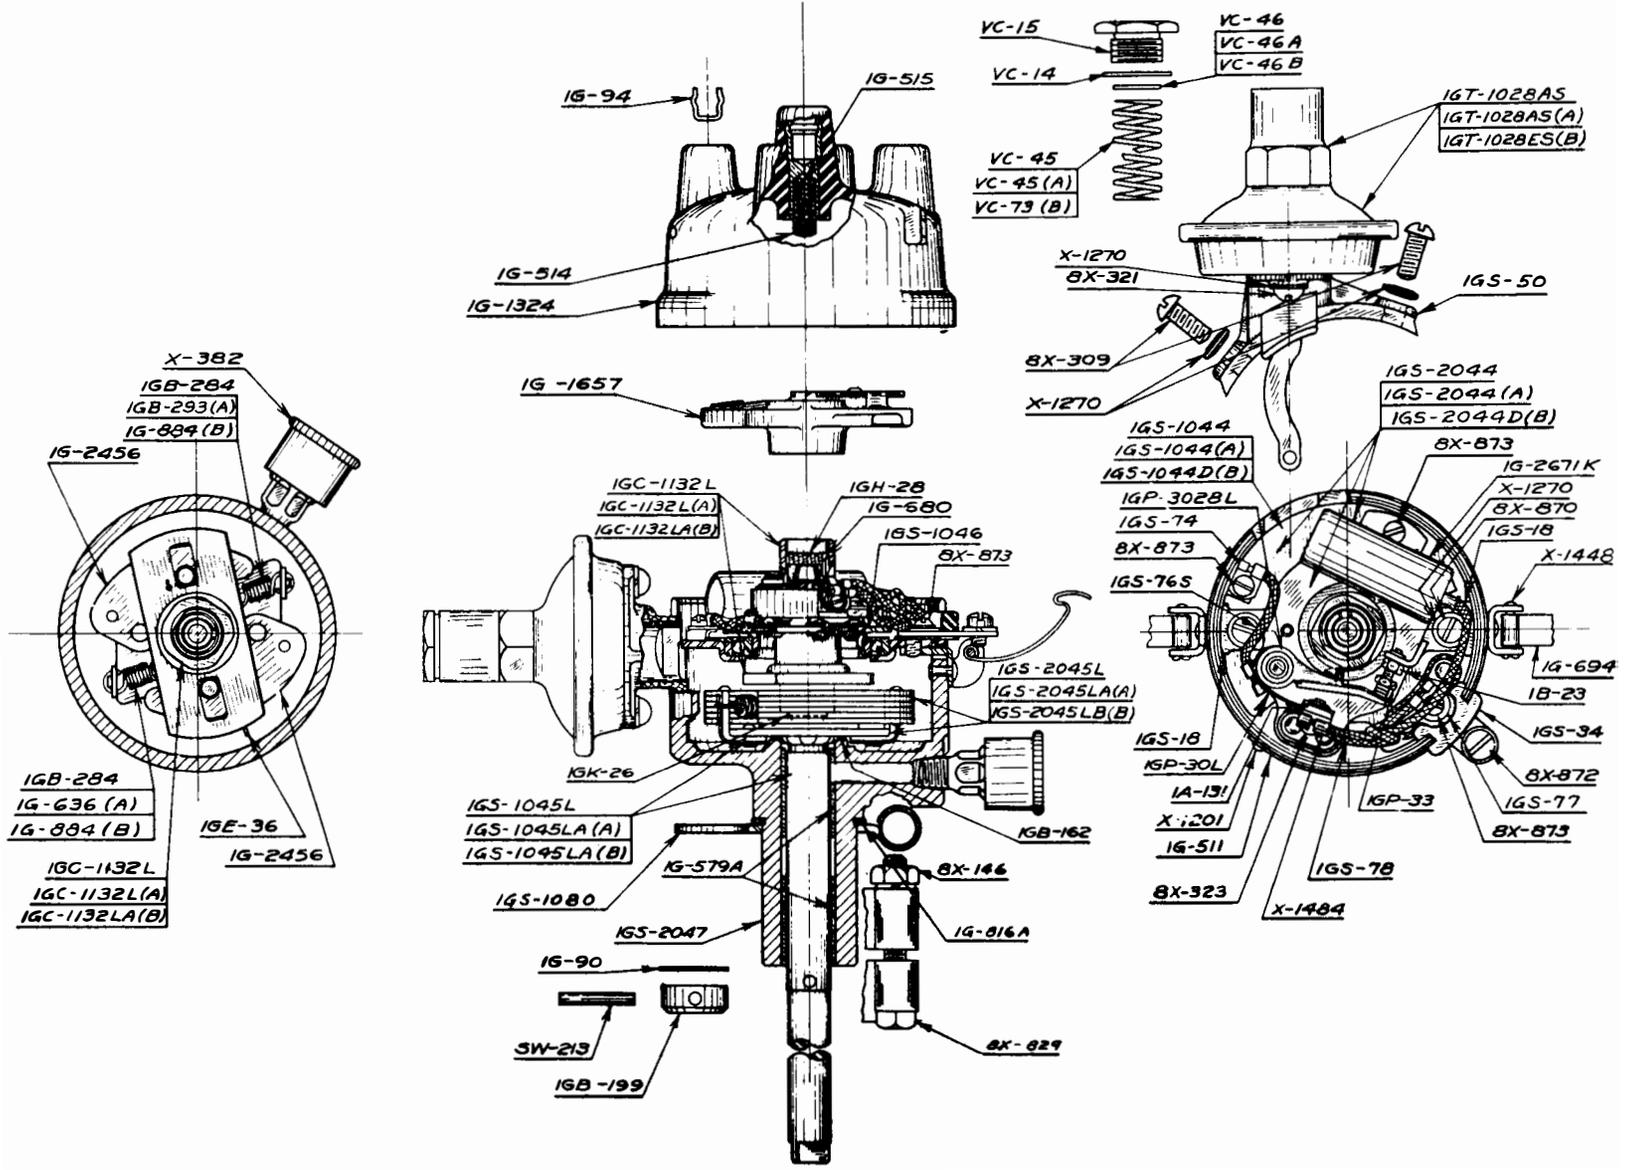

IGS-4007,A,B DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4008,A DISTRIBUTOR PARTS LIST

IGS-4008,A

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
GE-47	1	Tachometer Gear - Driver	IGS-2035	1	Dist. Base Assembly
GE-48	1	TACHOMETER GEAR - FOLLOWER	IG-579A	2	Absorbent Bronze Brg.
IG-90	2	Thrust Washer	IG-694	2	Dist. Cap Spring
IG-680	1	Lock Spring Ring	X-382	1	1/8 Grease Cup
IGB-247	1	Dist. Drive Rivet	X-1448	2	Hinge Pin
IGC-1107S	1	DISTRIBUTOR CAP ASSY.	*	1	Drive Shaft & Gov. Assy.
IG-514	1	Contact Spring Plunger	IG-1456	2	Weight Assy.
IG-515	1	Contact Spring	*	2	Weight Spring
IGS-32	1	Rubber Plug	*	1	Drive Shaft Assy.
*	1	Governor Control Spring	SW-213	1	Dist. Drive Rivet
IGH-28	1	Cam Sleeve Felt Wick	X-294	1	Ball Brg. - S.A.E. #202
IGK-26	1	Washer - .020" Thick	X-311	2	#10-32x3/8 Rd. Hd. Sc.
IGS-18	2	Bearing Clamp	8X-321	2	#10-32x5/16 Rd. Hd. Sc.
IGS-19	1	Drive Shaft Collar	8X-870	2	#10-32x5/16 Fill. Hd. Sc.
IGS-23	1	Vacuum Chamber Bracket	X-1270	6	#10 Skpf. Washer
IGS-34	1	Terminal Slot Cover			1 2 3 4 5
IGS-37	1	Tachometer Drive Shaft			
IGS-38	1	Housing Cover			
IGS-39	1	Thrust Washer			
IGS-1016	1	ROTOR			(Issued 2-1-40)
*	1	Cam & Stop Plate - 6 Cyl.R.H.			
IGS-1023AS	1	Vacuum Chamber Assembly			
VC-14	1	Gasket - 1/32" Thick			
VC-15	1	Plug			
VC-46	+	Washer - .032" Thick			
VC-46A	+	Washer - .010" Thick			
VC-46B	+	Washer - .065" Thick			
VC-45	1	Spring (Red)			
IGS-2004A	1	Breaker Plate Assy.			
		± Identified by 8.			
IA-131	1	Breaker Arm Spring Clip			+ Use as required.
IG-3927A	1	CONDENSER ASSEMBLY			* See table following parts list for part number applying to assembly wanted.
IGP-3028†	1	Breaker Arm Assembly			± See Manual Bulletin IG-11.
IGP-30	1	Breaker Arm Spring			‡ SERVICE BREAKER POINT SET IGP-3028A.
IGS-59A	1	Lead Assembly			
IGS-55	1	Terminal			
X-936	1	Terminal			
IGS-1004A	1	Breaker Plate Part Assy.			
IGS-1012	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33†	1	Breaker Point Screw			
IGS-73S	1	Lead Assembly			
IGS-56	1	Terminal			
8X-323	1	#6-32x5/16 Rd. Hd. Sc.			
X-1012	4	#6 Lock Washer			
8X-1546	3	#6-32x5/32 Fill. Hd. Sc.			
		1 2 3 4 5			

Assembly No.	Dr. Shaft & Gov.	Dr. Shaft Assy.	Control Spring	Cam Assembly	Weight Spring	Weight Sp. Set
IGS-4008	IGS-2051R	IGS-1051R	IGE-35	IGS-1022R	IGB-284 (2)	IGB-284S
IGS-4008A	IGS-2051RA	IGS-1051RA	None	IGS-1022RH	IG-636 1 ea. IGB-292	IGB-292SS


UNIT	APPLICATION
IGS-4008,A	DeSoto

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

IGS-4008,A DISTRIBUTOR ILLUSTRATION

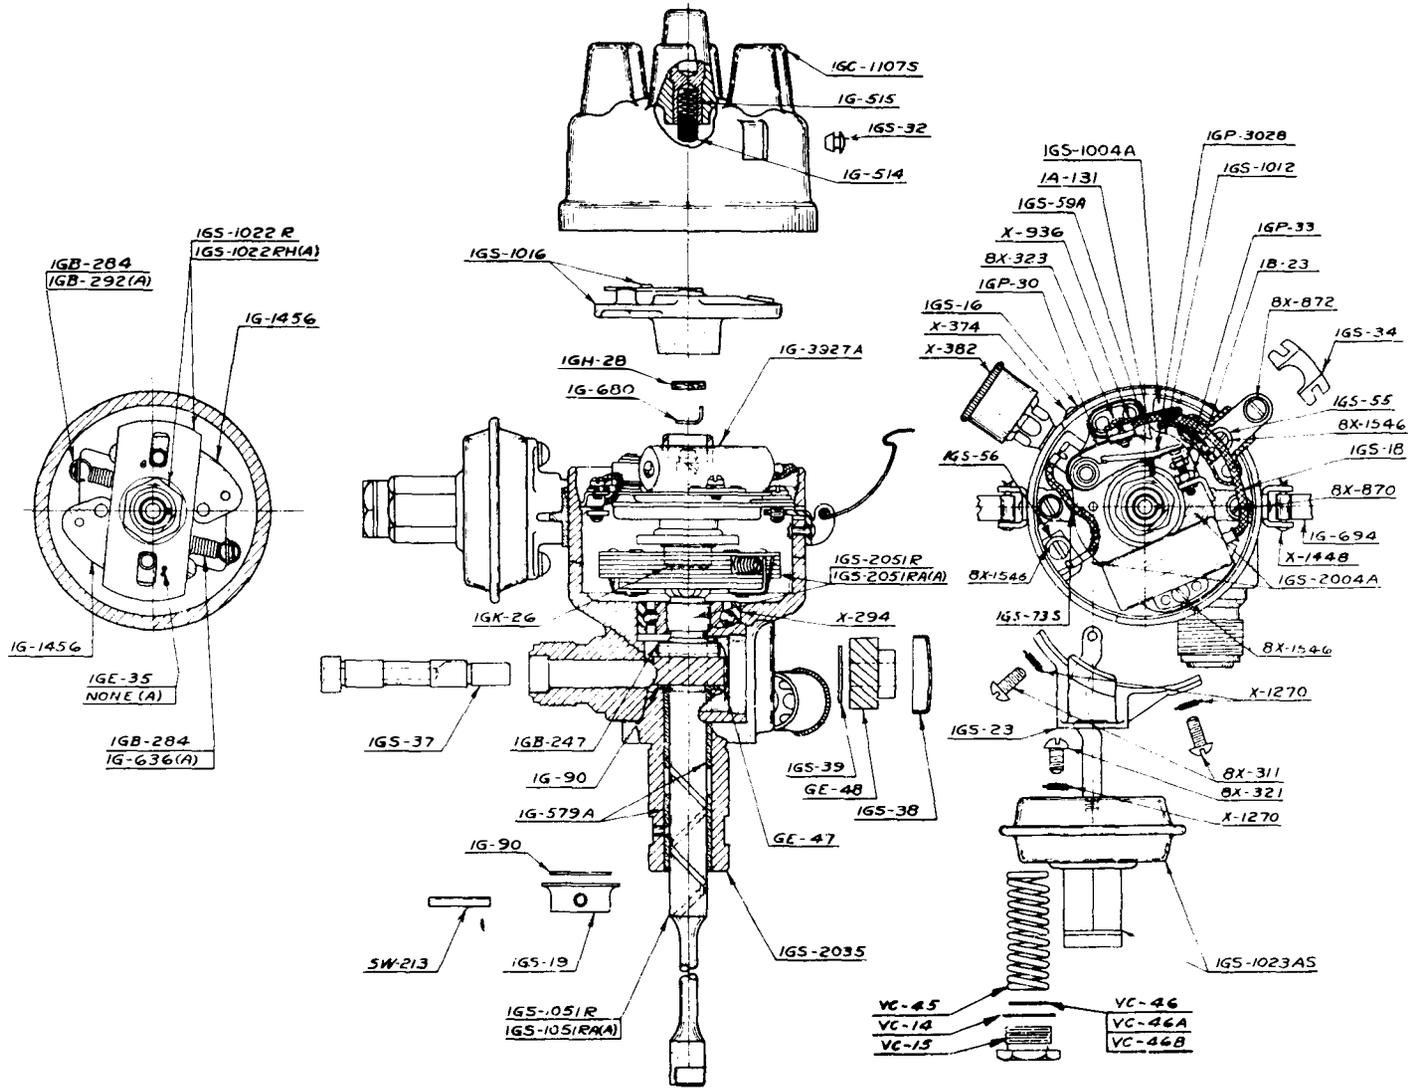

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4010,-1, DISTRIBUTOR PARTS LIST
A,B,-2,C,-1

IGS-4010,-1,
A,B,-2,C,-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
IG-90	1	1 2 3 4 5 Thrust Washer	IGS-55	1	1 2 3 4 5 Terminal
IG-680	1	Lock Spring Ring	X-936	1	Terminal
IGB-162	1	Thrust Washer	*	1	Breaker Plate Part Assy.
IGC-1107S	1	DISTRIBUTOR CAP ASSY.	IGS-1012	1	Breaker Sub Plate Assy.
IG-514	1	Contact Spring Plunger	IB-23	1	Breaker Point Lock Nut
IG-515	1	Contact Spring	IGP-331	1	Breaker Screw Point
IGS-32	1	Rubber Plug	IGS-73S	1	Lead Assembly
IGH-28	1	Cam Sleeve Felt Wick	IGS-56	1	Terminal
IGK-26	1	Washer - .020" Thick	8X-323	1	#6-32x5/16 Rd. Hd. Screw
IGS-18	2	Bearing Clamp	X-1012	4	#6 Lock Washer
IGS-19	1	Drive Shaft Collar	8X-1546	3	#6-32x5/32 Fill. Hd. Screw
*	1	Advance Pointer	IGS-2028	1	Dist. Base Assembly
IGS-23	1	Vacuum Chamber Bracket	IG-579A	2	Absorbent Bronze Brg.
IGS-34	1	Terminal Slot Cover	IG-694	2	Dist. Cap Spring
IGS-1016	1	ROTOR	X-382	1	1/8 Grease Cup
*	1	Cam & Stop Plate - 6 Cyl.R.H.	X-1448	2	Hinge Pin
*	1	Vacuum Chamber Assembly	*	1	Drive Shaft & Gov. Assy.
VC-14	1	Gasket - 1/32" Thick	*	1	Weight Spring Set
VC-15	1	Plug	IG-1456	2	Weight Assembly
VC-46	+	Washer - .032" Thick	IGS-1081RB	1	Drive Shaft Assembly
VC-46A	+	Washer - .010" Thick	SW-213	1	Dist. Drive Rivet
VC-46B	+	Washer - .065" Thick	8X-311	2	#10-32x3/8 Rd. Hd. Screw
*	1	Spring	8X-321	2	#10-32x5/16 Rd. Hd. Screw
*	1	Advance Control Arm Assy.	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IG-816C	1	Thrust Washer	X-1270	6	#10 Skpf. Washer
8X-135	1	1/4-20x2 Fill. Hd. Screw			1 2 3 4 5
8X-146	1	1/4-20 Hex. Nut			
12X-199	1	1/4 Lock Washer			
*	1	Breaker Plate Assy.			(Issued 2-1-40)
IA-131	1	Breaker Arm Spring Clip			* See table following parts list for part number applying to assembly wanted.
IG-5927A	1	CONDENSER ASSEMBLY			+ Use as required.
IGP-30281	1	Breaker Arm Assembly			† SERVICE BREAKER POINT SET IGP-3028A.
IGP-30	1	Breaker Arm Spring			
IGS-59A	1	Lead Assembly			

Assembly No.	Cam Assembly	Vacuum Chamber	Spring	Advance Arm	Advance Pointer
IGS-4010	IGS-1022RH	IGS-1023DS	VC-55 (Black)	None	None
IGS-4010-1	IGS-1022RH	IGS-1023DS	VC-55 (Black)	IGS-1020S	IGS-21
IGS-4010A	IGS-1022RG	IGS-1023DS	VC-55 (Black)	None	None
IGS-4010A-2	IGS-1022RG	IGS-1023DS	VC-55 (Black)	IGS-1027S	None
IGS-4010B	IGS-1022RH	IGS-1023DS	VC-55 (Black)	None	None
IGS-4010B-2	IGS-1022RH	IGS-1023DS	VC-55 (Black)	IGS-1027S	None
IGS-4010C	IGS-1022RH	IGT-1023ES	VC-45 (Red)	None	None
IGS-4010C-1	IGS-1022RH	IGT-1023ES	VC-45 (Red)	IGS-1020S	IGS-21

Assembly No.	Breaker Plate Assy.	Brkr. Plate Part Assy.	Dr. Shaft & Gov.	Weight Spr. Set
IGS-4010,-1	IGS-2004B	IGS-1004	IGS-2081RB	IGB-292SS
IGS-4010A,-2	IGS-2004B	IGS-1004	IGS-2081RD	IG-636SS
IGS-4010B,-2	IGS-2004	IGS-1004	IGS-2081RC	IG-636HS
IGS-4010C,-1	IGS-2004E	IGS-1004E	IGS-2081RB	IGB-292SS

UNIT	APPLICATION
IGS-4010	Chrysler, DeSoto, Dodge Truck, Fargo Truck
IGS-4010B	Dodge Truck, Fargo Truck
IGS-4010C	Chrysler

Printed in U.S.A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4011 DISTRIBUTOR PARTS LIST

IGS-4011

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	1	Thrust Washer				
IG-94	7	H.T. Wire Terminal				
IG-680	1	Lock Spring Ring				
IGB-162	1	Thrust Washer				
IGC-1107S	1	DISTRIBUTOR CAP ASSY.				
IG-514	1	Contact Spring Plunger				
IG-515	1	Contact Spring				
IGS-32	1	Rubber Plug				
IGE-36	1	Governor Control Spring				
IGH-28	1	Cam Sleeve Felt Wick				
IGH-53	1	Drive Shaft Extension				
IGH-54	1	Distributor Drive Sleeve				
IGH-55	1	Drive Shaft Pin				
IGH-1060	1	Advance Control Arm				
IGK-26	1	Washer - .020" Thick				
IGS-18	2	Bearing Clamp				
IGS-34	1	Terminal Slot Cover				
IGS-50	1	Vacuum Chamber Bracket				
IGS-1016	1	Rotor				
IGS-1022LB	1	Cam & Stop Plate - 6 Cyl. - L.H.				
IGS-2044B	1	Breaker Plate Assembly				
		† Identified by 7.5.				
IA-131	1	Breaker Arm Spring Clip				
IG-2671K	1	CONDENSER ASSY.				
IGP-3028L*	1	Breaker Arm Assy.				
IGP-30L	1	Breaker Arm Spring				
IGS-78	1	Lead Assembly				
IGS-77	1	Terminal				
X-1484	1	Terminal				
IGS-1044B	1	Brkr. Plate Part Assy.				
IGS-1046	1	Brkr. Sub Plate Assy.				
IB-23	1	Brkr. Point Lock Nut				
IGP-33*	1	Breaker Point Screw				
IGS-76S	1	Lead Assembly				
IGS-74	1	Terminal				
8X-323	1	#6-32x5/16 Rd. Hd. Screw				
8X-873	3	#6-32x3/16 Fill. Hd. Sc.				
X-1012	4	#6 Lock Washer				
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGS-2067	1	Distributor Base Assy.				
IG-511	1	Name Plate				
IG-579A	2	Absorbent Bronze Brg.				
IG-694	2	Dist. Cap Spring				
X-382	1	1/8 Grease Cup				
X-1201	2	.10x1/4 Tubular Rivet				
X-1448	2	Hinge Pin				
IGT-1028BS	1	Vacuum Chamber Assy.				
VC-14	1	Gasket - 1/32" Thick				
VC-15	1	Plug				
VC-46	**	Washer - .032" Thick				
VC-46A	**	Washer - .010" Thick				
VC-46B	**	Washer - .065" Thick				
VC-50	1	Spring (Orange)				
IGT-2034LA	1	Drive Shaft & Gov. Assy.				
IG-727*	1	Weight Spring				
IG-2456	2	Weight Assembly				
IGB-222*	1	Weight Spring				
IGT-1034LA	1	Drive Shaft Assy.				
SW-213	1	Dist. Drive Rivet				
X-196	1	#10 Lock Washer				
8X-309	2	#10-32x1/2 Rd. Hd. Sc.				
8X-321	2	#10-32x5/16 Rd. Hd. Sc.				
8X-870	2	#10-32x5/16 Fill. Hd. Sc.				
8X-872	1	#10-32x1/4 Fill. Hd. Sc.				
X-1270	6	#10 Skpf. Washer				
		1	2	3	4	5

(Issued 5-22-39)

† See Manual Bulletin IG-11.

* Service BREAKER POINT SET IGP-3028LS, & Service Weight Spring Set IG-727SS.


** Use as required.

UNIT	APPLICATION
IGS-4011	Packard

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

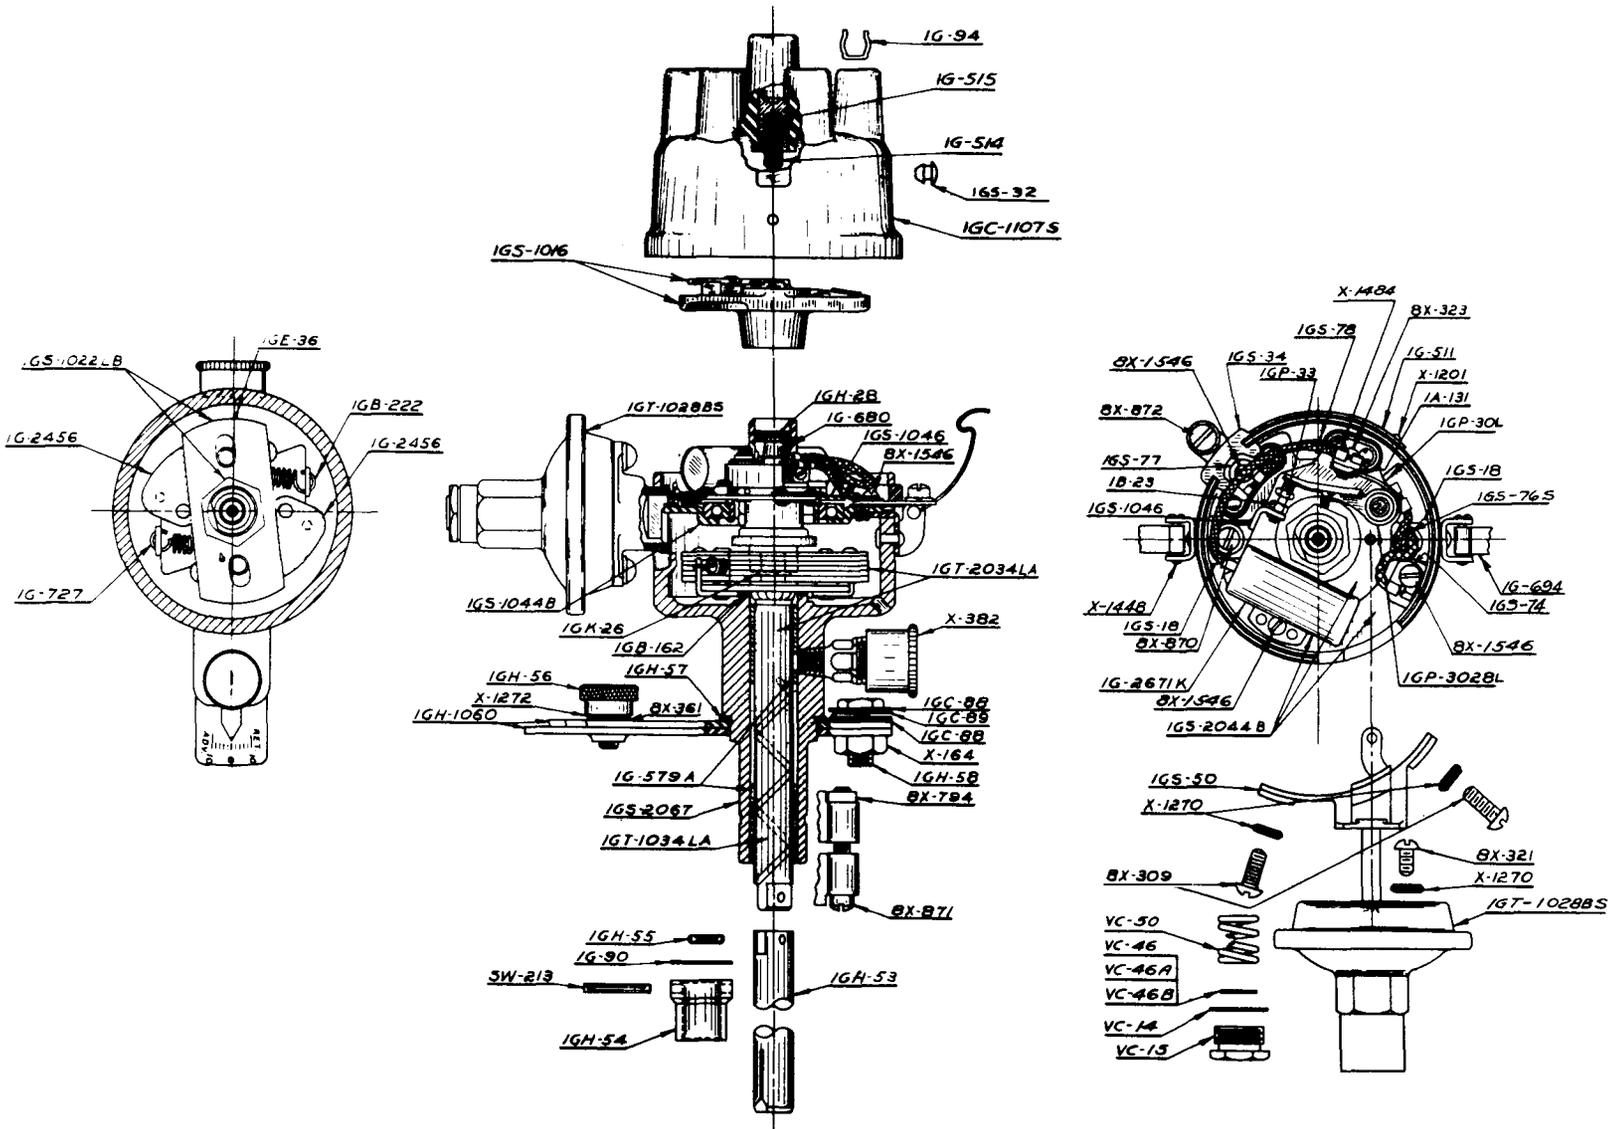

IGS-4011 DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4012 DISTRIBUTOR PARTS LIST

IGS-4012

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IG-90	1	Thrust Washer				
IG-94	7	H.T. Wire Terminal				
IG-680	1	Lock Spring Ring				
IGB-162	1	Thrust Washer				
IGC-136	1	Drive Shaft Collar				
IGC-1107S	1	Dist. Cap Assy.				
IG-514	1	Contact Spring Plunger				
IG-515	1	Contact Spring				
IGS-32	1	Rubber Plug				
IGE-35	1	Governor Control Spring				
IGH-28	1	Cam Sleeve Felt Wick				
IGK-26	1	Washer				
IGS-18	2	Bearing Clamp				
IGS-23	1	Vacuum Chamber Bracket				
IGS-34	1	Terminal Slot Cover				
IGS-1016	1	Rotor				
IGS-1022RO	1	Cam and Stop Plate 6 cyl. R.H.				
IGS-1023ES	1	Vacuum Chamber				
IGS-2004D	1	Breaker Plate Assy. * Identified by 7.5				
IA-131	1	Breaker Arm Spring Clip				
IG-2671F	1	Condenser Assembly				
IGP-3028†	1	Breaker Arm Assy.				
IGP-30	1	Breaker Arm Spring				
IGS-59A	1	Lead Assembly				
IGS-55	1	Terminal				
X-936	1	Terminal				
IGS-1004D	1	Breaker Plate Part Assy.				
IGS-1012	1	Breaker Sub Plate Assy.				
IB-23	1	Breaker Point Lock Nut				
IGP-33†	1	Breaker Point Screw				
8X-323	1	#6-32x5/16 Rd. Hd. Screw				
8X-873	3	#6-32x3/16 Fill. Hd. Sc.				
X-1012	4	#6 Lock Washer				
IGS-2053R	1	Drive Shaft & Gov. assy.				
IG-884†	2	Weight Spring				
IG-1456	2	Weight Assembly				
IGS-1053R	1	Drive Shaft Assy.				
		1	2	3	4	5

Part No.	No. Used	Name of Part				
		1	2	3	4	5
IGS-2069	1	Dist. Base Assy.				
IG-511	1	Name Plate				
IG-579A	2	Absorbent Bronze Brg.				
IG-694	2	Dist. Cap Spring				
X-382	1	1/8 Grease Cup				
X-1201	2	.10x1/4 Tubular Rivet				
X-1448	2	Hinge Pin				
SW-213	1	Dist. Drive Rivet				
X-196	1	#10 Lock Washer				
8X-311	2	#10-32x3/8 Rd. Hd. Screw				
8X-321	2	#10-32x5/16 Rd. Hd. Screw				
8X-870	2	#10-32x5/16 Fill. Hd. Sc.				
8X-872	1	#10-32x1/4 Fill. Hd. Sc.				
X-1270	6	#10 Skpf. Washer				
		1	2	3	4	5

(Issued 5-21-37)

* See Manual Bulletin IG-11.

† Service Breaker Point Set IGP-3028A & Service Weight Spring Set IG-884S.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4013 DISTRIBUTOR PARTS LIST

IGS-4013

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGT-2028AS	1	Vacuum Chamber Assy.
IG-94	7	H.T. Wire Terminal	VC-14	1	Gasket - 1/32" Thick
IG-680	1	Lock Spring Ring	VC-15	1	Plug
IGB-162	1	Thrust Washer	VC-46	*	Washer - .032" Thick
IGC-1107S	1	Dist. Cap Assy.	VC-46A	*	Washer - .010" Thick
IG-514	1	Contact Spring Plunger	VC-46B	*	Washer - .065" Thick
IG-515	1	Contact Spring	VC-50	1	Spring (Orange)
IGS-32	1	Rubber Plug	IGT-2034LC	1	Drive Shaft & Gov. Assy.
IGE-36	1	Governor Control Spring	IG-2456	2	Weight Assy.
IGH-28	1	Cam Sleeve Felt Wick	IGB-210‡	1	Weight Spring
IGH-53B	1	Drive Shaft Extension	IGB-222‡	1	Weight Spring
IGH-54	1	Dist. Drive Sleeve	IGT-1034LA	1	Drive Shaft Assy.
IGH-55	1	Drive Shaft Pin	SW-213	1	Dist. Drive Rivet
IGK-26	1	Washer - .020" Thick	X-196	1	#10 Lock Washer
IGS-18	2	Bearing Clamp	8X-309	2	#10-32x1/2 Rd. Hd. Screw
IGS-34	1	Terminal Slot Cover	8X-321	2	#10-32x5/16 Rd. Hd. Screw
IGS-50	1	Vacuum Chamber Bracket	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IGS-1016	1	Rotor	8X-872	1	#10-32x1/4 Fill. Hd. Screw
IGS-1022LC	1	Cam & Stop Plate - 6 Cyl. L.H.	X-1270	6	#10 Skpf. Washer
IGS-2044B	1	Breaker Plate Assy.			1 2 3 4 5
		‡ Identified by 7.5			(Issued 9-26-38)
IA-131	1	Breaker Arm Spring Clip			
IG-2671K	1	Condenser Assy.			
IGP-3028L‡	1	Breaker Arm Assy.			
IGP-30L	1	Breaker Arm Spring			
IGS-78	1	Lead Assy.			
IGS-77	1	Terminal			
X-1484	1	Terminal			
IGS-1044B	1	Breaker Plate Part Assy.			
IGS-1046	1	Breaker Sub Plate Assy.			
IB-23	1	Breaker Point Lock Nut			
IGP-33‡	1	Breaker Point Screw			
IGS-76S	1	Lead Assy.			
IGS-74	1	Terminal			
8X-323	1	#6-32x5/16 Rd. Hd. Screw			
8X-873	3	#6-32x3/16 Fill. Hd. Screw			
X-1012	4	#6 Lock Washer			
IGS-2067	1	Dist. Base Assy.			
IG-511	1	Name Plate			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-382	1	1/8 Grease Cup			
X-1201	2	.10 1/4 Tubular Rivet			
X-1448	2	Hinge Pin			
		1 2 3 4 5			

‡ Service Weight Spring Set IGB-210AS & Service Breaker Point Set IGP-3028LS


* Use as required.

‡ See Manual Bulletin IG-11.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

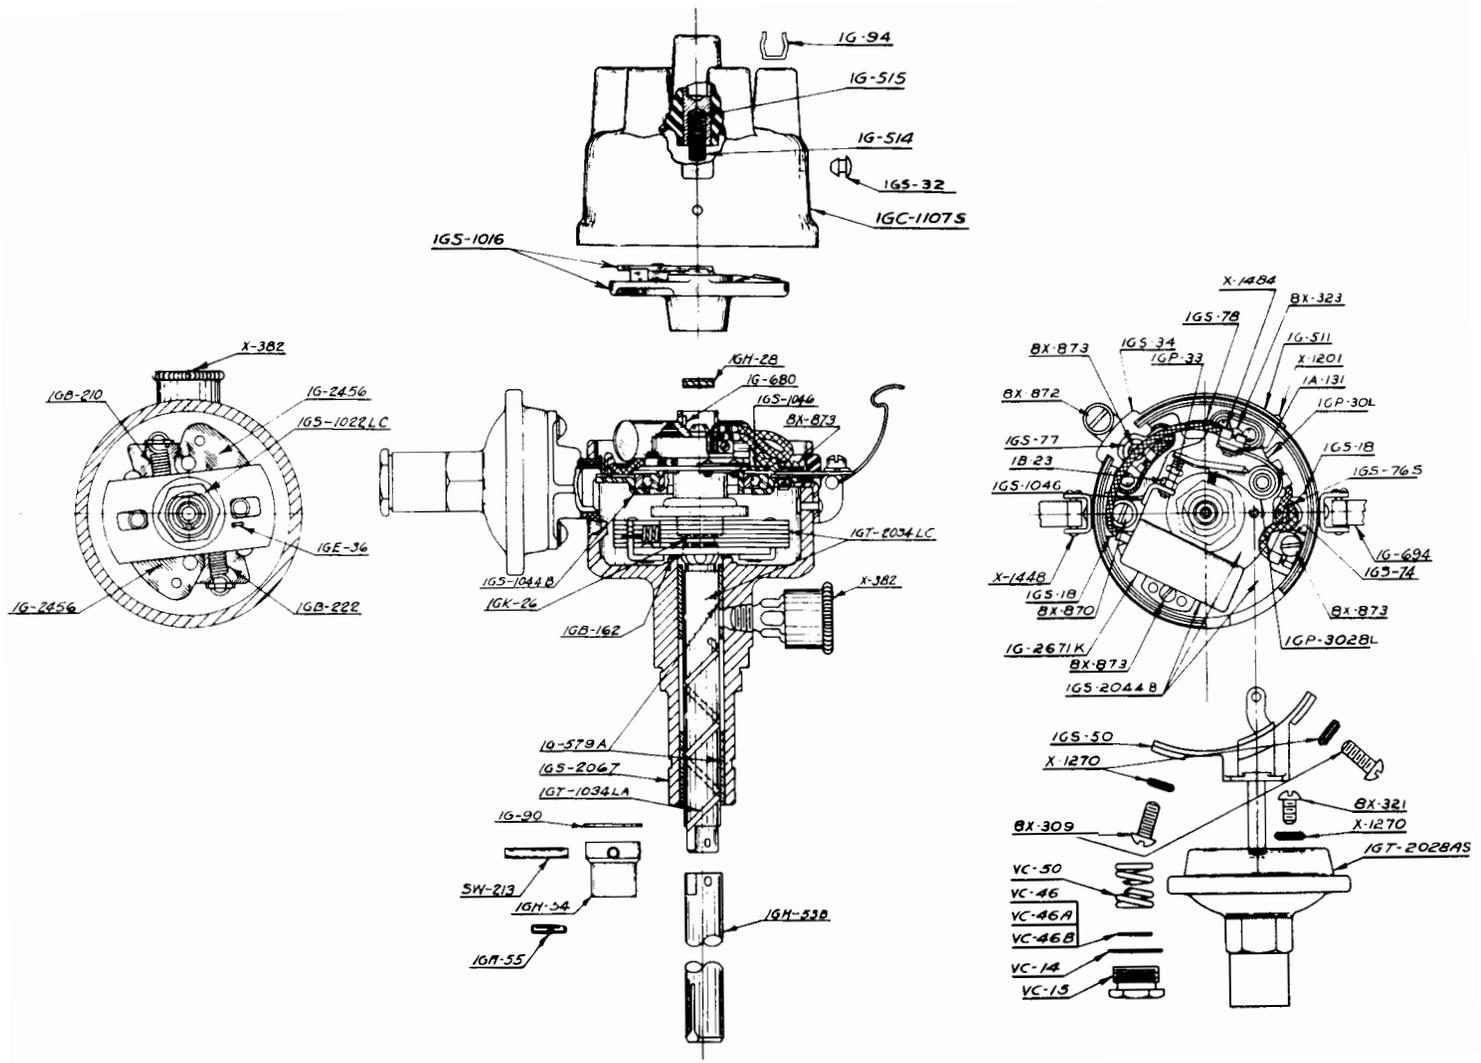

IGS-4013 DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4014,-1 DISTRIBUTOR PARTS LIST

IGS-4014,-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGS-1004	1	Breaker Plate Part Assy.
IG-680	1	Lock Spring Ring	IGS-1012	1	Breaker Sub Plate Assy.
IGB-162	1	Thrust Washer	IB-23	1	Breaker Point Lock Nut
IGC-1107S	1	Dist. Cap Assy.	IGP-33†	1	Breaker Screw Point
IG-514	1	Contact Spring Plunger	IGS-73S	1	Lead Assy.
IG-515	1	Contact Spring	IGS-56	1	Terminal
IGS-32	1	Rubber Plug	8X-323	1	#6-32x5/16 Rd. Hd. Screw
IGH-28	1	Cam Sleeve Felt Wick	8X-873	3	#6-32 x3/16 Fill. Hd. Screw
IGK-26	1	Washer - .020" Thick	X-1012	4	#6 Lock Washer
IGS-18	2	Bearing Clamp	IGS-2081R	1	Drive Shaft & Gov. Assy.
IGS-19	1	Drive Shaft Collar	IG-636†	1	Weight Spring
IGS-23	1	Vacuum Chamber Bracket	IG-1456	2	Weight Assy.
IGS-34	1	Terminal Slot Cover	IGB-292†	1	Weight Spring
IGS-1016	1	Rotor	IGS-1081R	1	Drive Shaft Assy.
IGS-1022RE	1	Cam & Stop Plate - 6 Cyl.- R. H.	SW-213	1	Dist. Drive Rivet
IGS-1023DS	1	Vacuum Chamber Assy.	8X-311	2	#10-32x3/8 Rd. Hd. Screw
VC-14	1	Gasket - 1/32" Thick	8X-321	2	#10-32x5/16 Rd. Hd. Screw
VC-15	1	Plug	8X-870	2	#10-32x5/16 Fill. Hd. Screw
VC-46	*	Washer - .032" Thick	X-1270	6	#10 Skpf. Washer
VC-46A	*	Washer - .010" Thick			1 2 3 4 5
VC-46B	*	Washer - .065" Thick			
VC-55	1	Spring (Black)			
IGS-1027S†	1	Advance Control Arm Assy.			(Issued 8/12/38)
IG-816C†	1	Thrust Washer			
8X-135†	1	1/4-20x2 Fill. Hd. Screw			
8X-146†	1	1/4-20 Hex. Nut			
12X-199†	1	1/4 Lock Washer			
IGS-2001	1	Dist. Base Assy.			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-382	1	1/8 Grease Cup			
X-1448	2	Hinge Pin			
IGS-2004	1	Breaker Plate Assy. ± Identified by 10			
IA-131	1	Brkr. Arm Spring Clip			
IG-3927A	1	Condenser Assy.			
IGP-3028†	1	Breaker Arm Assy.			
IGP-30	1	Breaker Arm Spring			
IGS-59A	1	Lead Assy.			
IGS-55	1	Terminal			
X-936	1	Terminal			
		1 2 3 4 5			

* Use as required.

† Used with assemblies having a suffix "-1".


† Service Breaker Point Set IGP-3028A, and Service Weight Spring Set IGB-292SS.

± See Manual Bulletin IG-11.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

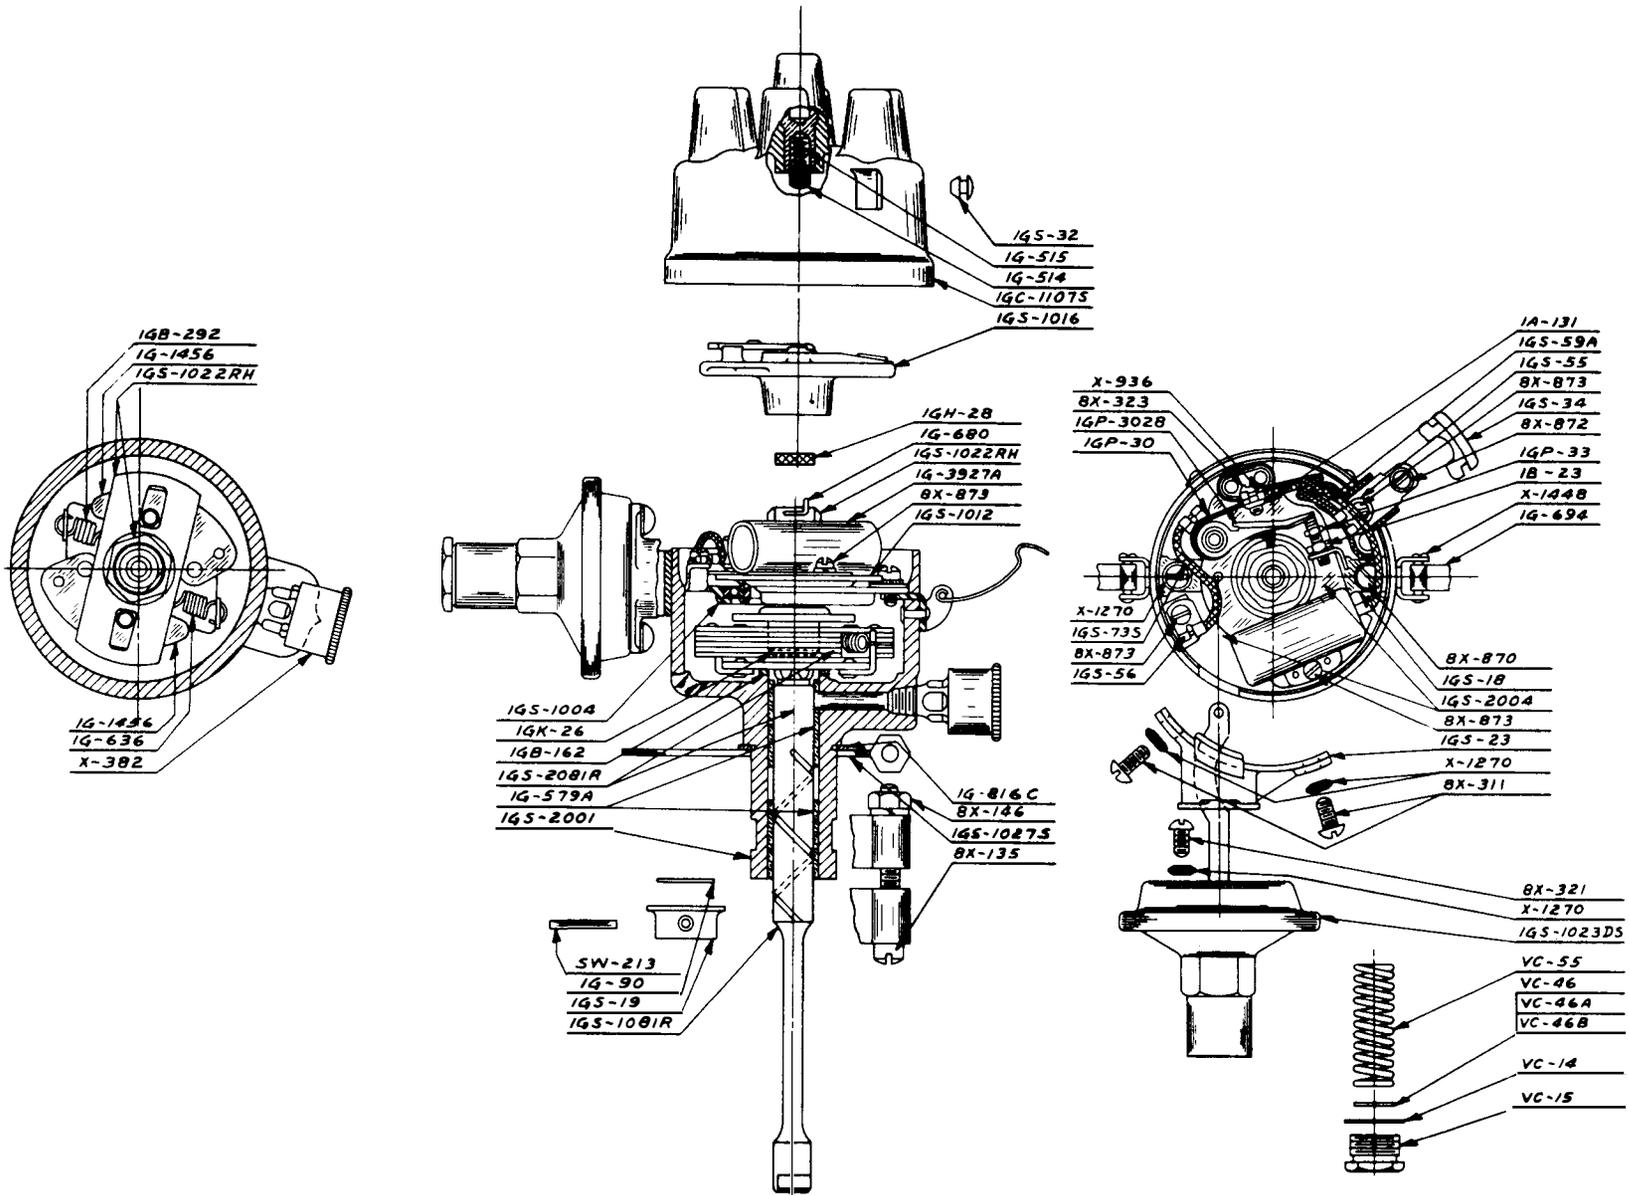

IGS-4014-1 DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4015, -1 DISTRIBUTOR PARTS LIST

IGS-4015, -1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGS-59A	1	Lead Assy.
IG-680	1	Sleeve Retaining Spring	IGS-55	1	Terminal
IGB-162	1	Thrust Washer	X-936	1	Terminal
IGC-1107S	1	Dist. Cap Assy.	IGS-1004	1	Breaker Plate Part Assy.
IG-514	1	Contact Spring Plunger	IGS-1012	1	Breaker Sub Plate Assy.
IG-515	1	Contact Spring	IB-23	1	Breaker Point Lock Nut
IGS-32	1	Rubber Plug	IGP-33‡	1	Breaker Screw Point
IGE-35	1	Governor Control Spring	IGS-73S	1	Lead Assy.
IGH-28	1	Cam Sleeve Felt Wick	IGS-56	1	Terminal
IGK-26	1	Washer - .020" Thick	8X-323	1	#6-32x5/16 Rd. Hd. Screw
IGS-18	2	Bearing Clamp	8X-873	3	#6-32x3/16 Fill. Hd. Screw
IGS-19	1	Drive Shaft Collar	X-1012	4	#6 Lock Washer
IGS-23	1	Vacuum Chamber Bracket	IGS-2081RA	1	Drive Shaft & Gov. Assy.
IGS-34	1	Terminal Slot Cover	IG-1456	2	Weight Assy.
IGS-1016	1	Rotor	IGB-208‡	2	Weight Spring
IGS-1022RJ	1	Cam & Stop Plate - 6 Cyl. R. H.	IGS-1081RA	1	Drive Shaft Assy.
IGS-1023DS	1	Vacuum Chamber Assy.	SW-213	1	Dist. Drive Rivet
VC-14	1	Gasket - 1/32" Thick	8X-311	2	#10-32x3/8 Rd. Hd. Screw
VC-15	1	Plug	8X-321	2	#10-32x5/16 Rd. Hd. Screw
VC-46	*	Washer - .032" Thick	8X-870	2	#10-32x5/16 Fill. Hd. Screw
VC-46A	*	Washer - .010" Thick	X-1270	6	#10 Skpf. Washer
VC-46B	*	Washer - .065" Thick			1 2 3 4 5
VC-55	1	Spring (Black)			(Issued 8/4/38)
IGS-1027S†	1	Advance Control Arm Assy.			
IG-816C†	1	Thrust Washer			
8X-135†	1	1/4-20x2 Fill. Hd. Screw			
8X-146†	1	1/4-20 Hex. Nut			
12X-199†	1	1/4 Lock Washer			
IGS-2001	1	Dist. Base Assy.			
IG-579A	2	Absorbent Bronze Brg.			
IG-694	2	Dist. Cap Spring			
X-382	1	1/8 Grease Cup			
X-1448	2	Hinge Pin			
IGS-2004	1	Breaker Plate Assy. ‡ Identified by 10			
IA-131	1	Breaker Arm Spring Clip			
IG-3927A	1	Condenser Assy.			
IGP-3028‡	1	Breaker Arm Assy.			
IGP-30	1	Breaker Arm Spring			
		1 2 3 4 5			

* Use as required.

† Used with assemblies having a suffix "-1".


‡ Service Breaker Point Set IGP-3028A, and Service Weight Spring Set IGB-208S.

‡ See Manual Bulletin IG-11.

Printed in U. S. A.

File in
Equipment & Parts List Binder

"NOTE: Where part numbers are shown in parenthesis they are for reference only. By stocking sub-parts the complete part can be assembled as needed."

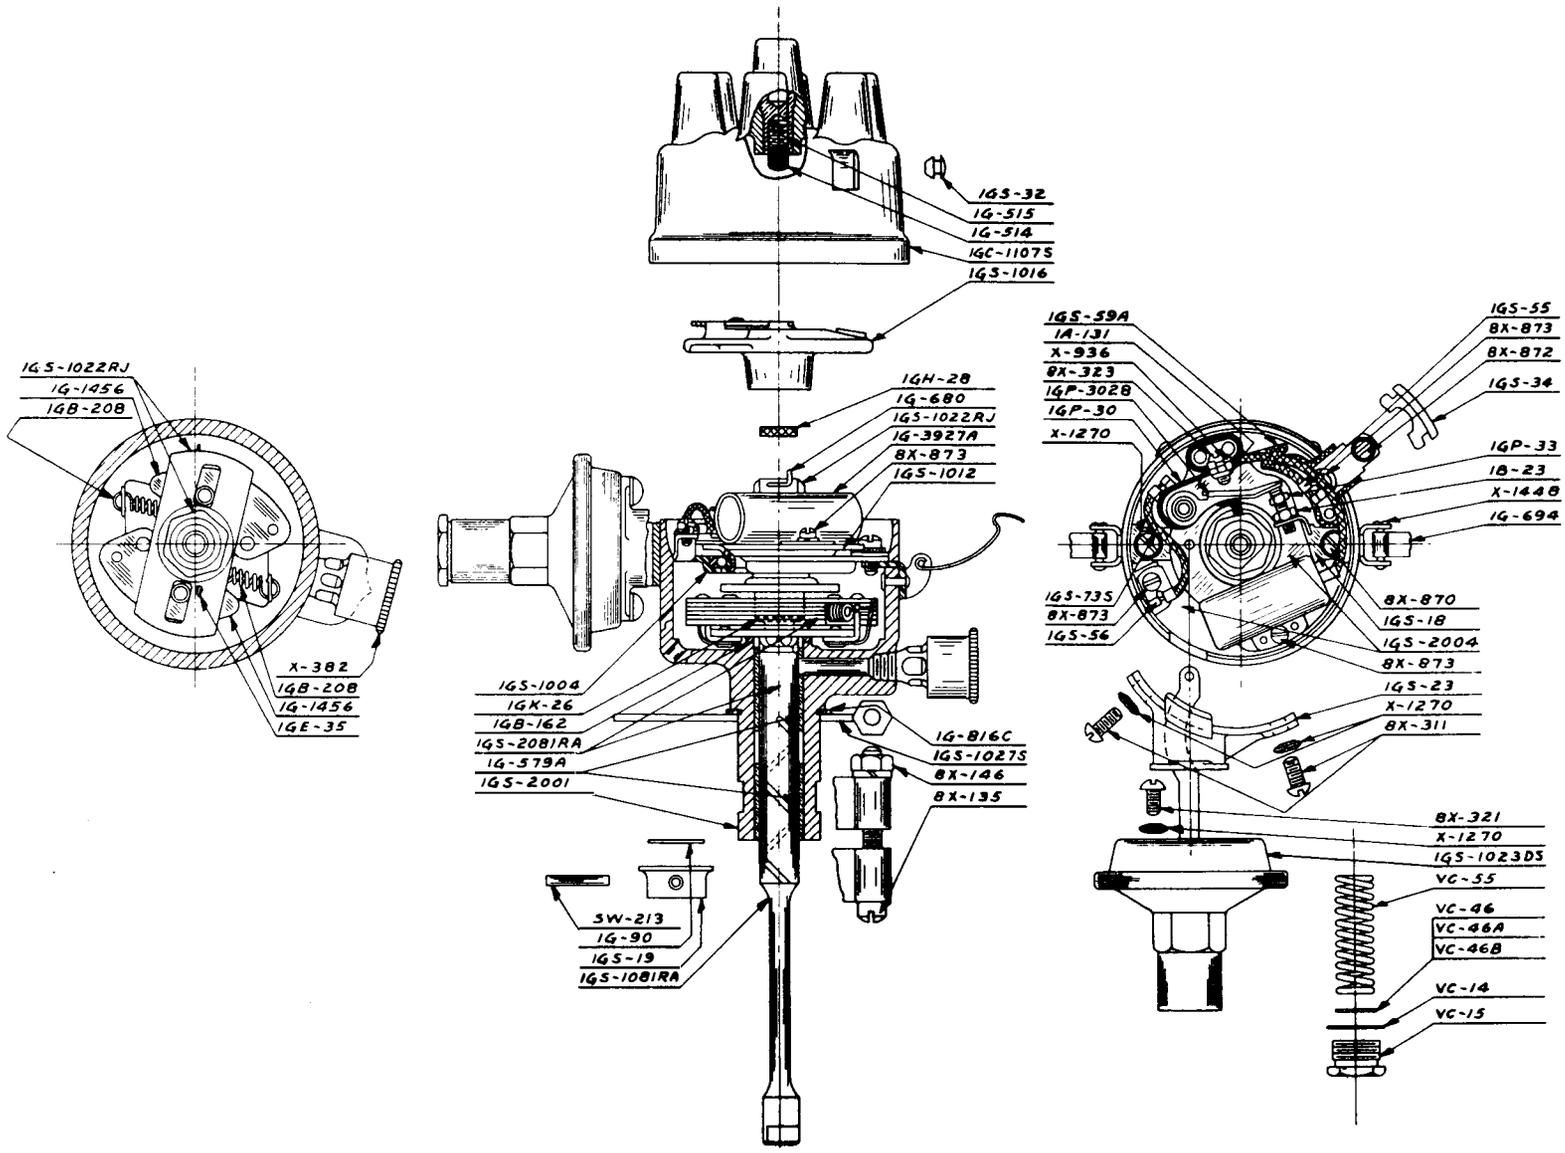

IGS-4015-1 DISTRIBUTOR ILLUSTRATION

ELECTRIC AUTO-LITE EQUIPMENT & PARTS LISTS

IGS-4101A, DISTRIBUTOR PARTS LIST
B,C,-1

IGS-4101A,
B,C,-1

Part No.	No. Used	Name of Part	Part No.	No. Used	Name of Part
		1 2 3 4 5			1 2 3 4 5
IG-90	1	Thrust Washer	IGS-2028	1	Dist. Base Assy.
IG-680	1	Lock Spring Ring	IG-579A	2	Absorbent Eronze Brg.
IGB-162	1	Thrust Washer	IG-694	2	Dist. Cap Spring
IGC-1107S	1	Dist. Cap Assy.	X-382	1	1/8 Grease Cup
IG-514	1	Contact Spring Plunger	X-1448	2	Hinge Pin
IG-515	1	Contact Spring	*	1	Breaker Plate Assy.
IGS-32	1	Rubber Plug	IA-131	1	Breaker Arm Spring Clip
IGH-28	1	Cam Sleeve Felt Wick	IG-3927A	1	Condenser Assy.
IGK-26	1	Washer - .020" Thick	IGP-3028†	1	Breaker Arm Assy.
IGS-18	2	Bearing Clamp	IGP-30	1	Breaker Arm Spring
IGS-19	1	Drive Shaft Collar	IGS-59A	1	Lead Assy.
IGS-23	1	Vacuum Chamber Bracket	IGS-55	1	Terminal
IGS-34	1	Terminal Slot Cover	X-936	1	Terminal
IGS-1016	1	Rotor	IGS-89	1	Lead Assy.
IGS-1020S†	1	Advance Control Arm Assy.	IGS-88	2	Terminal
IG-816C†	1	Thrust Washer	*	1	Breaker Plate Part Assy.
8X-135†	1	1/4-20x2 Fill. Hd. Screw	IGS-1082R	1	Breaker Sub Plate Assy.
8X-146†	1	1/4-20 Hex. Nut	IGS-1086RM†	1	Breaker Point
12X-199†	1	1/4 Lock Washer	8X-884	1	#8-32x3/16 Fill. Hd. Sc.
IGS-1022RH	1	Cam & Stop Plate - 6 Cyl.R.H.	12X-1275	1	#8 Lock Washer
*	1	Vacuum Chamber Assy.	8X-323	1	#6-32x5/16 Rd. Hd. Screw
VC-14	1	Gasket - 1/32" Thick	X-1012	5	#6 Lock Washer
VC-15	1	Plug	8X-1546	4	#6-32x5/32 Fill. Hd. Screw
VC-46	+	Washer - .032" Thick	SW-213	1	Distributor Drive Rivet
VC-46A	+	Washer - .010" Thick	8X-311	2	#10-32x3/8 Rd. Hd. Screw
VC-46B	+	Washer - .065" Thick	8X-321	2	#10-32x5/16 Rd. Hd. Screw
*	1	Spring	8X-870	2	#10-32x5/16 Fill. Hd. Screw
IGS-2024RG	1	Drive Shaft & Gov. Assy.	X-1270	6	#10 Skpf. Washer
IG-636†	1	Weight Spring			1 2 3 4 5
IG-1456	2	Weight Assy.			
IGB-292†	1	Weight Spring			
IGS-1024RC	1	Drive Shaft Assy.			
		1 2 3 4 5			


(Issued 10-18-38)

Assy. No.	Breaker Plate Assy.	Brkr. Plate Part Assy.	Vacuum Chamber	Spring
IGS-4101A	IGS-3004B	IGS-1004A	IGS-1023S	VC-49 (Blue)
IGS-4101A-1	IGS-3004B	IGS-1004A	IGS-1023S	VC-49 (Blue)
IGS-4101B	IGS-3004C	IGS-1004	IGS-1023DS	VC-55 (Black)
IGS-4101B-1	IGS-3004C	IGS-1004	IGS-1023DS	VC-55 (Black)
IGS-4101C	IGS-3004B	IGS-1004A	IGT-1023GS	VC-73 (Maroon)
IGS-4101C-1	IGS-3004B	IGS-1004A	IGT-1023GS	VC-73 (Maroon)

† Used with assemblies having the suffix "-1".

‡ Service Breaker Point Set IGP-3028ES, & Service Weight Spring Set IGB-292SS.

+ Use as required.

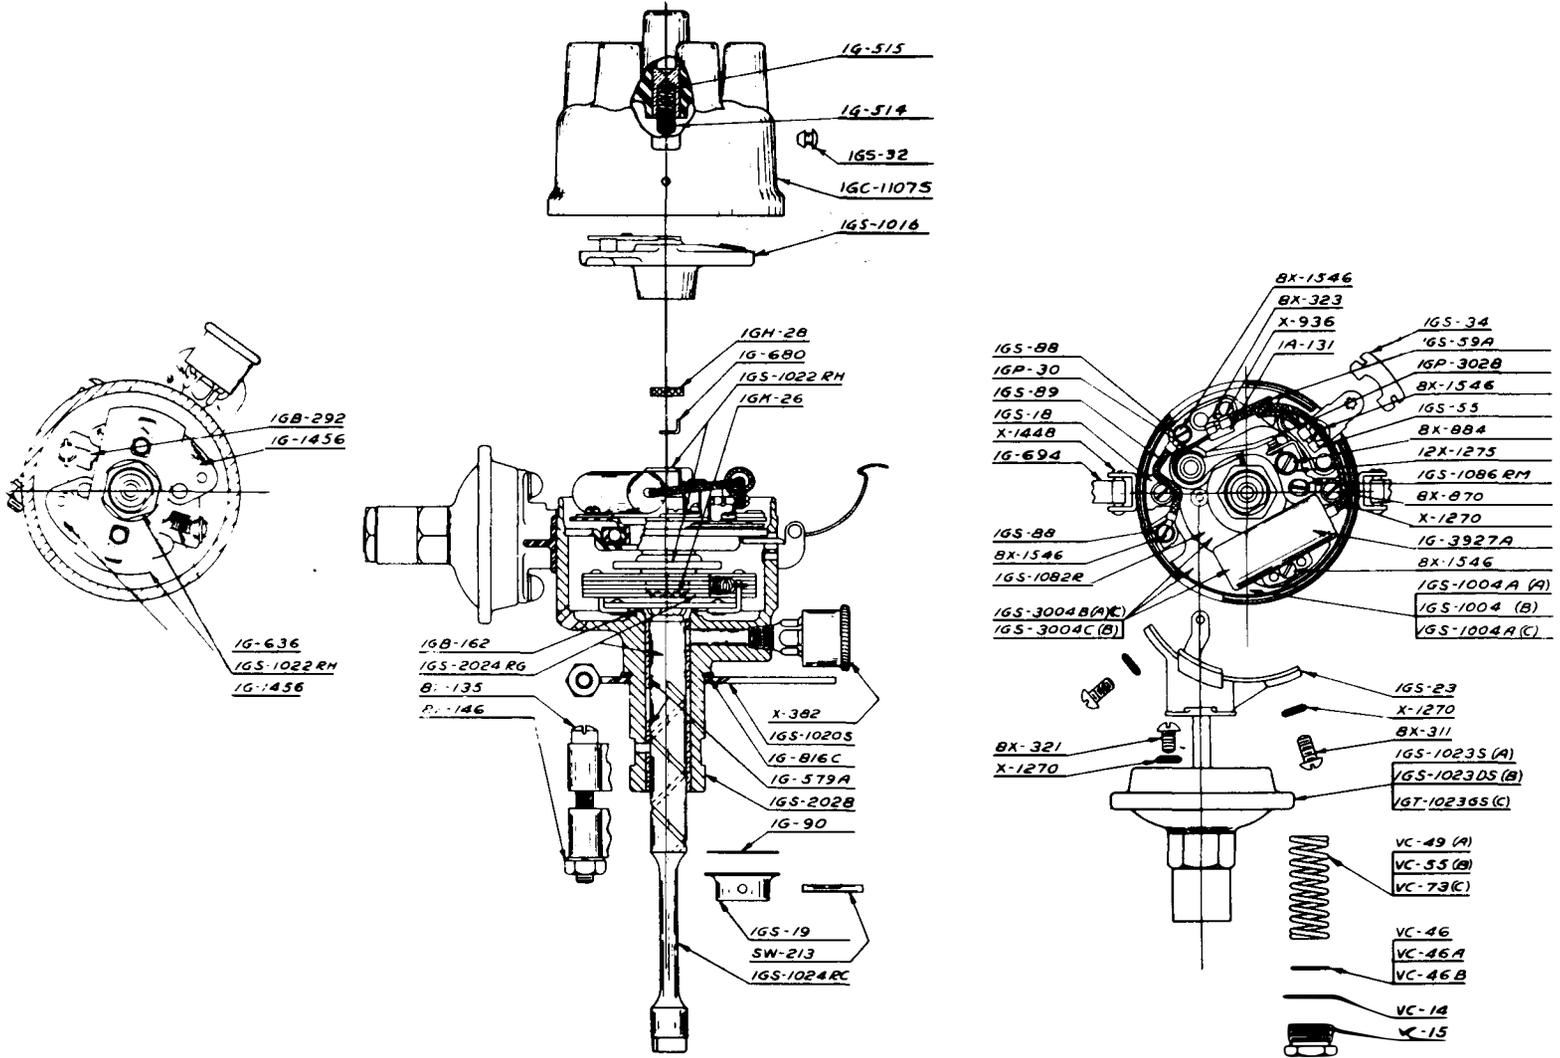

IGS-4101A,B,C,-1 DISTRIBUTOR ILLUSTRATION